

GainMaker 1002 MHz High Output High Gain Dual (HGD) System Amplifier 5-85/105-1002 MHz

The Cisco GainMaker[®] broadband amplifier platform includes a variety of RF amplifiers that address the divergent needs of today's broadband networks. All GainMaker amplifiers provide superior two-way performance and reliability combined with a user-friendly layout. All share common plug-in accessories and now perform to 1 GHz in the forward path. The System Amplifiers in this family provide multiple forward RF output ports, while the Line Extenders provide a single forward RF output port.

GainMaker System Amplifiers use gallium arsenic field-effect transistor (GaAsFET) technology in the interstage and output gain stages for improved distortion performance.

The GainMaker High Output System Amplifier modules are capable of higher output levels than standard GainMaker System Amplifier modules, and are mechanically compatible with previous System Amplifier II, II+, III, and GainMaker housing bases. The DC power supply is modular and located in an updated housing lid for easy access. All GainMaker System Amplifier modules are factory configured with reverse amplifier, diplex filters, thermal compensation circuit, forward interstage pads, and interstage equalizer to help ensure optimal performance. Optional single-pilot Automatic Gain Control (AGC) configurations are also available.

The GainMaker High Output High Gain Dual (HGD) System Amplifier is ideally suited for providing high (bridger) level RF to the feeder network (Figure 1). It provides two forward RF outputs (main and auxiliary), with the option to create a third RF output using an optional plug-in auxiliary path signal director.

Figure 1. GainMaker HGD System Amplifier




Features

- Capable of higher output levels than standard output 1-GHz GainMaker amplifiers
- Common RF test points for forward output and reverse injection simplify reverse balancing
- Increased forward gain to facilitate drop-in bandwidth extensions without respacing
- High-performance GaAsFET gain stage technology
- Fixed-value, plug-in accessories are common to all GainMaker products
- 60V and 90V AC powering capability
- 15A current capacity (steady state) and 25A surge survivability
- AGC has Thermal backup, which eliminates disruptive RF output variation in the event of pilot loss
- Quadrature amplitude modulation (QAM) pilot AGC now available in addition to existing analog carrier AGCs
- Improved hum modulation
- Plug-in, self-contained diplex filters
- Modular high-efficiency power supply allows simplified maintenance
- Reverse input pad and RF test point for each reverse input port allow optimum reverse path design and alignment
- Directional Coupler RF test points provide best accuracy
- Surge-resistant circuitry helps ensure gain stage protection without fuses or other nuisance failure-causing devices

Figure 2 shows a block diagram of the HGD system amplifier.

Figure 2. GainMaker HGD System Amplifier Block Diagram

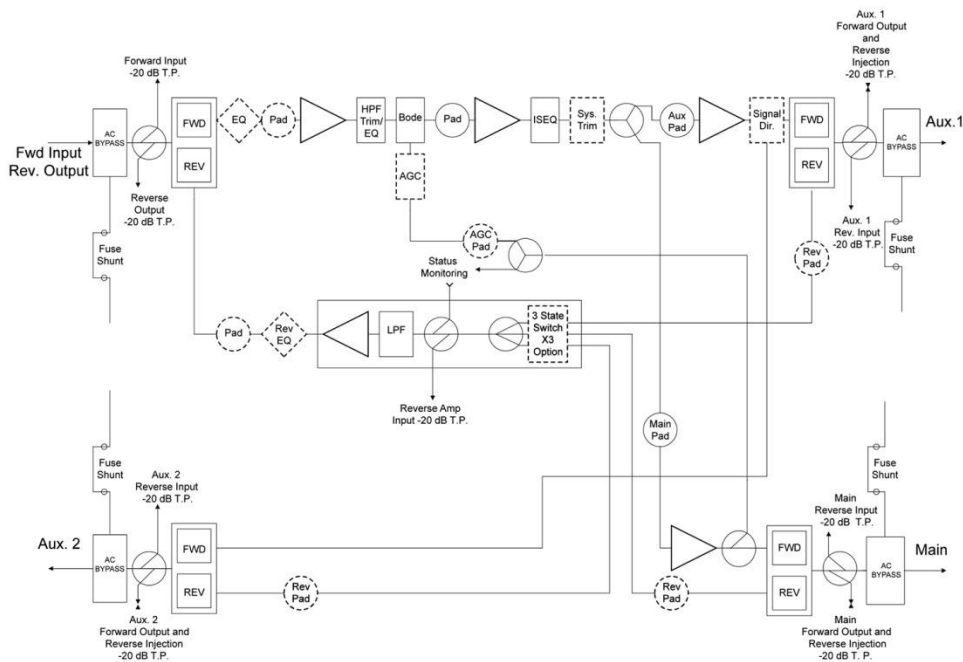

Specifications

Tables 1 through 6 list the specifications for the Cisco GainMaker 1002 MHz High Output HGD System Amplifier 5-85/105-1002 MHz.

Table 1. General Station Performance

General Station Performance	Units	Forward	Reverse	Notes
Pass band	MHz	105-1002	5-85	
Amplifier type	–	GaAs FET	PP	
Frequency response	dB	± 0.5	± 0.5	
Auto slope and gain range	dB	± 5.5	n/a	
Return loss	dB	16	16	7
Max AC through current (continuous)	Amps	15	–	
Max AC through current (surge)	Amps	25	–	
Hum modulation @ 12A (over specified frequency range)	dB	70 (105-870 MHz) 60 (870-1002 MHz)	60 (5-10 MHz) 70 (11-85 MHz)	
Hum modulation @ 15A (over specified frequency range)	dB	65 (105-870 MHz) 60 (870-1002 MHz)	60 (5-10 MHz) 65 (11-85 MHz)	
Test points (± 0.5 dB)	dB	-20	-20	
Reference output level @... 1002 MHz 870 MHz 750 MHz 650 MHz 550 MHz 105 MHz	dBmV	56.0 54.0 52.2 50.5 49.0 42.3	35 (@ 42 MHz) 35 (@ 5 MHz)	
Reference output tilt (105-1002 MHz)	dB	13.7	–	1

Table 2. Forward Station Performance

Forward Station Performance	Units	Auto/Thermal with 10.5 dB I/S EQ	Notes
Operational gain (minimum)	dB	43	2
Internal tilt (± 0.5 dB)	dB	+13.8	3
Noise figure @ 54 MHz	dB	8.5	2
Noise figure @ 1 GHz	dB	8.0	2
78 NTSC Channels (CW) with Digital			4
Composite triple beat	dB	67	9
Cross modulation	dB	63	5, 9
Composite second order (high side)	dB	64	9
Composite intermodulation noise (CIN)	dB	60	8, 9

Table 3. Reverse Station Performance

Reverse Station Performance	Units	Auto/Thermal with 10.5 dB I/S EQ	Notes
Operational gain (minimum)	dB	19.0	6, 7
Internal tilt (± 0.5 dB)	dB	-0.5	3
Noise figure	dB	12	6, 7

Reverse Station Performance	Units	Auto/Thermal with 10.5 dB I/S EQ	Notes
6 NTSC Channels (CW)			
Composite triple beat	dB	92	9
Cross modulation	dB	80	5, 9
Composite second order (high side)	dB	82	9

Unless otherwise noted, specifications reflect typical performance and are referenced to 68°F (20°C). Specifications are based upon measurements made in accordance with SCTE/ANSI standards (where applicable), using standard frequency assignments.

Table 4. Station Delay Characteristics

Station Delay Characteristics			
Forward (Chrominance to Luminance Delay)		Reverse (Group Delay in 1.5-MHz bandwidth)	
Frequency (MHz)	Delay (ns)	Frequency (MHz)	Delay (ns)
109.25 – 112.83	13	5.0 – 6.5	60
115.25 – 118.83	7	6.5 – 8.0	22
121.25 – 124.83	5	8.0 – 9.5	12
		80.5 – 82.0	10
		82.0 – 83.5	13
		83.5 – 85.0	18

Table 5. Station Powering Data

Station Powering Data														
GainMaker High Output HGD	I _{DC} (Amps)	AC Voltage												
			90	85	80	75	70	65	60	55	50	45	40	35
Thermal	1.7	AC current (A)	0.74	0.75	0.73	0.73	0.73	0.77	0.93	0.94	1.03	1.14	1.28	1.49
		Power (W)	46.6	46.4	46.0	46.6	46.0	46.0	45.8	45.6	45.8	45.9	46.0	46.4
AGC	1.75	AC current (A)	0.75	0.77	0.74	0.75	0.75	0.79	0.95	0.97	1.06	1.17	1.33	1.51
		Power (W)	47.9	47.6	47.3	47.3	47.2	47.4	47.0	47.1	47.2	47.2	47.4	46.9

Data is based on stations configured for two-way operation. AC currents specified are based on measurements made with typical CATV type ferroresonant AC power supply (quasi-square wave), and GainMaker High Output System Amplifier power supply (2.5A, 24V DC, pn 4022846).

DC supply has a user-configurable 30V, 40V, or 50V AC under-voltage lockout circuit. Default setting is 30V. 40V or 50V AC under-voltage lockout may be selected by changing the position of the lockout jumper.

Notes:

1. Reference output tilt is specified as “linear” tilt (as opposed to “cable” tilt).
2. Forward gain and noise figure measured with 0 dB input EQ and 1 dB input pad.
3. Down tilt, the effect of cable, is represented by a (-). Up tilt, the effect of equalization, is represented by a (+).
4. 73 CW NTSC channels loaded from 115 to 550 MHz. Digital refers to 550–1002 MHz loading with QAM carriers at -6 dB levels relative to analog video carrier levels.
5. X-mod (@ 15.75 kHz) specified using 100% synchronous modulation and frequency selective measurement device.

6. Reverse gain and noise figure for station with 0 dB reverse input pad, 0 dB reverse output EQ, and 1 dB output pad.
7. Reverse operational gain, noise figure, and return loss are specified without reverse switch option. If switch is installed, reduce gain by 0.5 dB, increase noise figure by 0.5 dB, and decrease return loss by 1 dB.
8. Composite intermodulation noise is a broadband noise like distortion product associated with QAM loading.
9. Distortion performance at reference output levels and tilt. Contact Cisco Engineering for CIN calculation.

Table 6. Environmental and Mechanical Specifications

Environmental	
Operating temperature range	-40 to 140°F (-40 to 60°C)
Mechanical	
Housing dimensions (LxHxD)	17.3 in. x 7.2 in. x 7.8 in. 439.4 mm x 182.9 mm x 198.1 mm
Weight	
<ul style="list-style-type: none"> • Housing with power supply • Module 	12 lb 5 oz. (5.6 kg) 5 lb 5 oz. (2.4 kg)

Ordering Information

The **GainMaker Ordering Matrix** provides ordering information for configured amplifier modules or stations. This section contains ordering information for required and optional accessories that are not included as part of a configured amplifier module or station. Consult your account representative or customer service representative for ordering assistance.

The **required accessories** listed in Table 7 must be ordered separately (they are not included via the GainMaker Ordering Matrix).

Table 7. Required Accessories

Required Accessories	Part Number
Plug-in pads (attenuators): Available in 0.5 dB steps from 0 to 20.5 dB <ul style="list-style-type: none"> • 1 required for forward input • 1 required for AGC, if applicable* • 4 required for reverse (3 input, 1 output) <small>* To determine AGC pad value, subtract 34 dB from the design value main port RF output level at the AGC pilot frequency.</small>	589693 (0 dB) sequentially through 589734 (20.5 dB)
Plug-in forward cable equalizer: Available in 1.5 dB steps from 0 to 30 dB at 1002 MHz <ul style="list-style-type: none"> • 1 required for forward input 	4007228 (0 dB) sequentially through 4007248 (30 dB)
Plug-in reverse cable equalizer: Available in 1 dB steps from 0 to 12 dB at 40 MHz <ul style="list-style-type: none"> • 1 required for reverse output, unless design value is 0 dB (0 dB EQ is provided) 	712719 (0 dB) and 4036769 (1 dB) sequentially through 4036780 (12 dB)
Plug-in signal director for auxiliary output: 1 required; choose from the following: <ul style="list-style-type: none"> • Jumper • 2-way Splitter • DC-8 Directional Coupler • DC-12 Directional Coupler 	4008208 4008364 4008365 4008366

The following **optional accessories** listed in Table 8 may be ordered separately:

Table 8. Optional Accessories

Optional Accessories	Part Number
24V Power Supply for GainMaker High Output HGD	4026157
230V AC Crowbar Surge Protector (plug-in, one per station)	715973
Plug-in Inverse Equalizer. Simulates cable equivalent tilts (creates tilt opposite that of equalizers). Use in place of forward input EQ as needed to maintain proper output tilt in short spaced locations. Available in approximately 1.6 dB "cable equivalent" steps from 1.6 to 16.2 dB.	4007486 (1.6 dB) sequentially through 4007495 (16.2 dB)
Long Reach Test Point Adapter	562580
Status Monitoring Transponder: See GainMaker Status Monitoring Transponder data sheet.	*

The **housing options** listed in Table 9 may be included with the product if ordered using the GainMaker Ordering Matrix. They may also be ordered separately.

Table 9. Housing Options

GainMaker System Amplifier Housing: One required housing includes housing base, lid, wiring harness, and 24V power supply # 4022846. All housings have 15A capacity.	Part Number
• Uncoated 4-port housing without external test point access	4026387
• Chromate plated 4-port housing without external test point access	4026388
• Uncoated 4-port housing with external test point access	4026385
• Chromate plated 4-port housing with external test point access	4026386
GainMaker System Amplifier Housing Upgrade Kit: One required if upgrading an existing System Amplifier II, II+, or III housing to allow use of GainMaker System Amplifier modules. Includes a GainMaker System Amplifier housing lid, wiring harness, and 24V power supply # 4022846.	
• Uncoated 4-port housing lid without external test point access	4026389
• Painted 4-port housing lid without external test point access	4026390
• Uncoated 4-port housing lid with external test point access	4026391
• Painted 4-port housing lid with external test point access	4026392
Seizure Upgrade Kit: One required if upgrading an existing System Amplifier II or II+ housing base to allow use of GainMaker System Amplifier modules. Includes high-current (15A) rated seizure screws and anvils.	548775



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Recycling symbol: Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)