

RADIUS を使用した、Cisco IOS ルータと Cisco VPN Client 4.x for Windows 間の IPSec 設定

内容

[はじめに](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[背景理論](#)

[設定](#)

[ネットワーク図](#)

[コンフィギュレーション](#)

[RADIUS サーバの設定](#)

[AAAクライアント（ルータ）用のRADIUSサーバの設定](#)

[グループ認証および認可のためのRADIUSサーバの設定](#)

[ユーザ認証のための RADIUS サーバの設定](#)

[VPN Client 4.8 の設定](#)

[確認](#)

[トラブルシュート](#)

[トラブルシューティングのためのコマンド](#)

[デバッグ出力](#)

[ルータのログ](#)

[クライアントログ](#)

[関連情報](#)

はじめに

このドキュメントでは、グループの許可とユーザ認証に RADIUS を使用した Cisco IOS ルータと Cisco VPN Client 4.x の間の接続を設定する例を示します。Cisco IOS® ソフトウェア リリース 12.2(8)T 以降では、Cisco VPN Client 3.x からの接続がサポートされています。VPN Client 3.x および 4.x は Diffie Hellman (DH) のグループ 2 ポリシーを使用しています。isakmp policy # group 2 コマンドにより、VPN Client からの接続が可能になります。

 注:IPSec VPNアカウンティングが使用可能になりました。詳細と設定例は、『[IPSec VPN アカウンティング](#)』を参照してください。

前提条件

要件

この設定を行う前に、次の要件が満たされていることを確認します。

- IPSec 用に割り当てるためのアドレスのプール
- 事前共有キー「cisco123」を持つ「3000clients」というグループ
- RADIUSサーバでのグループ認可とユーザ認証

 注:RADIUSアカウンティングは現在サポートされていません。

使用するコンポーネント

このドキュメントの情報は、次のソフトウェアとハードウェアのバージョンに基づいています。

- Cisco IOSソフトウェアリリース12.2(8)Tが稼働する2611ルータ。
- Cisco Secure ACS for Windows (すべてのRADIUSサーバが動作します)。
- Cisco VPN Client for Windowsバージョン4.8 (任意のVPN Client 4.xが機能します)

このドキュメントの情報は、特定のラボ環境にあるデバイスに基づいて作成されました。このドキュメントで使用するすべてのデバイスは、クリアな（デフォルト）設定で作業を開始しています。対象のネットワークが実稼働中である場合には、どのようなコマンドについても、その潜在的な影響について確実に理解しておく必要があります。

次の出力は、ルータで show version コマンドを発行した結果です。

```
<#root>

vpn2611#

show version

Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-JK903S-M), Version 12.2(8)T,
 RELEASE SOFTWARE (fc2)
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Thu 14-Feb-02 16:50 by cc当地
Image text-base: 0x80008070, data-base: 0x81816184

ROM: System Bootstrap, Version 11.3(2)XA4, RELEASE SOFTWARE (fc1)

vpn2611 uptime is 1 hour, 15 minutes
System returned to ROM by reload
System image file is "flash:c2600-jk9o3s-mz.122-8.T"

cisco 2611 (MPC860) processor (revision 0x203)
  with 61440K/4096K bytes of memory.
Processor board ID JAD04370EEG (2285146560)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
SuperLAT software (copyright 1990 by Meridian Technology Corp).
TN3270 Emulation software.
2 Ethernet/IEEE 802.3 interface(s)
1 Serial network interface(s)
32K bytes of non-volatile configuration memory.
16384K bytes of processor board System flash (Read/Write)
```

背景理論


このドキュメントでは、RADIUSサーバによるWindows Internet Naming Service(WINS)やDomain Naming Service(DNS)の割り当てなどの認証と認可について説明します。RADIUSサーバによって認証を行い、ルータによってローカルに認可を行う場合は、『[RADIUSをユーザ認証に使用したCisco IOSルータとCisco VPN Client 4.x for Windows間のIPSecの設定](#)』を参照してください。

設定

このセクションでは、このドキュメントで説明する機能を設定するために必要な情報を提供しています。

ネットワーク図

このドキュメントでは、次のネットワーク セットアップを使用します。

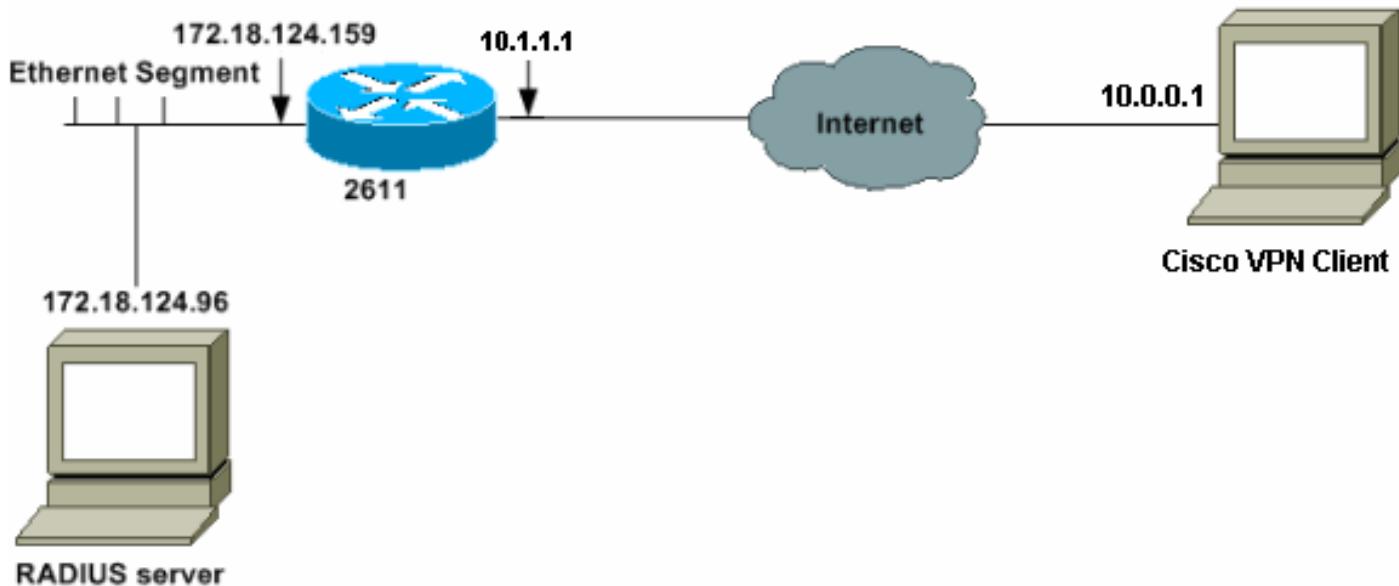

注：このサンプルネットワークのIPアドレスは、ラボネットワークのプライベートIPアドレスであるため、グローバルインターネットではルーティングできません。

コンフィギュレーション

2611 ルータ

<#root>

```
vpn2611#  
show run  
Building configuration...  
  
Current configuration : 1884 bytes  
!  
version 12.2  
service timestamps debug uptime  
service timestamps log uptime  
no service password-encryption  
!  
hostname vpn2611  
!  
  
!--- Enable AAA for user authentication and group authorization.  
  
aaa new-model  
!  
  
!--- In order to enable extended authentication (Xauth) for user authentication,  
!--- enable the  
aaa authentication  
commands.  
!--- "Group radius" specifies RADIUS user authentication.  
  
aaa authentication login userauthen group radius  
  
  
!--- In order to enable group authorization,  
!--- enable the  
aaa authorization  
commands.  
  
aaa authorization network groupauthor group radius  
  
!  
!  
ip subnet-zero  
!  
!  
ip audit notify log  
ip audit po max-events 100  
!  
  
!--- Create an Internet Security Association and  
!--- Key Management Protocol (ISAKMP) policy for Phase 1 negotiations.  
  
crypto isakmp policy 3  
encr 3des  
authentication pre-share  
group 2
```

!

!--- Create the Phase 2 policy for actual data encryption.

```
crypto ipsec transform-set myset esp-3des esp-sha-hmac
```

!

!--- Create a dynamic map and

!--- apply the transform set that was created.

```
crypto dynamic-map dynmap 10
set transform-set myset
```

!

!--- Create the actual crypto map,

!--- and apply the AAA lists that were created earlier.

```
crypto map clientmap client authentication list userauthen
crypto map clientmap isakmp authorization list groupauthor
crypto map clientmap client configuration address respond
crypto map clientmap 10 ipsec-isakmp dynamic dynmap
```

!

!

```
fax interface-type fax-mail
mta receive maximum-recipients 0
!
!
!
```

!--- Apply the crypto map on the outside interface.

```
interface Ethernet0/0
```

```
ip address 10.1.1.1 255.255.255.0
```

```
half-duplex
```

```
crypto map clientmap
```

!

```
interface Serial0/0
no ip address
shutdown
```

!

```
interface Ethernet0/1
ip address 172.18.124.159 255.255.255.0
no keepalive
half-duplex
```

!

!--- Create a pool of addresses to be assigned to the VPN Clients.

```
ip local pool ippool 10.16.20.1 10.16.20.200
```

```
ip classless
```

```

ip route 0.0.0.0 0.0.0.0 10.1.1.2
ip http server
ip pim bidir-enable
!

!--- Create an access control list (ACL) if you want to do split tunneling.
!--- This ACL is referenced in the RADIUS profile.

access-list 108 permit ip 172.18.124.0 0.0.255.255 10.16.20.0 0.0.0.255
!

!--- Specify the IP address of the RADIUS server,
!--- along with the RADIUS shared secret key.

radius-server host 172.18.124.96 auth-port 1645 acct-port 1646 key cisco123
radius-server retransmit 3
call rsvp-sync

!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
!
!
end

vpn2611#

```

RADIUS サーバの設定

AAAクライアント（ルータ）用のRADIUSサーバの設定

次のステップを実行します。

1. Add Entryをクリックして、ルータをRADIUSサーバデータベースに追加します。

AAA Client Hostname	AAA Client IP Address	Authenticate Using
340	172.18.124.151	RADIUS (Cisco Aironet)
Aironet-340-Lab	14.36.1.99	RADIUS (Cisco Aironet)
glenetest	172.18.124.120	RADIUS (Cisco IOS/PIX)
router	172.18.124.150	TACACS+ (Cisco IOS)

Add Entry

- [Network Device Groups](#)
- [Adding a Network Device Group](#)
- [Renaming a Network Device Group](#)
- [Deleting a Network Device Group](#)
- [AAA Clients](#)
- [Adding a AAA Client](#)
- [Editing a AAA Client](#)
- [Deleting a AAA Client](#)
- [AAA Servers](#)
- [Adding a AAA Server](#)
- [Editing a AAA Server](#)
- [Deleting a AAA Server](#)
- [Proxy Distribution Table](#)
- [Adding a Proxy Distribution Table Entry](#)
- [Sorting Proxy Distribution Table Entries](#)

2. ルータのIPアドレス「172.18.124.159」と共有秘密鍵「cisco123」を指定して、Authenticate UsingドロップダウンボックスでRADIUSを選択します。

Add AAA Client

AAA Client Hostname:

AAA Client IP Address:

Key:

Authenticate Using: RADIUS (Cisco IOS/P9)

Single Connect TACACS+ AAA Client (Record stop in accounting on failure).

Log Update/Watchdog Packets from this AAA Client

Log RADIUS Tunneling Packets from this AAA Client

Submit | Submit + Restart | Cancel

- [AAA Client Hostname](#)
- [AAA Client IP Address](#)
- [Key](#)
- [Network Device Group](#)
- [Authenticate Using](#)
- [Single Connect TACACS+ AAA Client](#)
- [Log Update/Watchdog Packets from this AAA Client](#)
- [Log RADIUS Tunneling Packets from this AAA Client](#)

AAA Client Hostname
The AAA Client Hostname is the name assigned to the AAA client.

[\[Back to Top\]](#)

AAA Client IP Address

グループ認証および認可のためのRADIUSサーバの設定

次のステップを実行します。

1. Add/Editをクリックして、3000clientという名前のユーザをRADIUSサーバに追加します。

User:

Find | Add/Edit

List users beginning with letter/number:
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
0 1 2 3 4 5 6 7 8 9

List All Users | Back to Help

- [User Setup and External User Databases](#)
- [Finding a Specific User in the CiscoSecure User Database](#)
- [Adding a User to the CiscoSecure User Database](#)
- [Listing Usernames that Begin with a Particular Character](#)
- [Listing All Usernames in the CiscoSecure User Database](#)
- [Changing a Username in the CiscoSecure User Database](#)

User Setup enables you to configure individual user information and delete users in the database.

User Setup and External User Databases

Before Cisco Secure ACS can authenticate users with an external database, you must have the database up and running on the external host. For example, if you are using token card authentication, you must have the token card database running and properly configured.

- You must have the database up and running on the external host. For example, if you are using token card authentication, you must have the token card database running and properly configured.
- You must have configured the applicable parameters in the Cisco Secure ACS configuration to point to the external database.

2. Cisco IOSソフトウェアリリース15.8.3およびCisco IOS XEソフトウェアリリース16.9.1より前では、このパスワードはCisco IOSの特別なキーワードであり、グループプロファイル

を参照する必要があることを示していました。必要に応じて、ユーザをCisco Secureグループにマッピングできます。No IP address assignmentが選択されていることを確認します。

Cisco IOSソフトウェアリリース15.8.3およびCisco IOS XEソフトウェアリリース16.9.1以降では、AAA認証にはパスワードが必要であり、これは必須です。`isakmp authorization list aaa_list1 password <secret>`コマンドを使用して、使用するパスワードを定義することを推奨します。

次に、管理者はRADIUSサーバで`<secret>`一致パスワードを設定します。

User Setup

User Setup

Password Authentication:

CiscoSecure Database

CiscoSecure PAP (Also used for CHAP/MS-CHAP/ARAP, if the Separate field is not checked.)

Separate (CHAP/MS-CHAP/ARAP)

When using a Token Card server for authentication, supplying a separate CHAP password for a token card user allows CHAP authentication. This is especially useful when token caching is enabled.

Group to which the user is assigned:

Group 20

Callback

Use group setting
 No callback allowed
 Callback using this number
 Dialup client specifies callback number
 Use Microsoft NT callback settings

Client IP Address Assignment

Use group settings
 No IP address assignment
 Assigned by dialup client
 Assign static IP address
 Assigned by AAA client pool

Submit **Delete** **Cancel**

3. このユーザーアカウントからVPN Clientに返されるグループ認可パラメータを指定します。

cisco-av-pairが次の属性で有効になっていることを確認します。

- ipsec : キー交換=ike
- ipsec : キー交換=事前共有キー

- ipsec:addr-pool=ippool
- ipsec:inacl=108 (ルータでスプリットトンネリングを使用する場合のみ必要)

また、次のIETF RADIUSアトリビュートが有効になっていることを確認します。

- 属性6: Service-Type=Outbound
- 属性64: Tunnel-Type=IP ESP
- 属性69: Tunnel-Password=cisco123 (これはVPN Clientのグループパスワードです)

完了したら、Submit をクリックします。

Checking this option will PERMIT all UNKNOWN Services

Default (Undefined) Services

Cisco IOS/PIX RADIUS Attributes

[009\001] cisco-av-pair

```
ipsec:key-exchange=ike
ipsec:key-exchange=preshared-key
ipsec:addr-pool=ippool
ipsec:inacl=10d
```

IETF RADIUS Attributes

[006] Service-Type

Outbound

[007] Framed-Protocol

PPP

[027] Session-Timeout

0

[028] Idle-Timeout

0

[064] Tunnel-Type

Tag 1 Value IP ESP

Tag 2 Value

[069] Tunnel-Password

Tag 1 Value cisco123

Tag 2 Value

Submit | Delete | Cancel

ベンダー固有属性では、次のオプション属性も有効にできます。


- ipsec : デフォルトドメイン=
- ipsec : タイムアウト=
- ipsec : アイドル時間=
- ipsec:dnsサーバー/=
- ipsec:winsサーバー/=

ユーザ認証のための RADIUS サーバの設定

次のステップを実行します。

1. Add/Editをクリックして、Cisco SecureデータベースにVPNユーザを追加します。

この例でのユーザ名は cisco です。

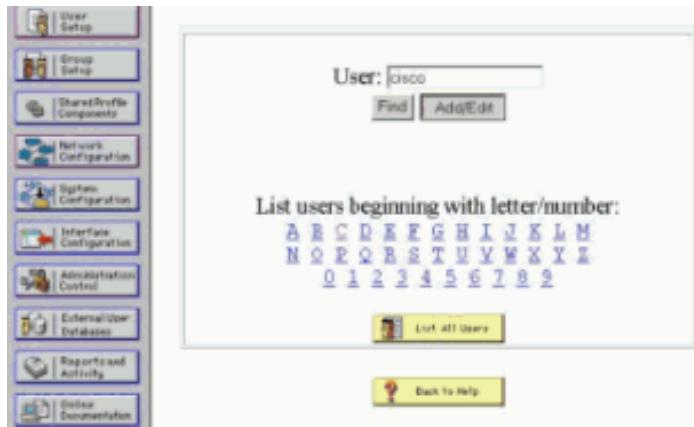

- [User Setup and External User Databases](#)
- [Finding a Specific User in the CiscoSecure User Database](#)
- [Adding a User to the CiscoSecure User Database](#)
- [Listing Usernames that Begin with a Particular Character](#)
- [Listing All Usernames in the CiscoSecure User Database](#)
- [Changing a Username in the CiscoSecure User Database](#)

User Setup enables you to configure individual user information, add users, and delete users in the database.

2. 次のウィンドウで、ユーザ cisco のパスワードを指定します。パスワードもciscoです。

ユーザ アカウントをグループにマッピングできます。完了したら、Submit をクリックします。

The screenshot shows two stacked configuration windows. The top window is 'Supplementary User Info' with fields for 'Real Name' and 'Description'. The bottom window is 'User Setup' with sections for 'Password Authentication' (CiscoSecure PAP), 'Separate (CHAP/MS-CHAP/ARAP)', and 'Group to which the user is assigned' (Group 19). It includes 'Password', 'Confirm', and 'Password' fields for each authentication method, and a note about token card authentication.

- [Account Disabled](#)
- [Deleting a Username](#)
- [Supplementary User Info](#)
- [Password Authentication](#)
- [Group to which the user is assigned](#)
- [Callback](#)
- [Client IP Address Assignment](#)
- [Advanced Settings](#)
- [Network Access Restrictions](#)
- [Max Sessions](#)
- [Usage Quotas](#)
- [Account Disable](#)
- [Downloadable ACLs](#)
- [Advanced TACACS+ Settings](#)
- [TACACS+ Enable Control](#)
- [TACACS+ Enable Password](#)
- [TACACS+ Outbound Password](#)
- [TACACS+ Shell Command Authorization](#)
- [TACACS+ Unknown Services](#)
- [IETF RADIUS Attributes](#)
- [RADIUS Vendor-Specific Attributes](#)

Account Disabled Status


Select the Account Disabled check box to disable this account; clear the check box to enable the account.

[Back to Top]


VPN Client 4.8 の設定

VPN Client 4.8 を設定するには、次の手順を実行します。


1. [Start] > [Programs] > [Cisco Systems VPN Client] > [VPN Client] の順に選択します。
2. [New] をクリックして、[Create New VPN Connection Entry] ウィンドウを開きます。

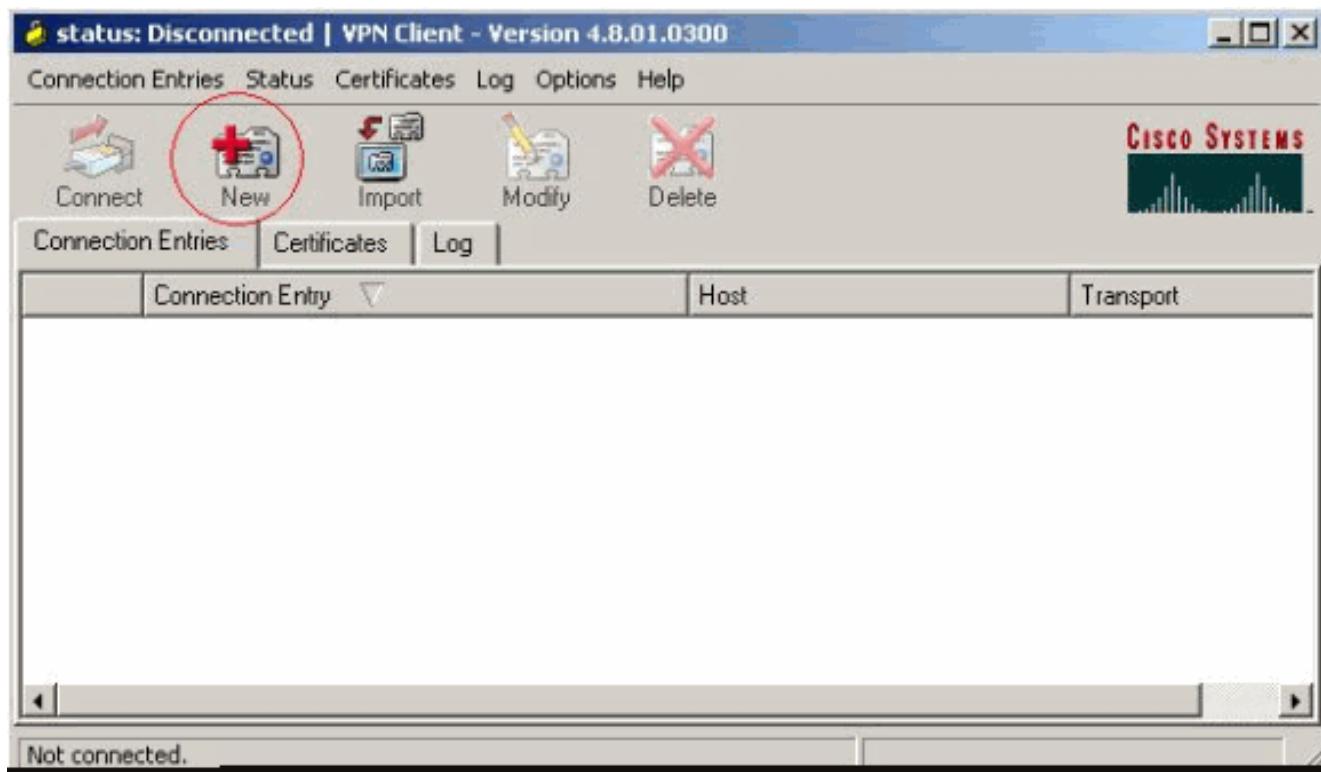


3. 接続エントリの名前と説明を入力します。Host ボックスに、ルータの Outside の IP アドレスを入力します。次に、VPNグループの名前とパスワードを入力して、Saveをクリックします。

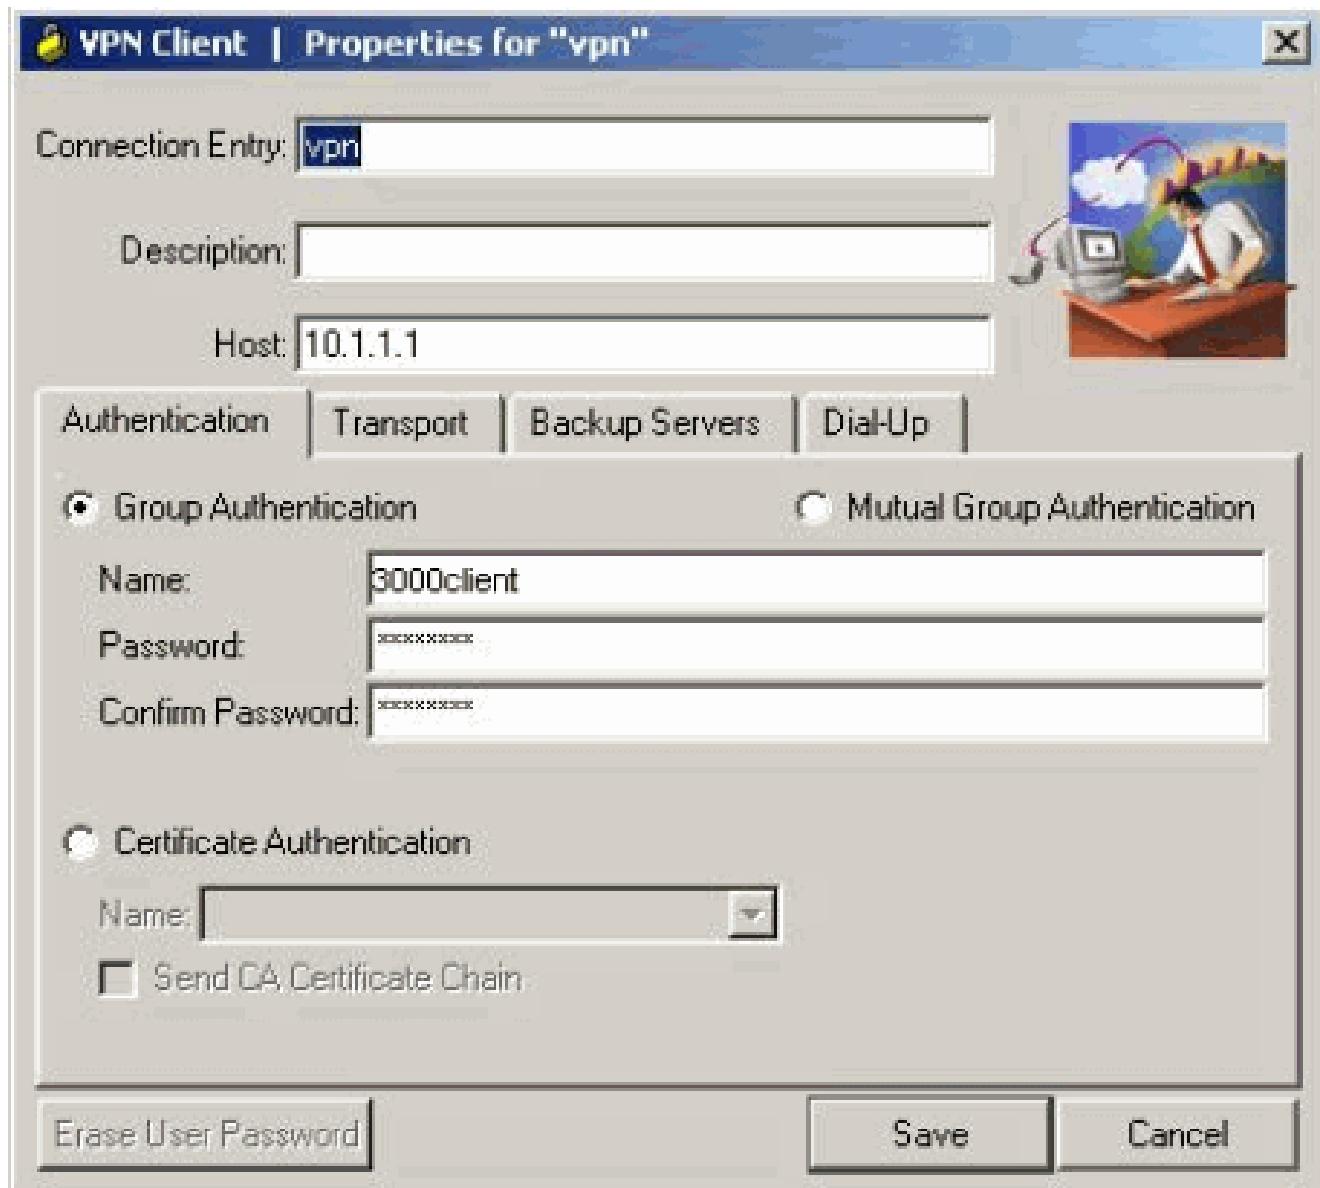


4. 使用する接続をクリックし、VPN クライアントのメイン ウィンドウにある [Connect] をクリックします。

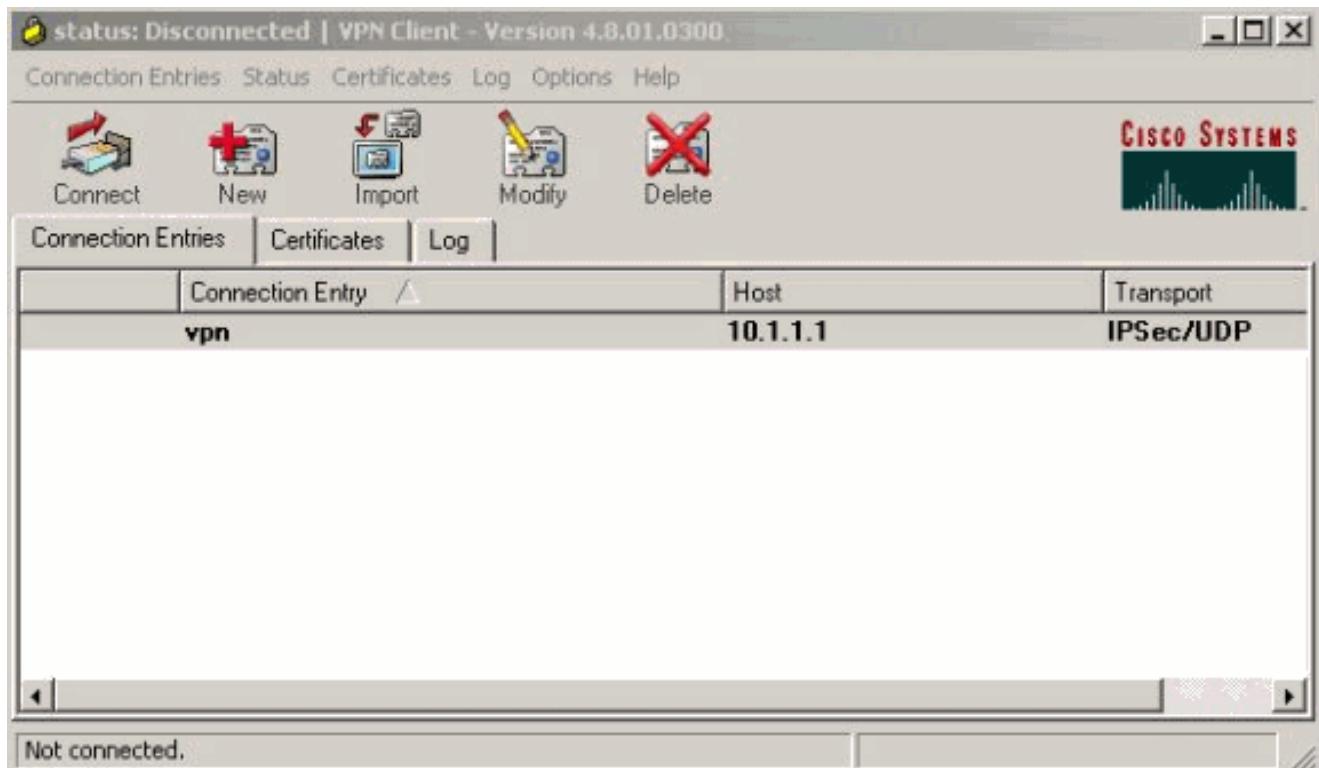

5. ダイアログボックスが表示されたら、Xauth のユーザ名とパスワード情報を入力して [OK] をクリックし、リモート ネットワークに接続します。

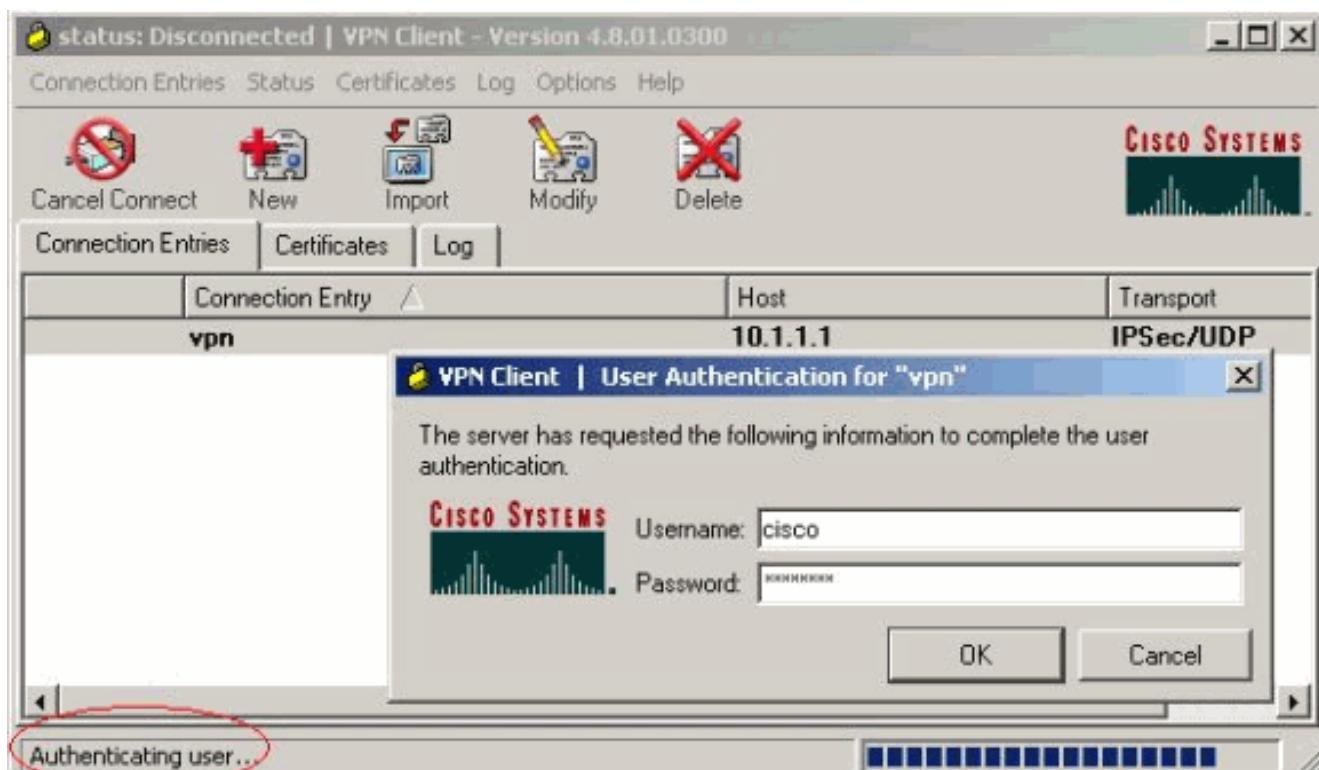

VPN Client が中央サイトのルータに接続されます。

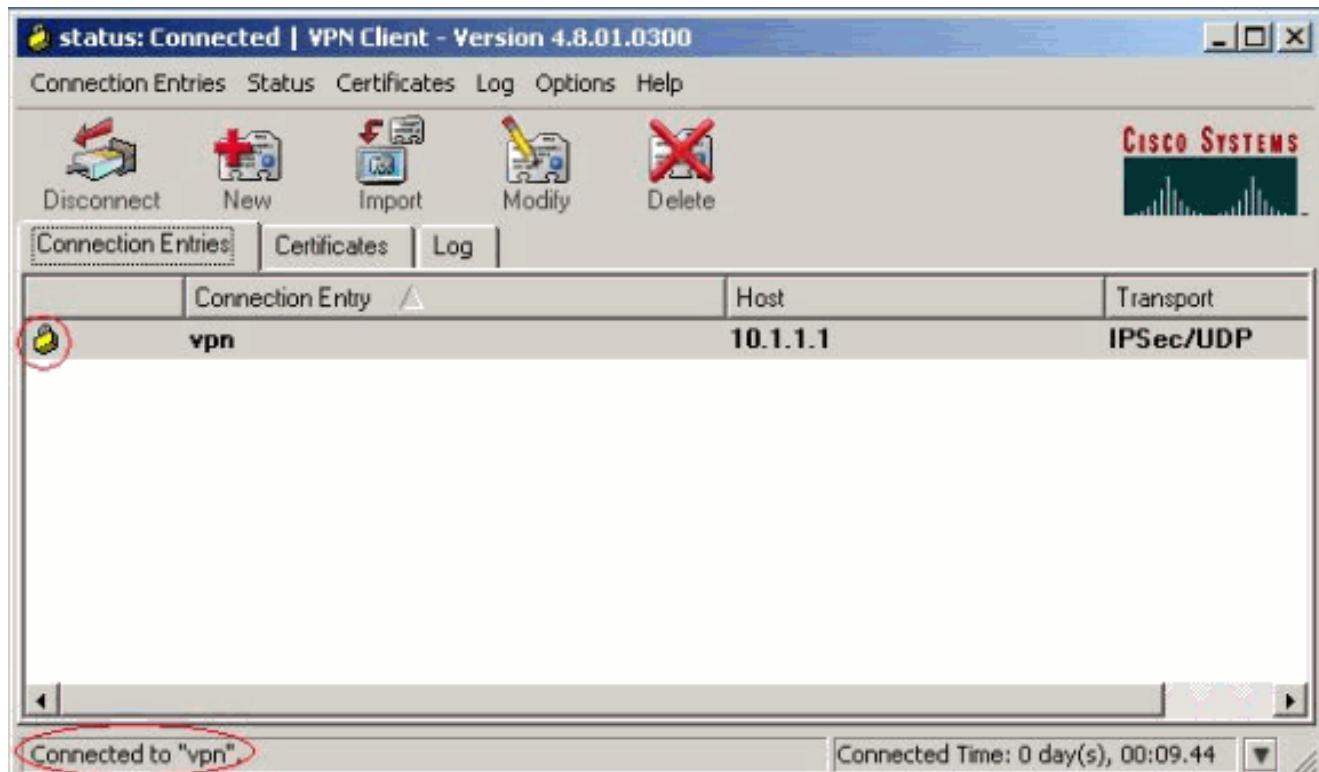

確認

このセクションでは、設定が正常に動作していることを確認します。

```
<#root>
vpn2611#
show crypto isakmp sa
dst          src          state        conn-id      slot
10.1.1.1  10.0.0.1
QM_IDLE
            3          0

vpn2611#
show crypto ipsec sa interface: Ethernet0/0
Crypto map tag: clientmap,
local addr. 10.1.1.1

local ident (addr/mask/prot/port): (10.1.1.1/255.255.255.255/0/0)
remote ident (addr/mask/prot/port): (10.16.20.2/255.255.255.255/0/0)

current_peer: 10.0.0.1
PERMIT, flags={}
#pkts encaps: 5, #pkts encrypt: 5, #pkts digest 5
```

```
#pkts decaps: 5, #pkts decrypt: 5, #pkts verify 5
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0

local crypto endpt.: 10.1.1.1, remote crypto endpt.: 10.0.0.1
path mtu 1500, media mtu 1500
current outbound spi: 77AFCCFA

inbound esp sas:
spi: 0xC7AC22AB(3349947051)
    transform: esp-3des esp-sha-hmac ,
    in use settings ={Tunnel, }
    slot: 0, conn id: 2000, flow_id: 1, crypto map: clientmap
    sa timing: remaining key lifetime (k/sec): (4608000/3444)
    IV size: 8 bytes
    replay detection support: Y

inbound ah sas:

inbound pcp sas:

outbound esp sas:
spi: 0x77AFCCFA(2008009978)
    transform: esp-3des esp-sha-hmac ,
    in use settings ={Tunnel, }
    slot: 0, conn id: 2001, flow_id: 2, crypto map: clientmap
    sa timing: remaining key lifetime (k/sec): (4608000/3444)
    IV size: 8 bytes
    replay detection support: Y

outbound ah sas:

outbound pcp sas:

local ident (addr/mask/prot/port): (172.18.124.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.16.20.2/255.255.255.255/0/0)

current_peer: 10.0.0.1

PERMIT, flags={}

#pkts encaps: 4, #pkts encrypt: 4, #pkts digest 4
#pkts decaps: 6, #pkts decrypt: 6, #pkts verify 6

#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0

local crypto endpt.: 10.1.1.1, remote crypto endpt.: 10.0.0.1
path mtu 1500, media mtu 1500
current outbound spi: 2EE5BF09

inbound esp sas:
spi: 0x3565451F(895829279)
    transform: esp-3des esp-sha-hmac ,
    in use settings ={Tunnel, }
    slot: 0, conn id: 2002, flow_id: 3, crypto map: clientmap
    sa timing: remaining key lifetime (k/sec): (4607999/3469)
    IV size: 8 bytes
    replay detection support: Y
```

```

inbound ah sas:

inbound pcp sas:

outbound esp sas:
  spi: 0x2EE5BF09(786808585)
    transform: esp-3des esp-sha-hmac ,
    in use settings ={Tunnel, }
    slot: 0, conn id: 2003, flow_id: 4, crypto map: clientmap
    sa timing: remaining key lifetime (k/sec): (4607999/3469)
    IV size: 8 bytes
    replay detection support: Y

outbound ah sas:

outbound pcp sas:

```

vpn2611#

```
show crypto engine connections active
```

ID	Interface	IP-Address	State	Algorithm	Encrypt	Decrypt
3	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	0
2000	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	5
2001	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	5	0
2002	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	6
2003	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	4	0

トラブルシュート

ここでは、設定に関するトラブルシューティングについて説明します。

トラブルシューティングのためのコマンド

[debug](#) コマンドを使用する前に、『debug コマンドの重要な情報』を参照してください。

- debug crypto ipsec : IPsec 接続に関するデバッグ情報を表示します。
- debug crypto isakmp:IPSec接続に関するデバッグ情報を表示し、両端で互換性がないために拒否された最初の属性セットを表示します。
- debug crypto engine : 暗号化エンジンからの情報を表示します。
- debug aaa authentication : AAA/TACACS+ 認証に関する情報を表示します。
- debug aaa authorization raduis : AAA/TACACS+ 認証に関する情報を表示します。
- debug radius : RADIUS サーバとルータの間のトラブルシューティング通信に関する情報を表示します。

デバッグ出力

このセクションでは、設定のトラブルシューティングに役立つルータのデバッグ情報を説明しています。

ルータのログ

```
<#root>

vpn2611#
show debug

General OS:

AAA Authorization debugging is on
Radius protocol debugging is on
Radius packet protocol debugging is on

Cryptographic Subsystem:
Crypto ISAKMP debugging is on
Crypto IPSEC debugging is on

vpn2611#

1w0d: ISAKMP (0:0): received packet from 10.0.0.1 (N) NEW SA

1w0d: ISAKMP: local port 500, remote port 500
1w0d: ISAKMP (0:2): (Re)Setting client xauth list userauthen and state
1w0d: ISAKMP: Locking CONFIG struct 0x830BF118 from
crypto_ikmp_config_initialize_sa, count 2
1w0d: ISAKMP (0:2): processing SA payload. message ID = 0
1w0d: ISAKMP (0:2): processing ID payload. message ID = 0
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: ISAKMP (0:2): vendor ID seems Unity/DPD but bad major
1w0d: ISAKMP (0:2): vendor ID is XAUTH
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: ISAKMP (0:2): vendor ID is DPD
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: ISAKMP (0:2): vendor ID is Unity
1w0d: ISAKMP (0:2): Checking ISAKMP transform 1 against priority 3 policy
1w0d: ISAKMP: encryption 3DES-CBC
1w0d: ISAKMP: hash SHA
1w0d: ISAKMP: default group 2
1w0d: ISAKMP: auth XAUTHInitPreShared
1w0d: ISAKMP: life type in seconds
1w0d: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B

1w0d: ISAKMP (0:2): atts are acceptable. Next payload is 3

1w0d: ISAKMP (0:2): processing KE payload. message ID = 0
1w0d: ISAKMP (0:2): processing NONCE payload. message ID = 0
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: ISAKMP (0:2): processing vendor id payload
1w0d: AAA: parse name=ISAKMP-ID-AUTH idb type=-1 tty=-1
1w0d: AAA/MEMORY: create_user (0x830CAF28) user='3000client' ruser='NULL'
ds0=0 port='ISAKMP-ID-AUTH' rem_addr='10.0.0.1' authen_type=NONE
service=LOGIN priv=0 initial_task_id='0'
1w0d: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_AM_EXCH
Old State = IKE_READY New State = IKE_R_AM_AAA_AWAIT

1w0d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(66832552):
Port='ISAKMP-ID-AUTH' list='groupauthor' service=NET
1w0d: AAA/AUTHOR/CRYPTO AAA: ISAKMP-ID-AUTH(66832552) user='3000client'
1w0d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(66832552): send AV service=ike
```

```
1w0d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(66832552): send AV
protocol=ipsec

1w0d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(66832552): found list
"groupauthor"
1w0d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(66832552): Method=radius

(radius)
1w0d: RADIUS: authenticating to get author data
1w0d: RADIUS: ustruct sharecount=3
1w0d: Radius: radius_port_info() success=0 radius_nas_port=1

1w0d: RADIUS: Send to ISAKMP-ID-AUTH id 60 172.18.124.96:1645,
Access-Request, len 83

1w0d: RADIUS: authenticator AF EC D3 AD D6 39 4F 7D - A0 5E FC 64 F5 DE
A7 3B
1w0d: RADIUS: NAS-IP-Address [4] 6 172.18.124.159
1w0d: RADIUS: NAS-Port-Type [61] 6 Async [0]

1w0d: RADIUS: User-Name [1] 12 "3000client"

1w0d: RADIUS: Calling-Station-Id [31] 15 "10.0.0.1"
1w0d: RADIUS: User-Password [2] 18 *
1w0d: RADIUS: Service-Type [6] 6 Outbound [5]

1w0d: RADIUS: Received from id 60 172.18.124.96:1645, Access-Accept, len
176

1w0d: RADIUS: authenticator 52 BA 0A 38 AC C2 2B 6F - A0 77 64 93 D6 19
78 CF
1w0d: RADIUS: Service-Type [6] 6 Outbound [5]
1w0d: RADIUS: Vendor, Cisco [26] 30
1w0d: RADIUS: Cisco AVpair [1] 24 "ipsec:key-exchange=ike"
1w0d: RADIUS: Vendor, Cisco [26] 40
1w0d: RADIUS: Cisco AVpair [1] 34 "ipsec:key-exchange=preshared-key"
1w0d: RADIUS: Vendor, Cisco [26] 30
1w0d: RADIUS: Cisco AVpair [1] 24 "ipsec:addr-pool=ippool"
1w0d: RADIUS: Vendor, Cisco [26] 23
1w0d: RADIUS: Cisco AVpair [1] 17 "ipsec:inacl=108"
1w0d: RADIUS: Tunnel-Type [64] 6 01:ESP [9]
1w0d: RADIUS: Tunnel-Password [69] 21 *
1w0d: RADIUS: saved authorization data for user 830CAF28 at 83198648

1w0d: RADIUS: cisco AVPair "ipsec:key-exchange=ike"
1w0d: RADIUS: cisco AVPair "ipsec:key-exchange=preshared-key"
1w0d: RADIUS: cisco AVPair "ipsec:addr-pool=ippool"
1w0d: RADIUS: cisco AVPair "ipsec:inacl=108"
1w0d: RADIUS: Tunnel-Type, [01] 00 00 09
1w0d: RADIUS: TAS(1) created and enqueued.
1w0d: RADIUS: Tunnel-Password decrypted, [01] cisco123

1w0d: RADIUS: TAS(1) takes precedence over tagged attributes,
tunnel_type=esp
1w0d: RADIUS: free TAS(1)
1w0d: AAA/AUTHOR (66832552): Post authorization status = PASS_REPLACE
1w0d: ISAKMP: got callback 1
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
AAA/AUTHOR/IKE: Processing AV key-exchange=preshared-key
AAA/AUTHOR/IKE: Processing AV addr-pool=ippool
AAA/AUTHOR/IKE: Processing AV inacl=108
AAA/AUTHOR/IKE: Processing AV tunnel-type*esp
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
AAA/AUTHOR/IKE: Processing AV tunnel-tag*1
1w0d: ISAKMP (0:2): SKEYID state generated
```

```
1w0d: ISAKMP (0:2): SA is doing pre-shared key authentication plus XAUTH
using id type ID_IPV4_ADDR
1w0d: ISAKMP (2): ID payload
next-payload : 10
type : 1
protocol : 17
port : 500
length : 8
1w0d: ISAKMP (2): Total payload length: 12
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) AG_INIT_EXCH
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, PRESHARED_KEY_REPLY
Old State = IKE_R_AM_AAA_AWAIT New State = IKE_R_AM2

1w0d: AAA/MEMORY: free_user (0x830CAF28) user='3000client' ruser='NULL'
port='ISAKMP-ID-AUTH' rem_addr='10.0.0.1' authen_type=NONE
service=LOGIN priv=0
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) AG_INIT_EXCH
1w0d: ISAKMP (0:2): processing HASH payload. message ID = 0
1w0d: ISAKMP (0:2): processing NOTIFY INITIAL_CONTACT protocol 1
spi 0, message ID = 0, sa = 831938B0
1w0d: ISAKMP (0:2): Process initial contact, bring down existing phase 1
and 2 SA's
1w0d: ISAKMP (0:2): returning IP addr to the address pool: 10.16.20.1
1w0d: ISAKMP (0:2): returning address 10.16.20.1 to pool
1w0d: ISAKMP (0:2): peer does not do paranoid keepalives.

1w0d: ISAKMP (0:2): SA has been authenticated with 10.0.0.1
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): purging node -1377537628
1w0d: ISAKMP: Sending phase 1 responder lifetime 86400

1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
Old State = IKE_R_AM2 New State = IKE_P1_COMPLETE

1w0d: IPSEC(key_engine): got a queue event...
1w0d: IPSEC(key_engine_delete_sas): rec'd delete notify from ISAKMP
1w0d: IPSEC(key_engine_delete_sas): delete all SAs shared with
10.0.0.1
1w0d: ISAKMP (0:2): Need XAUTH
1w0d: AAA: parse name=ISAKMP idb type=-1 tty=-1
1w0d: AAA/MEMORY: create_user (0x830CAF28) user='NULL' ruser='NULL' ds0=0
port='ISAKMP' rem_addr='10.0.0.1' authen_type=ASCII service=LOGIN
priv=0 initial_task_id='0'
1w0d: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE
Old State = IKE_P1_COMPLETE New State = IKE_XAUTH_AAA_START_LOGIN_AWAIT

1w0d: ISAKMP: got callback 1
1w0d: ISAKMP/xauth: request attribute XAUTH_TYPE_V2
1w0d: ISAKMP/xauth: request attribute XAUTH_MESSAGE_V2
1w0d: ISAKMP/xauth: request attribute XAUTH_USER_NAME_V2
1w0d: ISAKMP/xauth: request attribute XAUTH_USER_PASSWORD_V2
1w0d: ISAKMP (0:2): initiating peer config to 10.0.0.1. ID =
-1021889193
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) CONF_XAUTH
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, IKE_AAA_START_LOGIN
Old State = IKE_XAUTH_AAA_START_LOGIN_AWAIT New State =
IKE_XAUTH_REQ_SENT

1w0d: ISAKMP (0:1): purging node 832238598
1w0d: ISAKMP (0:1): purging node 1913225491
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) CONF_XAUTH
1w0d: ISAKMP (0:2): processing transaction payload from 10.0.0.1.
```

```
message ID = -1021889193
1w0d: ISAKMP: Config payload REPLY
1w0d: ISAKMP/xauth: reply attribute XAUTH_TYPE_V2 unexpected
1w0d: ISAKMP/xauth: reply attribute XAUTH_USER_NAME_V2
1w0d: ISAKMP/xauth: reply attribute XAUTH_USER_PASSWORD_V2
1w0d: ISAKMP (0:2): deleting node -1021889193 error FALSE reason "done
with xauth request/reply exchange"
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_CFG_REPLY
Old State = IKE_XAUTH_REQ_SENT New State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT

1w0d: RADIUS: ustruct sharecount=2
1w0d: Radius: radius_port_info() success=0 radius_nas_port=1

1w0d: RADIUS: Send to ISAKMP id 61 172.18.124.96:1645, Access-Request, len 72
1w0d: RADIUS: authenticator 98 12 4F C0 DA B9 48 B8 - 58 00 BA 14 08 8E
87 C0
1w0d: RADIUS: NAS-IP-Address [4] 6 172.18.124.159
1w0d: RADIUS: NAS-Port-Type [61] 6 Async [0]

1w0d: RADIUS: User-Name [1] 7 "cisco"
1w0d: RADIUS: Calling-Station-Id [31] 15 "10.0.0.1"
1w0d: RADIUS: User-Password [2] 18 *

1w0d: RADIUS: Received from id 61 172.18.124.96:1645, Access-Accept, len 26
1w0d: RADIUS: authenticator 00 03 F4 E1 9C 61 3F 03 - 54 83 E8 27 5C 6A
7B 6E
1w0d: RADIUS: Framed-IP-Address [8] 6 255.255.255.255
1w0d: RADIUS: saved authorization data for user 830CAF28 at 830F89F8
1w0d: ISAKMP: got callback 1
1w0d: ISAKMP (0:2): initiating peer config to 10.0.0.1. ID =
-547189328
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) CONF_XAUTH
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, IKE_AAA_CONT_LOGIN
Old State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT New State = IKE_XAUTH_SET_SENT

1w0d: AAA/MEMORY: free_user (0x830CAF28) user='cisco' ruser='NULL'
port='ISAKMP' rem_addr='10.0.0.1' authen_type=ASCII service=LOGIN
priv=0
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) CONF_XAUTH
1w0d: ISAKMP (0:2): processing transaction payload from 10.0.0.1.
message ID = -547189328
1w0d: ISAKMP: Config payload ACK
1w0d: ISAKMP (0:2): XAUTH ACK Processed
1w0d: ISAKMP (0:2): deleting node -547189328 error FALSE reason "done with
transaction"
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_CFG_ACK
Old State = IKE_XAUTH_SET_SENT New State = IKE_P1_COMPLETE

1w0d: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): processing transaction payload from 10.0.0.1.
message ID = -1911189201
1w0d: ISAKMP: Config payload REQUEST
1w0d: ISAKMP (0:2): checking request:
1w0d: ISAKMP: IP4_ADDRESS
1w0d: ISAKMP: IP4_NETMASK
1w0d: ISAKMP: IP4_DNS
1w0d: ISAKMP: IP4_NBNS
1w0d: ISAKMP: ADDRESS_EXPIRY
```

```
1w0d: ISAKMP: APPLICATION_VERSION
1w0d: ISAKMP: UNKNOWN Unknown Attr: 0x7000
1w0d: ISAKMP: UNKNOWN Unknown Attr: 0x7001
1w0d: ISAKMP: DEFAULT_DOMAIN
1w0d: ISAKMP: SPLIT_INCLUDE
1w0d: ISAKMP: UNKNOWN Unknown Attr: 0x7007
1w0d: ISAKMP: UNKNOWN Unknown Attr: 0x7008
1w0d: ISAKMP: UNKNOWN Unknown Attr: 0x7005
1w0d: AAA: parse name=ISAKMP-GROUP-AUTH idb type=-1 tty=-1
1w0d: AAA/MEMORY: create_user (0x830CAF28) user='3000client' ruser='NULL'
ds0=0 port='ISAKMP-GROUP-AUTH' rem_addr='10.0.0.1' authen_type=None
service=LOGIN priv=0 initial_task_id='0'
1w0d: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_CFG_REQUEST
Old State = IKE_P1_COMPLETE New State = IKE_CONFIG_AUTHOR_AAA_AWAIT

1w0d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3098118746):
Port='ISAKMP-GROUP-AUTH' list='groupauthor' service=NET
1w0d: AAA/AUTHOR/CRYPTO AAA: ISAKMP-GROUP-AUTH(3098118746)
user='3000client'
1w0d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3098118746): send AV
service=ike
1w0d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3098118746): send AV
protocol=ipsec
1w0d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3098118746): found list
"groupauthor"
1w0d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3098118746): Method=radius
(radius)
1w0d: RADIUS: authenticating to get author data
1w0d: RADIUS: ustruct sharecount=3
1w0d: Radius: radius_port_info() success=0 radius_nas_port=1
1w0d: RADIUS: Send to ISAKMP-GROUP-AUTH id 62 172.18.124.96:1645,
Access-Request, len 83
1w0d: RADIUS: authenticator 32 C5 32 FF AB B7 E4 68 - 9A 68 5A DE D5 56
0C BE
1w0d: RADIUS: NAS-IP-Address [4] 6 172.18.124.159
1w0d: RADIUS: NAS-Port-Type [61] 6 Async [0]
1w0d: RADIUS: User-Name [1] 12 "3000client"
1w0d: RADIUS: Calling-Station-Id [31] 15 "10.0.0.1"
1w0d: RADIUS: User-Password [2] 18 *
1w0d: RADIUS: Service-Type [6] 6 Outbound [5]
1w0d: RADIUS: Received from id 62 172.18.124.96:1645, Access-Accept, len
176
1w0d: RADIUS: authenticator DF FA FE 21 07 92 4F 10 - 75 5E D6 96 66 70
19 27
1w0d: RADIUS: Service-Type [6] 6 Outbound [5]
1w0d: RADIUS: Vendor, Cisco [26] 30
1w0d: RADIUS: Cisco AVpair [1] 24 "ipsec:key-exchange=ike"
1w0d: RADIUS: Vendor, Cisco [26] 40
1w0d: RADIUS: Cisco AVpair [1] 34
"ipsec:key-exchange=preshared-key"
1w0d: RADIUS: Vendor, Cisco [26] 30
1w0d: RADIUS: Cisco AVpair [1] 24 "ipsec:addr-pool=ippool"
1w0d: RADIUS: Vendor, Cisco [26] 23
1w0d: RADIUS: Cisco AVpair [1] 17 "ipsec:inacl=108"
1w0d: RADIUS: Tunnel-Type [64] 6 01:ESP [9]
1w0d: RADIUS: Tunnel-Password [69] 21 *
1w0d: RADIUS: saved authorization data for user 830CAF28 at 83143E64
1w0d: RADIUS: cisco AVPair "ipsec:key-exchange=ike"
1w0d: RADIUS: cisco AVPair "ipsec:key-exchange=preshared-key"
1w0d: RADIUS: cisco AVPair "ipsec:addr-pool=ippool"
1w0d: RADIUS: cisco AVPair "ipsec:inacl=108"
1w0d: RADIUS: Tunnel-Type, [01] 00 00 09
```

1w0d: RADIUS: TAS(1) created and enqueued.
1w0d: RADIUS: Tunnel-Password decrypted, [01] cisco123
1w0d: RADIUS: TAS(1) takes precedence over tagged attributes,
tunnel_type=esp
1w0d: RADIUS: free TAS(1)
1w0d: AAA/AUTHOR (3098118746): Post authorization status = PASS_REPLACE
1w0d: ISAKMP: got callback 1
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
AAA/AUTHOR/IKE: Processing AV key-exchange=preshared-key
AAA/AUTHOR/IKE: Processing AV addr-pool=ippool
AAA/AUTHOR/IKE: Processing AV inacl=108
AAA/AUTHOR/IKE: Processing AV tunnel-type*esp
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
AAA/AUTHOR/IKE: Processing AV tunnel-tag*1
1w0d: ISAKMP (0:2): attributes sent in message:
1w0d: Address: 0.2.0.0
1w0d: ISAKMP (0:2): allocating address 10.16.20.2
1w0d: ISAKMP: Sending private address: 10.16.20.2
1w0d: ISAKMP: Unknown Attr: IP4_NETMASK (0x2)
1w0d: ISAKMP: Sending ADDRESS_EXPIRY seconds left to use the address:
86395
1w0d: ISAKMP: Sending APPLICATION_VERSION string: Cisco Internetwork
Operating System Software
IOS (tm) C2600 Software (C2600-JK903S-M), Version 12.2(8)T, RELEASE
SOFTWARE (fc2)
TAC Support: <http://www.cisco.com/tac>
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Thu 14-Feb-02 16:50 by ccai
1w0d: ISAKMP: Unknown Attr: UNKNOWN (0x7000)
1w0d: ISAKMP: Unknown Attr: UNKNOWN (0x7001)
1w0d: ISAKMP: Sending split include name 108 network 14.38.0.0 mask
255.255.0.0 protocol 0, src port 0, dst port 0

1w0d: ISAKMP: Unknown Attr: UNKNOWN (0x7007)
1w0d: ISAKMP: Unknown Attr: UNKNOWN (0x7008)
1w0d: ISAKMP: Unknown Attr: UNKNOWN (0x7005)
1w0d: ISAKMP (0:2): responding to peer config from 10.0.0.1. ID =
-1911189201
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) CONF_ADDR
1w0d: ISAKMP (0:2): deleting node -1911189201 error FALSE reason ""
1w0d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, IKE_AAA_GROUP_ATTR
Old State = IKE_CONFIG_AUTHOR_AAA_AWAIT New State = IKE_P1_COMPLETE

1w0d: AAA/MEMORY: free_user (0x830CAF28) user='3000client' ruser='NULL'
port='ISAKMP-GROUP-AUTH' rem_addr='10.0.0.1' authen_type=None
service=LOGIN priv=0
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): processing HASH payload. message ID = 132557281
1w0d: ISAKMP (0:2): processing SA payload. message ID = 132557281
1w0d: ISAKMP (0:2): Checking IPSec proposal 1
1w0d: ISAKMP: transform 1, ESP_3DES
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: authenticator is HMAC-MD5
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
hmac_alg 1) not supported
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w0d: ISAKMP (0:2): skipping next ANDed proposal (1)
1w0d: ISAKMP (0:2): Checking IPSec proposal 2
1w0d: ISAKMP: transform 1, ESP_3DES

```
1w0d: ISAKMP: attributes in transform:  
1w0d: ISAKMP: authenticator is HMAC-SHA  
1w0d: ISAKMP: encaps is 1  
1w0d: ISAKMP: SA life type in seconds  
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B  
1w0d: ISAKMP (0:2): atts are acceptable.  
1w0d: ISAKMP (0:2): Checking IPsec proposal 2  
1w0d: ISAKMP (0:2): transform 1, IPPCP LZS  
1w0d: ISAKMP: attributes in transform:  
1w0d: ISAKMP: encaps is 1  
1w0d: ISAKMP: SA life type in seconds  
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B  
1w0d: IPSEC(validate_proposal): transform proposal (prot 4, trans 3,  
hmac_alg 0) not supported  
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0  
1w0d: ISAKMP (0:2): Checking IPsec proposal 3  
1w0d: ISAKMP: transform 1, ESP_3DES  
1w0d: ISAKMP: attributes in transform:  
1w0d: ISAKMP: authenticator is HMAC-MD5  
1w0d: ISAKMP: encaps is 1  
1w0d: ISAKMP: SA life type in seconds  
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B  
1w0d: IPSEC(validate_proposal): transform proposal (prot 3, trans 3,  
hmac_alg 1) not supported  
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0  
1w0d: ISAKMP (0:2): Checking IPsec proposal 4  
1w0d: ISAKMP: transform 1, ESP_3DES  
1w0d: ISAKMP: attributes in transform:  
1w0d: ISAKMP: authenticator is HMAC-SHA  
1w0d: ISAKMP: encaps is 1  
1w0d: ISAKMP: SA life type in seconds  
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B  
  
1w0d: ISAKMP (0:2): atts are acceptable.  
  
1w0d: IPSEC(validate_proposal_request): proposal part #1,  
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,  
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),  
remote_proxy= 10.16.20.2/255.255.255.255/0/0 (type=1),  
protocol= ESP, transform= esp-3des esp-sha-hmac ,  
lifedur= 0s and 0kb,  
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4  
1w0d: ISAKMP (0:2): processing NONCE payload. message ID = 132557281  
1w0d: ISAKMP (0:2): processing ID payload. message ID = 132557281  
1w0d: ISAKMP (0:2): processing ID payload. message ID = 132557281  
1w0d: ISAKMP (0:2): asking for 1 spis from ipsec  
1w0d: ISAKMP (0:2): Node 132557281, Input = IKE_MESG_FROM_PEER,  
IKE_QM_EXCH  
Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE  
  
1w0d: IPSEC(key_engine): got a queue event...  
1w0d: IPSEC(spi_response): getting spi 245824456 for SA  
from 10.1.1.1 to 10.0.0.1 for prot 3  
1w0d: ISAKMP: received ke message (2/1)  
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) QM_IDLE  
1w0d: ISAKMP (0:2): Node 132557281, Input = IKE_MESG_FROM_IPSEC,  
IKE_SPI_REPLY  
Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2  
  
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) QM_IDLE  
1w0d: ISAKMP (0:2): Creating IPsec SAs  
1w0d: inbound SA from 10.0.0.1 to 10.1.1.1
```

```
(proxy 10.16.20.2 to 10.1.1.1)
1w0d: has spi 0xEA6FBC8 and conn_id 2000 and flags 4
1w0d: lifetime of 2147483 seconds
1w0d: outbound SA from 10.1.1.1 to 10.0.0.1 (proxy
10.1.1.1 to 10.16.20.2 )
1w0d: has spi 1009463339 and conn_id 2001 and flags C
1w0d: lifetime of 2147483 seconds

1w0d: ISAKMP (0:2): deleting node 132557281 error FALSE reason "quick mode
done (await())"
1w0d: ISAKMP (0:2): Node 132557281, Input = IKE_MESG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

1w0d: IPSEC(key_engine): got a queue event...
1w0d: IPSEC(initialize_sas): ,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/0.0.0.0/0/0 (type=1),
remote_proxy= 10.16.20.2/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sha-hmac ,
lifedur= 2147483s and 0kb,
spi= 0xEA6FBC8(245824456), conn_id= 2000, keysize= 0, flags= 0x4
1w0d: IPSEC(initialize_sas): ,
(key eng. msg.) OUTBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/0.0.0.0/0/0 (type=1),
remote_proxy= 10.16.20.2/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sha-hmac ,
lifedur= 2147483s and 0kb,
spi= 0x3C2B302B(1009463339), conn_id= 2001, keysize= 0, flags= 0xC
1w0d: IPSEC(create_sa): sa created,
(sa) sa_dest= 10.1.1.1, sa_prot= 50,
sa_spi= 0xEA6FBC8(245824456),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2000
1w0d: IPSEC(create_sa): sa created,
(sa) sa_dest= 10.0.0.1, sa_prot= 50,
sa_spi= 0x3C2B302B(1009463339),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2001
1w0d: ISAKMP: received ke message (4/1)
1w0d: ISAKMP: Locking CONFIG struct 0x830BF118 for
crypto_ikmp_config_handle_kei_mess, count 3
1w0d: ISAKMP (0:1): purging SA., sa=83196748, delme=83196748
1w0d: ISAKMP: Unlocking CONFIG struct 0x830BF118 on return of attributes,
count 2
1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): processing HASH payload. message ID = -1273332908
1w0d: ISAKMP (0:2): processing SA payload. message ID = -1273332908
1w0d: ISAKMP (0:2): Checking IPsec proposal 1
1w0d: ISAKMP: transform 1, ESP_3DES
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: authenticator is HMAC-MD5
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
hmac_alg 1) not supported
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w0d: ISAKMP (0:2): skipping next ANDed proposal (1)
1w0d: ISAKMP (0:2): Checking IPsec proposal 2
1w0d: ISAKMP: transform 1, ESP_3DES
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: authenticator is HMAC-SHA
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
```

```
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: ISAKMP (0:2): atts are acceptable.
1w0d: ISAKMP (0:2): Checking IPSec proposal 2
1w0d: ISAKMP (0:2): transform 1, IPPCP Lzs
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: IPSEC(validate_proposal): transform proposal (prot 4, trans 3,
hmac_alg 0) not supported
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w0d: ISAKMP (0:2): Checking IPSec proposal 3
1w0d: ISAKMP: transform 1, ESP_3DES
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: authenticator is HMAC-MD5
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
hmac_alg 1) not supported
1w0d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w0d: ISAKMP (0:2): Checking IPSec proposal 4
1w0d: ISAKMP: transform 1, ESP_3DES
1w0d: ISAKMP: attributes in transform:
1w0d: ISAKMP: authenticator is HMAC-SHA
1w0d: ISAKMP: encaps is 1
1w0d: ISAKMP: SA life type in seconds
1w0d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w0d: ISAKMP (0:2): atts are acceptable.
1w0d: IPSEC(validate_proposal_request): proposal part #
vpn2611#1,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 14.38.0.0/255.255.0.0/0/0 (type=4),
remote_proxy= 10.16.20.2/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
1w0d: ISAKMP (0:2): processing NONCE payload. message ID = -1273332908
1w0d: ISAKMP (0:2): processing ID payload. message ID = -1273332908
1w0d: ISAKMP (0:2): processing ID payload. message ID = -1273332908
1w0d: ISAKMP (0:2): asking for 1 spis from ipsec
1w0d: ISAKMP (0:2): Node -1273332908, Input = IKE_MESG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE

1w0d: IPSEC(key_engine): got a queue event...
1w0d: IPSEC(spi_response): getting spi 593097454 for SA
from 10.1.1.1 to 10.0.0.1
vpn2611#
vpn2611#2 for prot 3
1w0d: ISAKMP: received ke message (2/1)
1w0d: ISAKMP (0:2): sending packet to 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): Node -1273332908, Input = IKE_MESG_FROM_IPSEC,
IKE_SPI_REPLY
Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2

1w0d: ISAKMP (0:2): received packet from 10.0.0.1 (R) QM_IDLE
1w0d: ISAKMP (0:2): Creating IPsec SAs
1w0d: inbound SA from 10.0.0.1 to 10.1.1.1
(proxy 10.16.20.2 to 14.38.0.0)
1w0d: has spi 0x2359F2EE and conn_id 2002 and flags 4
1w0d: lifetime of 2147483 seconds
```

```

1w0d: outbound SA from 10.1.1.1 to 10.0.0.1 (proxy
14.38.0.0 to 10.16.20.2 )
1w0d: has spi 1123818858 and conn_id 2003 and flags C
1w0d: lifetime of 2147483 seconds

1w0d: ISAKMP (0:2): deleting node -1273332908 erro
vpn2611#un ar FALSE reason "quick mode done (await())"
1w0d: ISAKMP (0:2): Node -1273332908, Input = IKE_MESG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

1w0d: IPSEC(key_engine): got a queue event...
1w0d: IPSEC(initialize_sas): ,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 172.18.124..0/255.255.255.0/0/0 (type=4),
remote_proxy= 10.16.20.2/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sha-hmac ,
lifedur= 2147483s and 0kb,
spi= 0x2359F2EE(593097454), conn_id= 2002, keysize= 0, flags= 0x4
1w0d: IPSEC(initialize_sas): ,
(key eng. msg.) OUTBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
remote_proxy= 10.16.20.2/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sh11
All possible debugging has been turned off
vpn2611#a-hmac ,
lifedur= 2147483s and 0kb,
spi= 0x42FC1D6A(1123818858), conn_id= 2003, keysize= 0, flags= 0xC
1w0d: IPSEC(create_sa): sa created,
(sa) sa_dest= 10.1.1.1, sa_prot= 50,
sa_spi= 0x2359F2EE(593097454),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2002
1w0d: IPSEC(create_sa): sa created,
(sa) sa_dest= 10.0.0.1, sa_prot= 50,
sa_spi= 0x42FC1D6A(1123818858),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2003

```

クライアント ログ

ログを表示するには、VPN Client で LogViewer を起動します。設定済みのクラスすべてに対してフィルタが High に設定されていることを確認してください。次に、サンプルのログ出力を示します。

```

1 16:48:10.203 03/05/02 Sev=Info/6 DIALER/0x63300002
Initiating connection.

2 16:48:10.203 03/05/02 Sev=Info/4 CM/0x63100002
Begin connection process

3 16:48:10.223 03/05/02 Sev=Info/4 CM/0x63100004
Establish secure connection using Ethernet

4 16:48:10.223 03/05/02 Sev=Info/4 CM/0x63100026
Attempt connection with server "10.1.1.1"

5 16:48:10.223 03/05/02 Sev=Info/6 IKE/0x6300003B

```

Attempting to establish a connection with 10.1.1.1.

6 16:48:10.273 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID) to 10.1.1.1

7 16:48:10.273 03/05/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

8 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

9 16:48:10.994 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK AG (SA, VID, VID, VID, VID, KE, ID, NON, HASH)
from 10.1.1.1

10 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

11 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000001
Peer is a Cisco-Unity compliant peer

12 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

13 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000001
Peer supports DPD

14 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 2D275A044215F48F531958AB2578EB2D

15 16:48:10.994 03/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 09002689DFD6B712

16 16:48:11.025 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT) to 10.1.1.1

17 16:48:11.045 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

18 16:48:11.045 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:STATUS_RESP_LIFETIME)
from 10.1.1.1

19 16:48:11.045 03/05/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 86400 seconds

20 16:48:11.045 03/05/02 Sev=Info/5 IKE/0x63000046
This SA has already been alive for 1 seconds,
setting expiry to 86399 seconds from now

21 16:48:11.075 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

22 16:48:11.075 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

23 16:48:11.075 03/05/02 Sev=Info/4 CM/0x63100015
Launch xAuth application

24 16:48:14.920 03/05/02 Sev=Info/4 CM/0x63100017
xAuth application returned

25 16:48:14.920 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

26 16:48:14.990 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

27 16:48:14.990 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

28 16:48:14.990 03/05/02 Sev=Info/4 CM/0x6310000E
Established Phase 1 SA. 1 Phase 1 SA in the system

29 16:48:15.000 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

30 16:48:15.010 03/05/02 Sev=Info/5 IKE/0x6300005D
Client sending a firewall request to concentrator

31 16:48:15.010 03/05/02 Sev=Info/5 IKE/0x6300005C
Firewall Policy: Product=Cisco Integrated Client,
Capability= (Centralized Policy Push).

32 16:48:15.010 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

33 16:48:15.141 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

34 16:48:15.141 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

35 16:48:15.141 03/05/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_ADDRESS: , value = 10.16.20.2

36 16:48:15.141 03/05/02 Sev=Info/5 IKE/0xA3000017
MODE_CFG_REPLY: The received (INTERNAL_ADDRESS_EXPIRY) attribute and value
(86395) is not supported

37 16:48:15.141 03/05/02 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = APPLICATION_VERSION, value = Cisco Internetwork
Operating System Software IOS (tm) C2600 Software (C2600-JK903S-M),
Version 12.2(8)T, RELEASE SOFTWARE (fc2)
TAC Support: <http://www.cisco.com/tac>
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Thu 14-Feb-02 16:50 by ccai

38 16:48:15.141 03/05/02 Sev=Info/5 IKE/0x6300000D
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_SPLIT_INCLUDE (# of split_nets),
value = 0x00000001

39 16:48:15.141 03/05/02 Sev=Info/5 IKE/0x6300000F
SPLIT_NET #1
subnet = 172.18.124.0
mask = 255.255.255.0
protocol = 0
src port = 0
dest port=0

40 16:48:15.141 03/05/02 Sev=Info/4 CM/0x63100019
Mode Config data received

41 16:48:15.151 03/05/02 Sev=Info/5 IKE/0x63000055

Received a key request from Driver for IP address 10.1.1.1,
GW IP = 10.1.1.1

42 16:48:15.151 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 10.1.1.1

43 16:48:15.361 03/05/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

44 16:48:15.461 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

45 16:48:15.461 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 10.1.1.1

46 16:48:15.461 03/05/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 3600 seconds

47 16:48:15.461 03/05/02 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

48 16:48:15.461 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 10.1.1.1

49 16:48:15.461 03/05/02 Sev=Info/5 IKE/0x63000058
Loading IPsec SA (Message ID = 0x07E6A9E1 OUTBOUND SPI = 0x0EA6FBC8
INBOUND SPI = 0x3C2B302B)

50 16:48:15.461 03/05/02 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0x0EA6FBC8

51 16:48:15.471 03/05/02 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x3C2B302B

52 16:48:15.471 03/05/02 Sev=Info/4 CM/0x6310001A
One secure connection established

53 16:48:15.511 03/05/02 Sev=Info/6 DIALER/0x63300003
Connection established.

54 16:48:15.581 03/05/02 Sev=Info/6 DIALER/0x63300008
MAPI32 Information - Outlook not default mail client

55 16:48:16.553 03/05/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

56 16:48:16.553 03/05/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0xc8fba60e into key list

57 16:48:16.553 03/05/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

58 16:48:16.553 03/05/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0xb302b3c into key list

59 16:48:26.357 03/05/02 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 172.18.124.159,
GW IP = 10.1.1.1

60 16:48:26.357 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 10.1.1.1

```
61 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

62 16:48:26.668 03/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 10.1.1.1

63 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 3600 seconds

64 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

65 16:48:26.668 03/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 10.1.1.1

66 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x63000058
Loading IPsec SA (Message ID = 0xB41A7B54 OUTBOUND SPI = 0x2359F2EE
INBOUND SPI = 0x42FC1D6A)

67 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0x2359F2EE

68 16:48:26.668 03/05/02 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x42FC1D6A

69 16:48:26.668 03/05/02 Sev=Info/4 CM/0x63100022
Additional Phase 2 SA established.
```

関連情報

- [IPSec ネゴシエーション/IKE プロトコルのサポート](#)
- [Request for Comments \(RFC \)](#)
- [テクニカル サポートとドキュメント - Cisco Systems](#)

翻訳について

シスコは世界中のユーザにそれぞれの言語でサポート コンテンツを提供するために、機械と人による翻訳を組み合わせて、本ドキュメントを翻訳しています。ただし、最高度の機械翻訳であっても、専門家による翻訳のような正確性は確保されません。シスコは、これら翻訳の正確性について法的責任を負いません。原典である英語版（リンクからアクセス可能）もあわせて参照することを推奨します。