

Verifica di MPLS sugli switch Catalyst 9000

Sommario

[Introduzione](#)

[Prerequisiti](#)

[Requisiti](#)

[Componenti usati](#)

[Premesse](#)

[Terminologia](#)

[Configurazione e verifica](#)

[Scenario 1. L3VPN con adiacenza a hop singolo nel core MPLS](#)

[Dettagli configurazione](#)

[Verifica di base](#)

[Programmazione prefissi](#)

[VPNv4 Label Programming](#)

[LDP Label Programming](#)

[Scenario 2. L3VPN con ECMP tra PE e router IP](#)

[Dettagli configurazione](#)

[Convalida di base](#)

[Programmazione prefissi](#)

[VPNv4 Label Programming](#)

[LDP Label Programming](#)

[Risoluzione dei problemi relativi alla scalabilità hardware](#)

[Syslog hardware MPLS](#)

[Comandi di convalida hardware](#)

[Etichetta MPLS e correzione del limite di scala IPv4](#)

[Comandi da raccogliere per TAC](#)

[Informazioni correlate](#)

Introduzione

Questo documento descrive come configurare e convalidare Multiprotocol Label Switching (MPLS) Layer 3 Virtual Private Network (VPN) sugli switch Catalyst serie 9000.

Prerequisiti

Requisiti

Cisco raccomanda la conoscenza dei seguenti argomenti:

- Inoltro IP
- Border Gateway Protocol (BGP)

- MPLS

Componenti usati

Le informazioni fornite in questo documento si basano sulle seguenti versioni software e hardware:

- C9500 su Cisco IOS® XE 16.12.4
- C9300 su Cisco IOS® XE 16.12.4
- C3850 su Cisco IOS® XE 16.9.6

Le informazioni discusse in questo documento fanno riferimento a dispositivi usati in uno specifico ambiente di emulazione. Su tutti i dispositivi menzionati nel documento la configurazione è stata ripristinata ai valori predefiniti. Se la rete è operativa, valutare attentamente eventuali conseguenze derivanti dall'uso dei comandi.

Premesse

Le VPN MPLS di livello 3 (L3VPN) utilizzano un modello peer-to-peer che utilizza BGP per distribuire le informazioni correlate alla VPN. Una VPN MPLS è costituita da un gruppo di siti interconnessi tramite una rete principale di un provider MPLS. In ogni sede del cliente, uno o più dispositivi CE (Customer Edge) vengono collegati a uno o più dispositivi PE (Provision Edge).

Nel routing convenzionale di layer 3, quando un pacchetto attraversa la rete, ciascuno switch estrae tutte le informazioni rilevanti per inoltrare il pacchetto dall'intestazione di layer 3. Queste informazioni vengono quindi utilizzate come indice per una ricerca nella tabella di routing per determinare l'hop successivo del pacchetto.

Nel caso più comune, l'unico campo pertinente nell'intestazione è il campo dell'indirizzo di destinazione, ma in alcuni casi possono essere rilevanti anche altri campi dell'intestazione. Di conseguenza, l'analisi dell'intestazione deve essere eseguita in modo indipendente su ciascuno switch attraverso cui passa il pacchetto. Inoltre, è necessario eseguire una complessa ricerca nella tabella su ciascuno switch.

In Label Switching, l'analisi dell'intestazione di layer 3 viene eseguita una sola volta. L'intestazione di layer 3 viene quindi mappata in un valore non strutturato a lunghezza fissa denominato **etichetta**.

Molte intestazioni diverse possono essere mappate alla stessa etichetta, purché tali intestazioni producano sempre la stessa scelta dell'hop successivo. In effetti, un'etichetta rappresenta una **classe di equivalenza di inoltro** (FEC) ovvero un insieme di pacchetti che, per quanto diversi, possono essere indistinguibili dalla funzione di inoltro.

La scelta iniziale di un'etichetta non deve necessariamente basarsi esclusivamente sul contenuto dell'intestazione del pacchetto di layer 3; ad esempio, la decisione di inoltrare i pacchetti agli hop successivi può essere basata anche su altri fattori.

Una volta assegnata un'etichetta, viene aggiunta un'intestazione breve all'inizio del pacchetto di layer 3. L'intestazione viene trasportata sulla rete come parte del pacchetto. Agli hop successivi attraverso ciascuno switch MPLS nella rete, le etichette vengono scambiate e le decisioni

vengono prese tramite la ricerca nella tabella di inoltro MPLS dell'etichetta contenuta nell'intestazione del pacchetto. Pertanto, non è necessario rivalutare l'intestazione del pacchetto durante il transito del pacchetto nella rete. Poiché l'etichetta è di lunghezza fissa e non strutturata, il processo di ricerca della tabella di inoltro MPLS è semplice e rapido.

Ogni LSR (Label Switching Router) della rete decide in modo locale e indipendente il valore di etichetta da utilizzare per rappresentare una classe di equivalenza di inoltro. Questa associazione è nota come associazione etichetta. Ogni LSR informa i propri vicini delle associazioni di etichette che ha creato. La conoscenza dei binding di etichette da parte degli switch adiacenti è facilitata dai seguenti protocolli:

- Label Distribution Protocol (LDP): consente ai LSR peer in una rete MPLS di scambiare informazioni sulle etichette per supportare l'inoltro hop-by-hop in una rete MPLS
- Border Gateway Protocol (BGP) - Utilizzato per supportare le reti VPN (Virtual Private Network) MPLS

Quando un pacchetto etichettato viene inviato da LSR A all'LSR B, il valore di etichetta trasportato dal pacchetto IP è il valore di etichetta assegnato dall'LSR B per rappresentare la classe di equivalenza dell'inoltro del pacchetto. Pertanto, il valore dell'etichetta cambia quando il pacchetto IP attraversa la rete.

Modalità d'uso della presente Guida

La guida è suddivisa in due scenari e alla fine del documento viene presentata una sezione di convalida della scala hardware:

- adiacenza single-hop nel core MPLS
- Adiacenze Equal Cost Multi-Path (ECMP) nel core MPLS
- come verificare l'utilizzo di TCAM per i problemi di scalabilità

Ogni scenario riguarda la verifica dei prefissi e delle etichette per ogni dispositivo MPLS.

Terminologia

MPLS	Multi-Protocol Label Switching	Tecnologia di inoltro di pacchetti ad alte prestazioni che integra le prestazioni e le funzionalità di gestione del traffico dello switching di livello collegamento (livello 2) con la scalabilità, la flessibilità e le prestazioni del routing di livello (livello 3).
PE	Provider Edge (switch/router)	Dispositivo perimetrale della rete del provider che riceve i prefissi IP da un cliente e li passa nel cloud MPLS.
CE	Customer Edge (switch/router)	Dispositivo presso la sede del cliente collegato al router periferico del provider di una rete IP/MPLS di un provider di servizi.
LDP	Label Discovery Protocol	LDP è un protocollo che genera e scambia automaticamente etichette tra router. Ogni router genera localmente etichette per i prefissi e quindi annuncia i valori delle etichette ai router adiacenti.
LSPA	Matrice percorsi cambio etichetta	Set di etichette per raggiungere una destinazione MPLS specifica. In una rete L3VPN - è possibile avere l'etichetta IGP + VPN. Se c'è un tunnel TE, allora l'etichetta TE + IGP + VPN. Catalyst 9000 può supportare fino a 6 etichette in questa serie di etichette è denominata LSPA.
ID stack etichette	ID stack etichette	A indice univoco per identificare uno stack di etichette (unconsente la condivisione LSPA).
Etichetta	Etichetta	Etichetta MPLS utilizzata per la ricerca. Più etichette costituiscono una pila


		etichette.
ID prefisso	Identificatore prefisso	Catalyst 9000 crea una risorsa globale per ogni prefisso. In caso di allocazione di etichette per prefisso, esistono tanti ID prefisso quanti sono i percorsi.
EM	Corrispondenza esatta	Voce nella memoria hash corrispondente a uno a uno (percorso host, host connesso direttamente).
LPM	Corrispondenza prefisso più lunga	Qualsiasi route che sia /31 o più breve (le route /32 sono di tipo EM).
TCAM	Memoria ternaria indirizzabile al contenuto	Un tipo di memoria che memorizza ed esegue query su voci con tre input diversi: 0, 1 e X. Questo tipo di memoria deve essere utilizzato nei casi in cui è possibile che esistano più corrispondenze alla stessa voce e l'hash risultante per ciascuna voce non è univoco. Questa tabella include una maschera o un valore "X" che consente di sapere se corrisponde o meno a questa voce.
CAMMA	Content-Addressable Memory Base	Termine generale per indicare la memoria hardware (Hash/TCAM).
COSTOLA	informazioni di routing	tabella di routing in 'show ip route'
FIB	Base informazioni di inoltro	tabella semplificata con prefissi aggiunti dalle tabelle RIB e ARP con un puntatore alla tabella ADJ
Connessione diretta	Route con connessione diretta	Un prefisso host connesso localmente (ARP adiacente)
Connesso indirettamente	Route con connessione indiretta	Percorso da raggiungere tramite un hop successivo remoto
RETTIFICA	Adiacente (tabella)	archivia le informazioni sull'hop successivo utilizzate per la riscrittura dei pacchetti
EM	Corrispondenza esatta	Host connessi, prefissi host indiretti /32
TCAM	Memoria ternaria indirizzabile al contenuto	Prefissi indiretti /31 o più brevi
FED	Driver motore di inoltro	Livello ASIC (hardware)
FMAN-FP	Forward Manager - Piano di inoltro	FMAN-FP gestisce gli oggetti software che aggiungono, eliminano o modificano le informazioni FED
SI	Indice stazione	Indice stazione = informazioni sulla riscrittura dei pacchetti (RI = Rewrite Index) e informazioni sull'interfaccia in uscita (DI = Destination Index)
RI	Riscrivi indice	Informazioni di riscrittura dell'indirizzo MAC per l'inoltro di livello 3 all'adiacente dell'hop successivo
ID	Indice destinazione	Indice che punta all'interfaccia in uscita

Configurazione e verifica

Scenario 1. L3VPN con adiacenza a hop singolo nel core MPLS

Topologia di riferimento

Ai fini di questo esempio, gli switch Catalyst 9300 funzionano come dispositivi PE, gli switch Catalyst 9500 in Stackwise Virtual come dispositivo P e gli switch Catalyst 3850 come dispositivi CE.

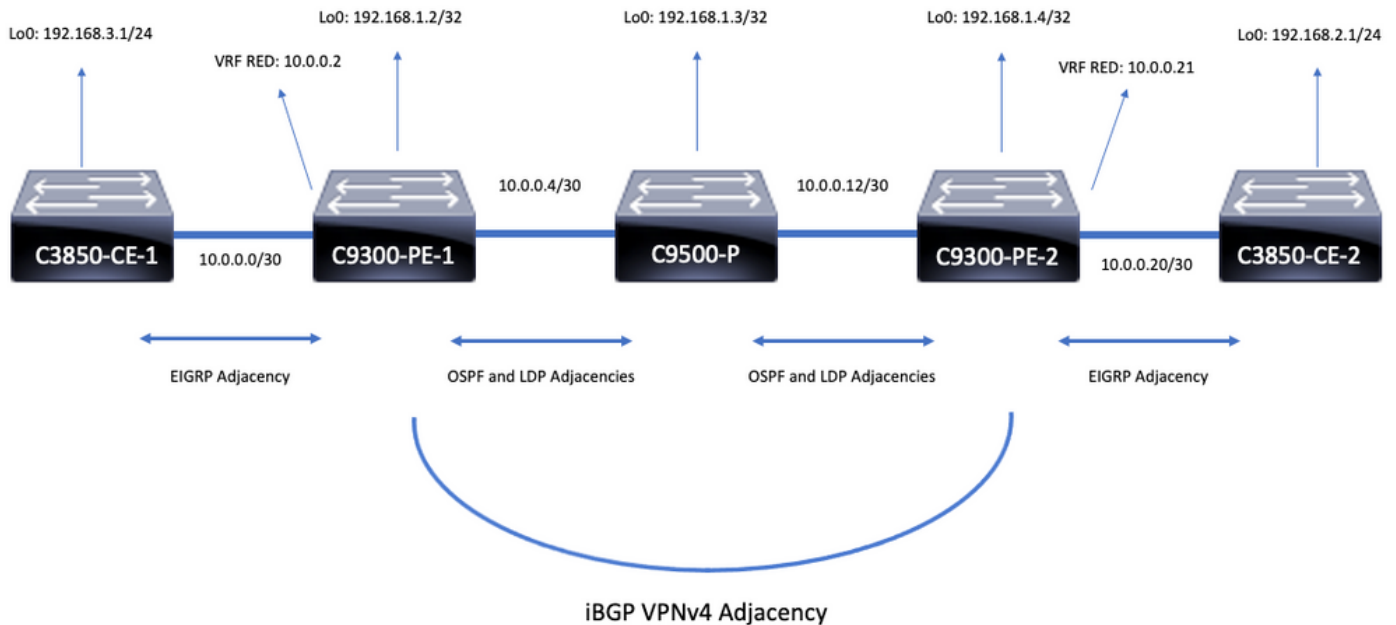

Dettagli configurazione

Configurazione di C3850-CE-1

```
hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2
```

Configurazione di C9300-PE-1

```
hostname C9300-PE-1
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
```

```
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
!
interface GigabitEthernet1/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.2 255.255.255.252
!
interface GigabitEthernet1/0/2
no switchport
ip address 10.0.0.5 255.255.255.252
!
router eigrp 420
!
address-family ipv4 vrf RED
network 10.0.0.0 0.0.0.3
autonomous-system 420
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.4 remote-as 69420
neighbor 192.168.1.4 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.4 activate
neighbor 192.168.1.4 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 420
exit-address-family
```

Configurazione di C9500-P

```
hostname C9500-P
!
interface Loopback0
ip address 192.168.1.3 255.255.255.255
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.6 255.255.255.252
!
interface TenGigabitEthernet1/0/2
no switchport
ip address 10.0.0.13 255.255.255.252
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
```

Configurazione di C9300-CE-2

```
hostname C9300-PE-2
!
```

```

ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 400
exit-address-family

```

Configurazione di C3850-CE-2

```

hostname C3850-CE-2
!
interface Loopback0
ip address 192.168.2.1 255.255.255.0
!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.22 255.255.255.252
!
router eigrp 400
network 10.0.0.20 0.0.0.3
network 192.168.2.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.21

```

Verifica di base

Prima della convalida della programmazione MPLS è necessario convalidare alcuni requisiti di base:

- Convalida presenza connettività da PE a PE
- Convalida del percorso con cambio di etichetta (LSP) tra i PE
- Convalida adiacenza BGPv4 tra PE
- Convalida etichette VPNv4 e LDP
- Convalida tabella di inoltro MPLS

Convalida connettività da PE a PE

È possibile eseguire il ping tra il loopback del PE remoto e l'origine dal loopback locale, ma questa operazione non conferma che il percorso LSP (Label Switched Path) di MPLS sia valido, poiché gli indirizzi IP di loopback vengono annunciati nell'immagine sottostante.

Nota: l'adiacenza da PE a MP-BGP VPNv4 viene raggiunta tramite le rispettive interfacce Loopback0.

```
C9300-PE-1#ping 192.168.1.4 source 192.168.1.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms C9300-PE-1#show ip route
192.168.1.4
Routing entry for 192.168.1.4/32
Known via "ospf 420", distance 110, metric 3, type intra area
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 00:55:58 ago
Routing Descriptor Blocks:
* 10.0.0.6, from 192.168.1.4, 00:55:58 ago, via GigabitEthernet1/0/2
Route metric is 3, traffic share count is 1
```

Convalida provider di servizi di traduzione

È possibile utilizzare un traceroute MPLS da PE a PE per convalidare l'LSP e tutte le etichette LDP MPLS lungo il percorso.

Nota: questo traceroute MPLS impone solo un'etichetta, l'etichetta LDP. Ciò non dimostra che il traffico proveniente dal CE abbia successo, poiché il traffico viene imposto con 2 etichette, l'etichetta VPNv4 (interna) e l'etichetta LDP (esterna).

```
C9300-PE-1#traceroute mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds

Codes: '.' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0

Type escape sequence to abort.
0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
```



```
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 8 ms
! 2 10.0.0.14 2 ms
```

Se non si dispone dell'accesso al CE o a un dispositivo dietro il CE e si desidera dimostrare che l'imposizione/disposizione delle etichette VPNv4 e LDP ha esito positivo, è possibile tentare di eseguire il ping dall'interfaccia con interfaccia CE nel VRF su un PE all'altra interfaccia con interfaccia CE nel VRF sul PE remoto.

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:
Packet sent with a source address of 10.0.0.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
```

Convalida adiacenza VPNv4 BGP tra PE

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
BGP version 4, remote router ID 192.168.1.4
BGP state = Established, up for 00:57:37
Last read 00:00:41, last write 00:00:41, hold time is 180, keepalive interval is 60 seconds
Neighbor sessions:
1 active, is not multisession capable (disabled)
Neighbor capabilities:
Route refresh: advertised and received(new)
Four-octets ASN Capability: advertised and received
Address family IPv4 Unicast: advertised and received
Address family VPNv4 Unicast: advertised and received
Enhanced Refresh Capability: advertised and received
Multisession Capability:
Stateful switchover support enabled: NO for session 1
Message statistics:
InQ depth is 0
OutQ depth is 0

Sent Rcvd
Opens: 1 1
Notifications: 0 0
Updates: 6 6
Keepalives: 62 63
Route Refresh: 0 0
Total: 69 70
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds
<snip>
```

```
C9300-PE-2#show bgp vpnv4 unicast all neighbors 192.168.1.2
BGP neighbor is 192.168.1.2, remote AS 69420, internal link
BGP version 4, remote router ID 192.168.1.2
BGP state = Established, up for 01:01:00
Last read 00:00:13, last write 00:00:37, hold time is 180, keepalive interval is 60 seconds
Neighbor sessions:
1 active, is not multisession capable (disabled)
Neighbor capabilities:
Route refresh: advertised and received(new)
Four-octets ASN Capability: advertised and received
Address family IPv4 Unicast: advertised and received
Address family VPNv4 Unicast: advertised and received
```

Enhanced Refresh Capability: advertised and received
Multisession Capability:
Stateful switchover support enabled: NO for session 1
Message statistics:
InQ depth is 0
OutQ depth is 0

Sent Rcvd
Opens: 1 1
Notifications: 0 0
Updates: 6 6
Keepalives: 67 66
Route Refresh: 0 0
Total: 74 73
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

L'adiacenza VPNv4 PE remota è attiva ed è stato ricevuto un prefisso

C9300-PE-1#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:19:10 Jun 1 2021 UTC (01:32:00.716 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.4	4	69420	108	108	7	0	0	01:34:52	2

C9300-PE-2#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:18:31 Jun 1 2021 UTC (01:37:30.404 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.2	4	69420	114	114	7	0	0	01:40:22	2

Verificare quali prefissi vengono scambiati nel VRF specifico

C9300-PE-1#**show ip bgp vpnv4 vrf RED**

BGP table version is 10, local router ID is 192.168.1.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*> 192.168.1.0	10.0.0.1	130816		32768	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?

C9300-PE-2#show ip bgp vpnv4 vrf RED

BGP table version is 9, local router ID is 192.168.1.4

Status codes: s suppressed, d damped, h history, * valid, > best, i - internal, r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter, x best-external, a additional-path, c RIB-compressed, t secondary path, L long-lived-stale,

Origin codes: i - IGP, e - EGP, ? - incomplete

RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*>i 192.168.1.0	192.168.1.2	130816	100	0	?
*> 192.168.2.0	10.0.0.22	130816		32768	?

Convalida etichette VPNv4 e LDP:

Verificare l'etichetta VPNv4 utilizzata per raggiungere i prefissi nel VRF

C9300-PE-1#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.1.0	10.0.0.1	21/nolabel
192.168.2.1/32	192.168.1.4	nolabel/21 <-- VPNv4 label that is imposed to reach 192.168.2.0

C9300-PE-1#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "bgp 69420", distance 200, metric 130816, type internal

Last update from 192.168.1.4 01:31:56 ago

Routing Descriptor Blocks:

* 192.168.1.4 (default), from 192.168.1.4, 01:31:56 ago

Route metric is 130816, traffic share count is 1

AS Hops 0

MPLS label: 21 <-- VPNv4 label that matches the previous output

MPLS Flags: MPLS Required

C9300-PE-2#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.1.0	192.168.1.2	nolabel/21
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach 192.168.2.0

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal
 Redistributing via eigrp 400, bgp 69420
 Advertised by bgp 69420
 Last update from 10.0.0.22 on GigabitEthernet2/0/1, 01:34:42 ago
 Routing Descriptor Blocks:
 * 10.0.0.22, from 10.0.0.22, 01:34:42 ago, via GigabitEthernet2/0/1 <-- **CE-facing interface in the VRF**
 Route metric is 130816, traffic share count is 1
 Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit
 Reliability 255/255, minimum MTU 1500 bytes
 Loading 1/255, Hops 1

Verificare le etichette LDP utilizzate

C9300-PE-1#show mpls forwarding-table 192.168.1.4

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2

C9300-PE-2#show mpls forwarding-table 192.168.1.2

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0		Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.4 through Gi2/0/2

Convalida tabella di inoltro MPLS

C9300-PE-1#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi1/0/2	10.0.0.6
17	Pop Label	10.0.0.16/30	0		Gi1/0/2	10.0.0.6
18	Pop Label	10.0.0.12/30	0		Gi1/0/2	10.0.0.6
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6
20	No Label	10.0.0.0/30[V]	1982		aggregate/RED	
21	No Label	192.168.3.0/24[V]	\			
			0		Gi1/0/1	10.0.0.1

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0		Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	164		Gi2/0/2	10.0.0.13
	16	192.168.1.2/32	1224		Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0		Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	0		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\			
			1440		Gi2/0/1	10.0.0.22

Confermare le etichette interne (VPNv4) e esterne (LDP) utilizzate per raggiungere ciascun prefisso specificato nel VRF

C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.1/32, epoch 0, flags [rib defined all labels]
 recursive via 192.168.1.4 label 21 <-- **VPNv4 label**
 nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is be

**imposed to reach the remote PE,
19 is the local LDP label advertised to the P router**

```
C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail
192.168.1.1/32, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.2 label 22 <-- VPNv4 label
    nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
be imposed to reach the remote PE,
17 is the local LDP label
```

advertised to the P router

Verifica statistiche Object Manager

Negli scenari ideali, non sono presenti oggetti in sospeso

```
C9300-PE-1#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:    Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
9500-P#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:    Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:    Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

Programmazione prefissi

Nella sezione successiva viene illustrata la programmazione dei prefissi sui router MPLS, C9300-PE-1, C9500-P e C9300-PE-2.

Programmazione prefissi C9300-PE-1

Software Prefix Programming

C9300-PE-1#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "bgp 69420", distance 200, metric 130816, type internal

Last update from 192.168.1.4 20:21:40 ago

Routing Descriptor Blocks:

* **192.168.1.4** (default), from 192.168.1.4, 20:21:40 ago <-- **Remote PE reachable in the global routing table**

Route metric is 130816, traffic share count is 1

AS Hops 0

MPLS label: **21 <-- VPNv4 label**

MPLS Flags: MPLS Required

C9300-PE-1#show ip route 192.168.1.4

Routing entry for 192.168.1.4/32

Known via "ospf 420", distance 110, metric 3, type intra area

Last update from 10.0.0.6 on GigabitEthernet1/0/2, 21:27:11 ago

Routing Descriptor Blocks:

* **10.0.0.6**, from 192.168.1.4, 21:27:11 ago, via **GigabitEthernet1/0/2 <-- Next-hop 10.0.0.6 via Gi1/0/2 to reach**

Route metric is 3, traffic share count is 1

FMAN RP Prefix Programming

C9300-PE-1#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <-- Index value is the VRF ID from previous command

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_LABEL	0x14

C9300-PE-1#show platform software mpls switch active r0 label index 0x14 <-- Utilize the Index value from previous command

Label OCE 0x14 -> OBJ_LABEL (0x17) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1

Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x3480636fb0

C9300-PE-1#show platform software mpls switch active r0 label index 0x17 <-- Utilize the OBJ_LABEL value from previous command

Label OCE 0x17 -> OBJ_ADJACENCY (0x46) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348062f858

C9300-PE-1#show platform software adjacency switch active r0 index 0x46 <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 6

Adjacency id: 0x46 (70)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG <-- Egress interface
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480636280

FMAN FP Prefix Programming

C9300-PE-1#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only
Flags: 0xC
Interfaces:
 Gi1/0/1
Address family ipv4 unicast (Table ID = 0x2):
Flags: 0x0
Export VPN route-target communities
 RT:69:69
Import VPN route-target communities
 RT:69:69
No import route-map
No global export route-map
No export route-map
VRF label distribution protocol: not configured
VRF label allocation mode: per-prefix

C9300-PE-1#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail <-- Index value is the VRF ID from previous command

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x14), urpf: 15 <-- Utilized in next command
Prefix Flags: unknown
aom id: 648, HW handle: (nil) (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x14 <-- Utilize the OBJ_LABEL value from the previous command

Label OCE 0x14 -> OBJ_LABEL (0x17) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001
aom id: 647, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x17 <-- Utilize the OBJ_LABEL value from the previous command

Label OCE 0x17 -> OBJ_ADJACENCY (0x46) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 664, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x46 <-- Utilize the OBJ_ADJACENCY value from the previous command

Number of adjacency objects: 6

Adjacency id: 0x46 (70)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG <-- Egress interface
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 522, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-1#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

2	192.168.2.0/24		0x7feeca12bb8	0x0	0	0	lspa0x2
---	----------------	--	---------------	-----	---	---	---------

2021/06/14 17:13:59.644 <-- HTM value significant for next command

FIB: prefix_hdl:0x5000002a, mpls_ecr_prefix_hdl:0

=====
OCE chain =====

LABEL:objid:20 link_type:MPLS local_label:1048577 outlabel:(21, 0) <-- VPNv4 Label

flags:0x1:(REAL,) pdflags:0x80:(INSTALL_HW_OK,RECIR_ADJ,) adj_handle:0x5100003d <--

adj_handle and local_adj_hdl values must match

unsupported recursion:0 olbl_changed 0 local_adj:1 modify_cnt:1

bwalk_cnt:0 subwalk_cnt:1 collapsed_oce:0

AAL: id:1358954557 lbl:19 smac:0000.0000.0000 dmac:0000.0000.0000 <-- Label 19 matches the

local transport label

sub_type:0 link_type:0 adj_flags:0x10 label_type:0 rewrite_type:PSH2(121)

vlan_id:0 vrf_id:0 ri:0x7feeca9acf8, ri_id:0x46 phdl:0, ref_cnt:2 <-- ri_id and

ri_idx values must match

si:0x7feeca6ab98, si_id:0xb6, di_id:0x5013

LABEL:objid:23 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Label 19 is the local

transport label, Label 17 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x50000034

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1342177332 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4 <-- Matches the next-hop

information to reach 192.168.2.0/24

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7feecd6d238, ri_id:0x3e phdl:0x9f00004b, ref_cnt:1

si:0x7feecd706d8, si_id:0x4013, di_id:0x535f <-- di_id utilized in subsequent

commands

ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0x94000021, }


```

index = 0x535f
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

```

C9300-PE-1#show plat soft fed switch active ifm mappings
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet1/0/2  0x36      1  0  1  1  0  6  7  2  2  NIF Y  <-
- Port 1 is the egress port, Gi1/0/2

```

Programmazione prefissi C9500-P

Software Prefix Programming

```

C9500-P#show ip route 192.168.1.4
Routing entry for 192.168.1.4/32
  Known via "ospf 420", distance 110, metric 2, type intra area
  Last update from 10.0.0.14 on TenGigabitEthernet1/0/2, 1d21h ago
  Routing Descriptor Blocks:
  * 10.0.0.14, from 192.168.1.4, 1d21h ago, via TenGigabitEthernet1/0/2 <-- Next-hop to reach
192.168.1.4
    Route metric is 2, traffic share count is 1

```

```

C9500-P#show ip cef 192.168.1.4 detail
192.168.1.4/32, epoch 4
  dflt local label info: global/17 [0x3]
  nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17)

```

FMAN RP Prefix Programming

```

C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32
Forwarding Table

```

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LABEL	0x16 <-- Value used in next command

```

C9500-P#show platform software mpls switch active r0 label index 0x16 <-- Utilize the OBJ_LABEL
value from previous command

```

```

Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Value used in next command

```

```

Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34806492f0

```

```

C9500-P#show platform software adjacency switch active r0 index 0x49 <-- Utilize OBJ_ADJACENCY
value from previous command

```

```

Number of adjacency objects: 8

```

```

Adjacency id: 0x49 (73)

```

Interface: **TenGigabitEthernet1/0/2**, IF index: 66, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.14** <-- Next-hop IP
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480647760

*****FMAN FP Prefix Programming*****

C9500-P#**show platform software ip switch active f0 cef prefix 192.168.1.4/32 detail**
Forwarding Table

192.168.1.4/32 -> OBJ_LABEL (0x16), urpf: 21 <-- Used in subsequent command
Prefix Flags: unknown
aom id: 567, HW handle: (nil) (created)

C9500-P#**show platform software mpls switch active f0 label index 0x16** <-- Utilize the OBJ_LABEL value from previous command

Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Used in subsequent command
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 589, CPP handle: 0xdeadbeef (created)

C9500-P#**show platform software adjacency switch active f0 index 0x49** <-- Utilize the OBJ_ADJACENCY from previous command
Number of adjacency objects: 8

Adjacency id: 0x49 (73)
Interface: **TenGigabitEthernet1/0/2**, IF index: 66, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.14** <-- Next-hop IP
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 535, HW handle: (nil) (created)

***** FED Prefix Programming*****

C9500-P#**show platform software fed switch active ip route 192.168.1.4/32**

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
---	----	---	-----	---	----	-----	-----
0	192.168.1.4/32		0x7f790c4cf0e8 0x0	0	0		

2021/06/14 22:10:54.150 <-- HTM value significant for next command

FIB: prefix_hdl:0x6a000020, mpls_ecr_prefix_hdl:0
===== OCE chain =====

LABEL:objid:22 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xb9000037
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3103785015 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-hop information to reach 192.168.1.4/32

```
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f790c4cdfd8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
si:0x7f790c4c22f8, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent commands
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x2d000027, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lsps_hdl:0
=====
```

C9500-P#**show platform hardware fwd-asic abstraction print-resource-handle 0x7f790c4cf0e8 1 <-- Utilize the HTM value from previous command**

```
Handle:0x7f790c4cf0e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f790c4cf2f8
Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00
```

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f790c4cf2f8)

Absolute Index: 126650

Time Stamp: 40

KEY - vrf:0 mtr:0 **prefix:192.168.1.4** rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 **prefix:0.0.0.0** rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
afdLabelOrDestClientId:0 SI:16395 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:38 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9500-P#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x2 0x2 <-- Utilize the di_id value from the previous command**

ASIC#0:

index = 0x2

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x2

pmap = 0x00000000 **0x00000002 <-- 0x00000002 in binary is 0000 0000 0000 0000 0000 0000 0000 =**

Port 1 (Zero based, count right to left)

```
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

C9500-P#show platform software fed switch active ifm mappings

```
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
TenGigabitEthernet1/0/2  0x42      1  0  1  1  0  10  1  2  2  NIF Y  <-
- Port 1 is the egress port, TenGig1/0/2
```

Programmazione prefissi C9300-PE-2

Software Prefix Programming

```
C9300-PE-2#show ip route vrf RED 192.168.2.1
```

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 1d21h ago

Routing Descriptor Blocks:

* **10.0.0.22**, from 10.0.0.22, 1d21h ago, via GigabitEthernet2/0/1 <-- **Next-hop reachable in the VRF**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

```
C9300-PE-2#show ip route vrf RED 10.0.0.22
```

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Routing Descriptor Blocks:

* **directly connected**, via GigabitEthernet2/0/1 <-- **Next-hop directly connected**

Route metric is 0, traffic share count is 1

```
C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail
```

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2]

nexthop 10.0.0.22 GigabitEthernet2/0/1

FMAN RP Prefix Programming

```
C9300-PE-2#show ip vrf detail
```

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi2/0/1
Address family ipv4 unicast (Table ID = 0x2):
Flags: 0x0
Export VPN route-target communities
RT:69:69
Import VPN route-target communities
RT:69:69
No import route-map
No global export route-map
No export route-map
VRF label distribution protocol: not configured
VRF label allocation mode: per-prefix

C9300-PE-2#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24
Forwarding Table

Prefix/Len	Next Object	Index
-----	-----	-----
192.168.2.0/24	OBJ_ADJACENCY	0x19

C9300-PE-2#show platform software adjacency switch active r0 index 0x19 <-- Utilize the Index value from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is DMAC, MAC ending in AE42 is SMAC, 0x800 is the IP ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: no-l3-inject

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.22

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x348062f118

FMAN FP Prefix Programming

C9300-PE-2#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24
detail

Forwarding Table

192.168.2.0/24 -> OBJ_ADJACENCY (0x19), urpf: 30 <-- Utilized in next command

Prefix Flags: unknown

aom id: 665, HW handle: (nil) (created)

QPPB precedence: 0

C9300-PE-2#show platform software adjacency switch active f0 index 0x19 <-- Utilize the OBJ_ADJACENCY from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: no-l3-inject

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.22

IP FRR MCP_ADJ_IPFRR_NONE 0

aom id: 659, HW handle: (nil) (created)

FED Prefix Programming

```

C9300-PE-2#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24
vrf  dest          htm          flags  SGT  DGID MPLS Last-
modified
---  ----          ---          -----  ---  ----  ----  -----
-----
2      192.168.2.0/24          0x7f7fb4a25648 0x0    0    0
2021/06/14 17:04:13.460 <-- HTM value significant for next command
  FIB: prefix_hdl:0x6e00002a, mpls_ecr_prefix_hdl:0
  ===== OCE chain =====
  ADJ:objid:25 {link_type:IP ifnum:0x35, si:0x3300003e, IPv4:      10.0.0.22 }
  =====
  MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0

  =====

```

```

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f7fb4a25648 1 <-- Utilize HTM value from previous command
Handle:0x7f7fb4a25648 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f7fb4a10e58
Features sharing this resource:Cookie length: 12
01 02 a8 c0 00 00 02 d0 07 00 00 00

```

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f7fb4a10e58)

Absolute Index: 66036

Time Stamp: 164911

KEY - vrf:2 mtr:0 prefix:192.168.2.0 rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 prefix:0.0.0.255 rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:182 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UserRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

```

C9300-PE-2#show platform software fed switch active ip adj

```

IPV4 Adj entries

```

dest          if_name          dst_mac          si_hdl          ri_hdl          pd_flags
adj_id Last-modified
-----  -----
-----  -----
-----  -----

```

```

10.0.0.22      GigabitEthernet2/0/1    0072.78c8.c9c2    0x7f7fb4a44048 0x7f7fb4b089d8 0x0
0x19          2021/06/14 16:59:43.447 <-- si_hdl used in next command

```

```

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f7fb4a44048 1 <-- Utilize the si_hdl value from previous command

```

Handle:0x7f7fb4a44048 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-

ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1

priv_ri/priv_si Handle: 0x7f7fb4b089d8Hardware Indices/Handles: index0:0xb6

mtu_index/l3u_ri_index0:0x0 index1:0xb6 mtu_index/l3u_ri_index1:0x0

Features sharing this resource:66 (1)]

Cookie length: 56

00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00
00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xb6]

RI = 0x2b

DI = **0x5338**

stationTableGenericLabel = 0

stationFdConstructionLabel = 0x7

lookupSkipIdIndex = 0

rcpServiceId = 0

dejaVuPreCheckEn = 0

Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

Station Index (SI) [0xb6]

RI = 0x2b

DI = **0x5338**

stationTableGenericLabel = 0

stationFdConstructionLabel = 0x7

lookupSkipIdIndex = 0

rcpServiceId = 0

dejaVuPreCheckEn = 0

Replication Bitmap: LD

=====

C9300-PE-2#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x5338 0x5338** <-- Utilize the DI value from previous command

ASIC#0:

index = 0x5338

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x5338

pmap = 0x00000000 **0x00000001** <-- **0x00000001** in binary is 0000 0000 0000 0000 0000 0000 0000 0001
= Port 0 (Zero based, count right to left)

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0


```
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9300-PE-2#show platform software fed switch active ifm map
```

```
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet2/0/1  0x35      1  0  1  0  0  26  6  1  97  NIF  Y  <-
- Port 0 is the egress port, Gi2/0/1
```

VPNv4 Label Programming

Nella sezione successiva viene illustrata la programmazione delle etichette VPNv4 sui router MPLS PE, C9300-PE-1 e C9300-PE-2. Poiché C9500 non viene inoltrato sull'etichetta VPNv4, non è presente alcun output da C9500.

C9300-PE-1 VPNv4 Label Programming:

Controllare il prefisso locale del PE, non il prefisso remoto.

```
***Software VPNv4 Label Programming***
```

```
C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail
```

```
192.168.3.0/24, epoch 0
```

```
QOS: Precedence routine (0)
```

```
dfmt local label info: other/22 [0x2] <-- VPNv4 label associated with the local prefix
```

```
nexthop 10.0.0.1 GigabitEthernet1/0/1
```

```
*** FMAN RP VPNv4 Label Programming***
```

```
C9300-PE-1#show platform software mpls switch active r0 eos index 24 <-- Utilize the objid from the FED command
```

```
EOS Choice 0x18, Number of paths: 2
```

```
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
```

```
Next Object Index: 0,0x17
```

```
OM handle: 0x3480631760
```

```
***FMAN FP VPNv4 Label Programming***
```

```
C9300-PE-1#show platform software mpls switch active f0 eos index 24 <-- Utilize the objid from the FED command
```

```
EOS Choice 0x18, Number of paths: 2
```

```
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
```

```
Next Object Index: 0,0x17
```

```
aom id: 5748, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 5748 <-- Utilize the aom id from previous command
```

```
Object identifier: 5748
```

```
Description: EOS Choice 0x18
```

```
Status: Done, Epoch: 0, Client data: 0x63150908
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 5748 parents <-- Utilize the aom id
```

```
Object identifier: 7
```

Description: Special Object adj_drop
Status: Done

Object identifier: 5746
Description: label 0x17
Status: Done

*****FED VPNv4 Label Programming*****

```
C9300-PE-1#show platform software fed switch active mpls forwarding label 22 detail
LENTRY:label:22 nobj:(EOS, 24) lentry_hdl:0x800000a
  modify_cnt:1 backwalk_cnt:0
  lsp_handle:0
  AAL: id:134217738 lbl:22
    eos0:[adj_hdl:0, hw_hdl:0x7fa4c4d72e08]
    eos1:[adj_hdl:0x6e00003e, hw_hdl:0x7fa4c4d72c58]
    deagg_vrf_id = 0 lsp_handle:0
  EOS:objid:24 local_label:0 flags:0:( ) pdflags:0 <-- Utilized in previous commands
  nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 23) modify:0 bwalk:0
  LABEL:objid:23 link_type:IP local_label:22 outlabel:(1048577, 0)
    flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x6e00003e
    unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:1845493822 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4
      sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
      vlan_id:0 vrf_id:0 ri:0x7fa4c4a81af8, ri_id:0x44 phdl:0xf1000024, ref_cnt:1
      si:0x7fa4c4d83da8, si_id:0x4012, di_id:0x5338
    ADJ:objid:113 {link_type:IP ifnum:0x35, si:0x2000003a, IPv4:      10.0.0.1 }
```

Verificare l'etichetta C9300-PE-2 VPNv4:

Controllare il prefisso locale del PE, non il prefisso remoto

*****Software VPNv4 Label Programming*****

```
C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail
192.168.2.0/24, epoch 0
  QOS: Precedence routine (0)
  dflt local label info: other/21 [0x2] <-- VPNv4 label associated with local prefix
  nexthop 10.0.0.22 GigabitEthernet2/0/1
```

***** FMAN RP VPNv4 Label Programming*****

```
C9300-PE-2#show platform software mpls switch active r0 eos index 61 <-- Use the objid from the
FED command
```

```
EOS Choice 0x3d, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x3b
  OM handle: 0x348063f2f8
```

***** FMAN FP VPNv4 Label Programming*****

```
C9300-PE-2#show platform software mpls switch active f0 eos index 61 <-- Use the objid from the
FED command
```

```
EOS Choice 0x3d, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x3b
  aom id: 3541, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command
```

```
C9300-PE-2#show platform software object-manager switch active f0 object 3541 <-- Use the aom id
from previous command
```

Object identifier: 3541
Description: EOS Choice 0x3d
Status: Done, Epoch: 0, Client data: 0x11079188

C9300-PE-2#**show platform software object-manager switch active f0 object 3541 parents <-- Use the aom id from previous command**

Object identifier: 7
Description: Special Object adj_drop
Status: Done

Object identifier: 3540
Description: label 0x3b
Status: Done

*** FED VPNv4 Label Programming***

C9300-PE-2#**show platform software fed switch active mpls forwarding label 21 detail**

```
LENTRY:label:21 nobj:(EOS, 61) lentry_hdl:0x69000009
  modify_cnt:3 backwalk_cnt:0
  lsp_handle:0
  AAL: id:1761607689 lbl:21
    eos0:[adj_hdl:0, hw_hdl:0x7fe8f8a71bd8]
    eos1:[adj_hdl:0x49000040, hw_hdl:0x7fe8f8a72458]
    deagg_vrf_id = 0 lsp_handle:0
  EOS:objid:61 local_label:0 flags:0:( ) pdflags:0 <-- Utilized in previous commands
  nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 59) modify:0 bwalk:0
  LABEL:objid:59 link_type:IP local_label:21 outlabel:(1048577, 0)
    flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x49000040
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:1224736832 lbl:0 smac:70d3.79be.ae42 dmac:0072.78c8.c9c2
      sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
      vlan_id:0 vrf_id:0 ri:0x7fe8f8a8ab98, ri_id:0x44 phdl:0xf1000024, ref_cnt:1
      si:0x7fe8f8a6ae08, si_id:0x4006, di_id:0x5338
    ADJ:objid:25 {link_type:IP ifnum:0x35, si:0x800003e, IPv4:      10.0.0.22 }
```

LDP Label Programming

Nella sezione successiva viene illustrata la programmazione delle etichette LDP sui router MPLS, C9300-PE-1, C9500-P e C9300-PE-2.

L'etichetta LDP (router) è l'etichetta della rete MPLS su cui i pacchetti vengono commutati. Convalidare l'etichetta LDP locale annunciata al PE remoto. Non convalidare l'etichetta LDP remota.

C9300-PE-1 LDP Label Programming:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Controllare l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

Software LDP Label Programming

C9300-PE-1#**show mpls forwarding-table**

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi1/0/2	10.0.0.6
18	Pop Label	10.0.0.12/30	0	Gi1/0/2	10.0.0.6
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6 <-- LDP Label 19 is advertised to Remote PE 192.168.1.4, validate LDP label 19

```
20          No Label    10.0.0.0/30[V]    1890          aggregate/RED
22          No Label    192.168.3.0/24[V] \
                                     1982          Gil/0/1      10.0.0.1
```

*****FMAN RP LDP Label Programming*****

C9300-PE-1#show platform software mpls switch active r0 label index 59

```
Label OCE 0x3b -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34805f3dc8
```

*****FMAN FP LDP Label Programming*****

C9300-PE-1#show platform software mpls switch active f0 label index 59

```
Label OCE 0x3b -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 7065, CPP handle: 0xdeadbeef (created)
```

C9300-PE-1#show platform software object-manager switch active f0 object 7065

```
Object identifier: 7065
Description: label 0x3b
Status: Done, Epoch: 0, Client data: 0x63152218
```

C9300-PE-1#show platform software object-manager switch active f0 object 7065 parents

```
Object identifier: 511
Description: adj 0x46, Flags None
Status: Done
```

*****FED LDP Label Programming*****

C9300-PE-1#show platform software fed switch active mpls forwarding label 19 detail

```
LENTRY:label:19 nobj:(LABEL, 59) lentry_hdl:0xef000007
  modify_cnt:7 backwalk_cnt:0
  lsp_handle:0
  AAL: id:4009754631 lbl:19
    eos0:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6cae8]
    eos1:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6c8e8]
    deagg_vrf_id = 0 lsp_handle:0
  LABEL:objid:59 link_type:MPLS local_label:19 outlabel:(17, 0)
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x91000056
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:2432696406 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
      sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
      vlan_id:0 vrf_id:0 ri:0x7fa4c4d75fa8, ri_id:0x26 phdl:0x9f00004b, ref_cnt:1
      si:0x7fa4c4d5f6c8, si_id:0x4013, di_id:0x535f
    ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0x25000021, }
```

Programmazione etichette LDP C9500:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Controllare l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

*****Software LDP Label Programming*****

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	23409		Tel/0/1	10.0.0.5 <-- LDP label 16 is advertised to reach PE 192.168.1.2
17	explicit-n	192.168.1.4/32	23345		Tel/0/2	10.0.0.14 <-- LDP label 17 is advertised to reach PE 192.168.1.4

FMAN RP LDP Label Programming

C9500-P#show platform software mpls switch active r0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480645150

FMAN FP LDP Label Programming

C9500-P#show platform software mpls switch active f0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 654, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 654 <-- Use the aom id from the previous command

Object identifier: 654
Description: label 0x17
Status: Done, Epoch: 0, Client data: 0x4b41c08

C9500-P#show platform software object-manager switch active f0 object 654 parents <-- Use the aom id from the previous command

Object identifier: 515
Description: adj 0x3f, Flags None
Status: Done

FED LDP Label Programming

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LABEL, 23) lentry_hdl:0xec000004
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:3959422980 lbl:16
eos0:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be3c8]
eos1:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be1b8]
deagg_vrf_id = 0 lspa_handle:0
LABEL:objid:23 link_type:MPLS local_label:16 outlabel:(0, 0) <-- Utilized in previous commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc3000055
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3271557205 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f289449bf88, ri_id:0x44 phdl:0xe9000057, ref_cnt:1
si:0x7f2894489b58, si_id:0x4009, di_id:0x1
ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x57000023, }

Software LDP Label Programming

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	23409		Tel/0/1	10.0.0.5
17	explicit-n	192.168.1.4/32	23345		Tel/0/2	10.0.0.14

*****FMAN RP LDP Label Programming*****

C9500-P#show platform software mpls switch active r0 label index 64 <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
 Flags: Real, Number of labels in the OCE: 1
 Label values: 0
 Backup flags: Pop, UHP, backup label 0x100001
 OM handle: 0x3480641d08

*****FMAN FP LDP Label Programming*****

C9500-P#show platform software mpls switch active f0 label index 64 <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
 Flags: Real, Number of labels in the OCE: 1
 Label values: 0
 Backup flags: Pop, UHP, backup label 0x100001
aom id: 657, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 657 <-- Use the aom id value from previous command

Object identifier: 657
 Description: label 0x40
 Status: Done, Epoch: 0, Client data: 0x4b523f8

C9500-P#show platform software object-manager switch active f0 object 657 parents<-- Use the aom id value from previous command

Object identifier: 535
 Description: adj 0x49, Flags None
 Status: Done

*****FED LDP Label Programming*****

C9500-P#show platform software fed switch active mpls forwarding label 17 detail

LENTRY:label:17 nobj:(LABEL, 64) lentry_hdl:0x8d000005
 modify_cnt:6 backwalk_cnt:0
 lsp_handle:0
 AAL: id:2365587461 lbl:17
 eos0:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480438]
 eos1:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480228]
 deagg_vrf_id = 0 lsp_handle:0
 LABEL:objid:64 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Utilized in previous commands
 flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xcc000037
 unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
 bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
 AAL: id:3422552119 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
 sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
 vlan_id:0 vrf_id:0 ri:0x7f2894498008, ri_id:0x38 phdl:0x76000058, ref_cnt:1
 si:0x7f2894498478, si_id:0x400b, di_id:0x2
 ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x3d000027, }

C9300-PE-2 LDP Label Programming:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Controllare l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

*****Software LDP Label Programming*****

C9300-PE-2#**show mpls forwarding-table**

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
17	16	192.168.1.2/32	630		Gi2/0/2	10.0.0.13 <-- LDP label 17 is advertised to Remote PE 192.168.1.2
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
20	No Label	10.0.0.20/30[V]	1260		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\			
			2070		Gi2/0/1	10.0.0.22

C9300-PE-2#**show platform software mpls switch active r0 label index 82 <-- Utilize the obj id value from the FED Command**

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348063ad00

C9300-PE-2#**show platform software mpls switch active f0 label index 82 <-- Utilize the obj id value from the FED Command**

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 3624, CPP handle: 0xdeadbeef (created) <-- Used in next commands

C9300-PE-2#**show platform software object-manager switch active f0 object 3624 <-- Utilize the aom id value**

Object identifier: 3624
Description: label 0x52
Status: Done, Epoch: 0, Client data: 0x11071668

C9300-PE-2#**show platform software object-manager switch active f0 object 3624 parents <-- Utilize the aom id value**

Object identifier: 496
Description: adj 0x46, Flags None
Status: Done

C9300-PE-2#**show platform software fed switch active mpls forwarding label 17 detail**

LENTRY:label:17 nobj:(LABEL, 82) lentry_hdl:0x44000005
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:1140850693 lbl:17
eos0:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52798]
eos1:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52588]
deagg_vrf_id = 0 lspa_handle:0
LABEL:**objid:82** link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x5f000032
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

```


AAL: id:1593835570 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7fe8f8a93c78, ri_id:0x3a phd1:0x9f00004b, ref_cnt:1
si:0x7fe8f8a91188, si_id:0x4011, di_id:0x535f
ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0xaa000021, }

```

Scenario 2. L3VPN con ECMP tra PE e router IP

Topologia di riferimento

In questo esempio, gli switch Catalyst 3850 funzionano come dispositivi CE, gli switch Catalyst 9300 come dispositivi PE e gli switch Catalyst 9500 in Stackwise Virtual come dispositivi IP. Il protocollo EIGRP viene eseguito tra i dispositivi CE e PE, le adiacenze OSPF e LDP nel core MPLS, con un'adiacenza VPNv4 iBGP tra i dispositivi PE. All'interno del core MPLS, esiste un ECMP tra i dispositivi PE e P.

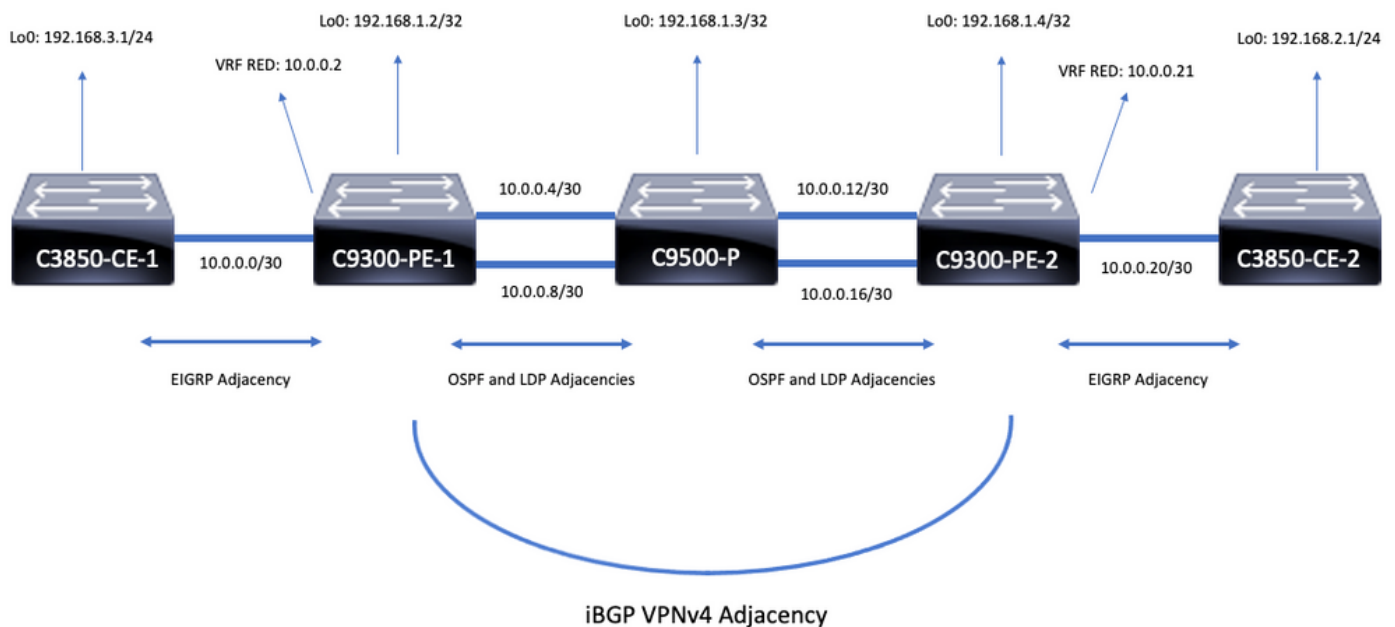

Dettagli configurazione

Configurazione di C3850-CE-1

```

hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2

```

Configurazione di C9300-PE-1


```

hostname C9300-PE-1
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
!
interface GigabitEthernet1/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.2 255.255.255.252
!
interface GigabitEthernet1/0/2
no switchport
ip address 10.0.0.5 255.255.255.252
!
interface GigabitEthernet1/0/3
no switchport
ip address 10.0.0.9 255.255.255.252
!
router eigrp 420
!
address-family ipv4 vrf RED
network 10.0.0.0 0.0.0.3
autonomous-system 420
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.4 remote-as 69420
neighbor 192.168.1.4 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.4 activate
neighbor 192.168.1.4 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 420
exit-address-family

```

Configurazione di C9500-P

```

hostname C9500-P
!
interface Loopback0
ip address 192.168.1.3 255.255.255.255
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.6 255.255.255.252
!
interface TenGigabitEthernet1/0/2

```

```
no switchport
ip address 10.0.0.13 255.255.255.252
!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.10 255.255.255.252
!
interface TenGigabitEthernet2/0/2
no switchport
ip address 10.0.0.17 255.255.255.252
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
```

Configurazione di C9300-PE-2

```
hostname C9300-PE-2
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
interface GigabitEthernet2/0/3
no switchport
ip address 10.0.0.18 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
passive-interface GigabitEthernet2/0/24
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
```

```
!  
address-family ipv4 vrf RED  
redistribute eigrp 400  
exit-address-family
```

Configurazione di C3850-CE-2

```
hostname C3850-CE-2  
!  
interface Loopback0  
ip address 192.168.2.1 255.255.255.0  
!  
interface TenGigabitEthernet2/0/1  
no switchport  
ip address 10.0.0.22 255.255.255.252  
!  
router eigrp 400  
network 10.0.0.20 0.0.0.3  
network 192.168.2.0  
eigrp stub connected summary  
!  
ip route 0.0.0.0 0.0.0.0 10.0.0.21
```

Convalida di base

Prima della convalida della programmazione MPLS è necessario convalidare alcuni requisiti di base:

- Convalida presenza connettività da PE a PE
- Convalida del percorso con cambio di etichetta (LSP) tra i PE
- Convalida adiacenza BGPv4 tra PE
- Convalida etichette VPNv4 e LDP
- Convalida tabella di inoltro MPLS

Convalida connettività da PE a PE

È possibile eseguire il ping tra il loopback del PE remoto e l'origine dal loopback locale, ma questa operazione non conferma che il percorso LSP (Label Switched Path) di MPLS sia valido, poiché gli indirizzi IP di loopback vengono annunciati nell'immagine sottostante.

Nota: l'adiacenza da PE a MP-BGP VPNv4 viene raggiunta tramite le rispettive interfacce Loopback0.

```
C9300-PE-1#ping 192.168.1.4 source 192.168.1.2  
Type escape sequence to abort.  
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:  
Packet sent with a source address of 192.168.1.2  
!!!!!  
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms  
  
C9300-PE-1#show ip route 192.168.1.4  
Routing entry for 192.168.1.4/32  
Known via "ospf 420", distance 110, metric 3, type intra area  
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 18:39:30 ago  
Routing Descriptor Blocks:  
 10.0.0.10, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/3  
    Route metric is 3, traffic share count is 1
```

* 10.0.0.6, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/2
Route metric is 3, traffic share count is 1

Convalida provider di servizi di traduzione

È possibile utilizzare un traceroute MPLS da PE a PE per convalidare l'LSP e tutte le etichette LDP MPLS lungo il percorso.

Nota: questo traceroute MPLS impone solo un'etichetta, l'etichetta LDP. Ciò non dimostra che il traffico proveniente dal CE abbia successo, poiché il traffico viene impostato con 2 etichette, l'etichetta VPNv4 (interna) e l'etichetta LDP (esterna).

```
C9300-PE-1#traceroute mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds
```

```
Codes: '!' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0
```

Type escape sequence to abort.

```
0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 7 ms
! 2 10.0.0.18 1 ms
```

Se non si dispone dell'accesso al CE o a un dispositivo dietro il CE e si desidera dimostrare che l'imposizione/disposizione delle etichette VPNv4 e LDP ha esito positivo, è possibile tentare di eseguire il ping dall'interfaccia con interfaccia CE nel VRF su un PE all'altra interfaccia con interfaccia CE nel VRF sul PE remoto.

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:
Packet sent with a source address of 10.0.0.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

Convalida adiacenza VPNv4 BGP tra PE

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
  BGP version 4, remote router ID 192.168.1.4
  BGP state = Established, up for 18:40:49
  Last read 00:00:40, last write 00:00:47, hold time is 180, keepalive interval is 60 seconds
  Neighbor sessions:
    1 active, is not multisession capable (disabled)
  Neighbor capabilities:
    Route refresh: advertised and received(new)
    Four-octets ASN Capability: advertised and received
    Address family IPv4 Unicast: advertised and received
    Address family VPNv4 Unicast: advertised and received
    Enhanced Refresh Capability: advertised and received
    Multisession Capability:
```

```

Stateful switchover support enabled: NO for session 1
Message statistics:
  InQ depth is 0
  OutQ depth is 0

                Sent          Rcvd
Opens:           1            1
Notifications:  0            0
Updates:         4            4
Keepalives:     1237         1233
Route Refresh:  0            0
Total:          1242         1238
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds
<snip>
C9300-PE-2#show bgp vpnv4 unicast all neighbors 192.168.1.2
BGP neighbor is 192.168.1.2, remote AS 69420, internal link
  BGP version 4, remote router ID 192.168.1.2
  BGP state = Established, up for 18:41:36
  Last read 00:00:42, last write 00:00:32, hold time is 180, keepalive interval is 60 seconds
  Neighbor sessions:
    1 active, is not multisession capable (disabled)
  Neighbor capabilities:
    Route refresh: advertised and received(new)
    Four-octets ASN Capability: advertised and received
    Address family IPv4 Unicast: advertised and received
    Address family VPNv4 Unicast: advertised and received
    Enhanced Refresh Capability: advertised and received
    Multisession Capability:
    Stateful switchover support enabled: NO for session 1
  Message statistics:
    InQ depth is 0
    OutQ depth is 0

                Sent          Rcvd
Opens:           1            1
Notifications:  0            0
Updates:         4            4
Keepalives:     1234         1238
Route Refresh:  0            0
Total:          1239         1243
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

```

L'adiacenza VPNv4 PE remota è attiva ed è stato ricevuto un prefisso

```

C9300-PE-1#show bgp vpnv4 unicast all summary
BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:56 Jun 23 2021 UTC (18:41:06.070 ago)

Neighbor      V      AS MsgRcvd MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
192.168.1.4   4      69420   1240   1244     7     0     0 18:41:59         2

```

C9300-PE-2#show bgp vpnv4 unicast all summary

BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:37 Jun 23 2021 UTC (18:41:06.851 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.2	4	69420	1244	1240	7	0	0	18:42:17	2

Verificare quali prefissi vengono scambiati nel VRF specifico

C9300-PE-1#show ip bgp vpnv4 vrf RED

BGP table version is 7, local router ID is 192.168.1.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?
*> 192.168.3.0	10.0.0.1	130816		32768	?

C9300-PE-2#show ip bgp vpnv4 vrf RED

BGP table version is 7, local router ID is 192.168.1.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*> 192.168.2.0	10.0.0.22	130816		32768	?
*>i 192.168.3.0	192.168.1.2	130816	100	0	?

Convalida etichette VPNv4 e LDP

C9300-PE-1#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.2.0	192.168.1.4	nolabel/21 <-- VPNv4 label that is be imposed to reach

192.168.20

192.168.3.0 10.0.0.1 21/nolabel

C9300-PE-1#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "bgp 69420", distance 200, metric 130816, type internal

Last update from 192.168.1.4 18:41:56 ago

Routing Descriptor Blocks:

* 192.168.1.4 (default), from 192.168.1.4, 18:41:56 ago

Route metric is 130816, traffic share count is 1

AS Hops 0

MPLS label: **21** <-- VPNv4 label that matches the previous output

MPLS Flags: MPLS Required

C9300-PE-2#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach 192.168.2.0
192.168.3.0	192.168.1.2	nolabel/21

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 18:45:04 ago

Routing Descriptor Blocks:

* 10.0.0.22, from 10.0.0.22, 18:45:04 ago, via GigabitEthernet2/0/1 <-- **CE-facing interface in the VRF**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

Verificare le etichette LDP utilizzate

C9300-PE-1#show mpls forwarding-table 192.168.1.4

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2
	17	192.168.1.4/32	0		Gi1/0/3	10.0.0.10 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/3

C9300-PE-2#show mpls forwarding-table 192.168.1.2

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0		Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/2
	16	192.168.1.2/32	0		Gi2/0/3	10.0.0.17 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/3

Convalida tabella di inoltro MPLS

```
C9300-PE-1#show mpls forwarding-table
Local   Outgoing Prefix      Bytes Label  Outgoing  Next Hop
Label   Label    or Tunnel Id Switched     interface
16      Pop Label 192.168.1.3/32 0           Gi1/0/2   10.0.0.6
        Pop Label 192.168.1.3/32 0           Gi1/0/3   10.0.0.10
17      Pop Label 10.0.0.16/30   0           Gi1/0/2   10.0.0.6
        Pop Label 10.0.0.16/30   0           Gi1/0/3   10.0.0.10
18      Pop Label 10.0.0.12/30   0           Gi1/0/2   10.0.0.6
        Pop Label 10.0.0.12/30   0           Gi1/0/3   10.0.0.10
19      17        192.168.1.4/32 0           Gi1/0/2   10.0.0.6
        17        192.168.1.4/32 0           Gi1/0/3   10.0.0.10
20      No Label  10.0.0.0/30[V] 630        aggregate/RED
21      No Label  192.168.3.0/24[V] \
        0           Gi1/0/1   10.0.0.1
```

```
C9300-PE-2#show mpls forwarding-table
Local   Outgoing Prefix      Bytes Label  Outgoing  Next Hop
Label   Label    or Tunnel Id Switched     interface
16      Pop Label 192.168.1.3/32 0           Gi2/0/2   10.0.0.13
        Pop Label 192.168.1.3/32 0           Gi2/0/3   10.0.0.17
17      16        192.168.1.2/32 0           Gi2/0/2   10.0.0.13
        16        192.168.1.2/32 0           Gi2/0/3   10.0.0.17
18      Pop Label 10.0.0.4/30    0           Gi2/0/2   10.0.0.13
        Pop Label 10.0.0.4/30    0           Gi2/0/3   10.0.0.17
19      Pop Label 10.0.0.8/30    0           Gi2/0/2   10.0.0.13
        Pop Label 10.0.0.8/30    0           Gi2/0/3   10.0.0.17
20      No Label  10.0.0.20/30[V] 630        aggregate/RED
21      No Label  192.168.2.0/24[V] \
        0           Gi2/0/1   10.0.0.22
```

Confermare le etichette interne (VPNv4) e esterne (LDP) utilizzate per raggiungere ciascun prefisso specificato nel VRF

```
C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail
192.168.2.0/24, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.4 label 21 <-- VPNv4 label
    nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router
    nexthop 10.0.0.10 GigabitEthernet1/0/3 label 17-(local:19)<-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router
```

```
C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail
192.168.3.0/24, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.2 label 21 <-- VPNv4 label
    nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router
    nexthop 10.0.0.17 GigabitEthernet2/0/3 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router
```

Verifica statistiche Object Manager:

Negli scenari ideali, non sono presenti oggetti in sospensione

```
C9300-PE-1#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
```



```
Batch end:      Pending-issue: 0, Pending-acknowledgement: 0
Command:       Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
9500-P#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:       Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:       Pending-acknowledgement: 0
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

Programmazione prefissi

Nella sezione successiva viene illustrata la programmazione dei prefissi sui router MPLS, C9300-PE-1, C9500-P e C9300-PE-2.

Programmazione prefissi C9300-PE-1

Software Prefix Programming

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
  Known via "bgp 69420", distance 200, metric 130816, type internal
```

```
  Last update from 192.168.1.4 19:21:45 ago
```

```
  Routing Descriptor Blocks:
```

```
    * 192.168.1.4 (default), from 192.168.1.4, 19:21:45 ago <-- Remote PE reachable in the global routing table
```

```
      Route metric is 130816, traffic share count is 1
```

```
      AS Hops 0
```

```
      MPLS label: 21 <-- VPNv4 label
```

```
      MPLS Flags: MPLS Required
```

```
C9300-PE-1#show ip route 192.168.1.4
```

```
Routing entry for 192.168.1.4/32
```

```
  Known via "ospf 420", distance 110, metric 3, type intra area
```

```
  Last update from 10.0.0.10 on GigabitEthernet1/0/3, 19:23:17 ago
```

Routing Descriptor Blocks:

10.0.0.10, from 192.168.1.4, 19:23:17 ago, via **GigabitEthernet1/0/3** <-- Next-hop to reach **192.168.1.4**

Route metric is 3, traffic share count is 1

* **10.0.0.6**, from 192.168.1.4, 19:23:17 ago, via **GigabitEthernet1/0/2** <-- Next-hop to reach **192.168.1.4**

Route metric is 3, traffic share count is 1

*****FMAN RP Prefix Programming*****

C9300-PE-1#**show ip vrf detail**

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24** <- - Index value is the VRF ID from previous command

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_LABEL	0x78

C9300-PE-1#**show platform software mpls switch active r0 label index 0x78** <-- Utilize the Index value from previous command

Label OCE 0x78 -> OBJ_LOADBALANCE (0x70) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1

Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x3480644d88

C9300-PE-1#**show platform software loadinfo switch active r0 index 0x70** <-- Utilize the OBJ_LOADBALANCE value from previous command

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16

Anti-polarising Factor: 0xf4a19ba0

Next Object Type: OBJ_LABEL, OBJ_LABEL

Next obj handle: 0x6e, 0x6f

Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1

Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0

OM handle: 0x3480641fb8

C9300-PE-1#**show platform software mpls switch active r0 label index 0x6e** <-- Utilize the obj handle value from previous command

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34806420d0

C9300-PE-1#show platform software mpls switch active r0 label index 0x6f <-- Utilize the obj handle value from previous command

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480642268

C9300-PE-1#show platform software adjacency switch active r0 index 0x4b <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4b (75)
Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x34806375f8

C9300-PE-1#show platform software adjacency switch active r0 index 0x4e <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4e (78)
Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47 <-- MAC ending DDC2 is the DMAC, MAC ending in D1D8 is the SMAC, 8847 is the MPLS ETPYE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.10 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480638200

FMAN FP Prefix Programming

C9300-PE-1#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gil/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map
VRF label distribution protocol: not configured
VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail <-- Index value is the VRF ID from previous command**

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x78), urpf: 118
Prefix Flags: unknown
aom id: 618, HW handle: (nil) (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x78 <-- Use the OBJ_LABEL value from previous command**

Label OCE 0x78 -> OBJ_LOADBALANCE (0x70)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
aom id: 617, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software object-manager switch active f0 object 617 parents <-- Use the aom id from previous command**

Object identifier: 600
Description: LB 0x70
Status: Done

C9300-PE-1#**show platform software loadinfo switch active f0 index 0x70 <-- Use the LB value from previous command**

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0xf4a19ba0
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: 0x6e, 0x6f
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
aom id: 600, HW handle: (nil)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x6e <-- Use the obj handle values from previous commands**

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x6f <-- Use the obj handle values from previous command**

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software adjacency switch active f0 index 0x4b <-- Use the OBJ_ADJACENCY value from previous command**

Number of adjacency objects: 10

Adjacency id: 0x4b (75)
Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 531, HW handle: (nil) (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x4e <-- Use the
OBJ_ADJACENCY value from previous command
Number of adjacency objects: 10

Adjacency id: 0x4e (78)
Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.10
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 535, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-1#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
---	----	---	-----	---	----	-----	-----
2	192.168.2.0/24	0x7fbae8d86228	0x0	0	0	lspa0x2	

2021/06/23 18:50:13.079 <-- HTM value significant for next command
FIB: prefix_hdl:0x50000026, mpls_ecr_prefix_hdl:0
===== OCE chain =====
LABEL:objid:120 link_type:IP local_label:1048577 outlabel:(21, 0) <-- VPNv4 label
flags:0x1:(REAL,) pdflags:0x80:(INSTALL_HW_OK,RECIR_ADJ,) adj_handle:0xcb00003c <--
adj_handle and local_adj_hdl values must match
unsupported recursion:0 olbl_changed 0 local_adj:1 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3405774908 lbl:19 smac:0000.0000.0000 dmac:0000.0000.0000 <-- Label 19 matches the
local transport label
sub_type:0 link_type:0 adj_flags:0x10 label_type:0 rewrite_type:PSH2(121)
vlan_id:0 vrf_id:0 ri:0x7fbae8d73648, ri_id:0x46 phdl:0, ref_cnt:2 <-- ri_id and
ri_idx values must match
si:0x7fbae8d834d8, si_id:0xb6, di_id:0x5013
LB:obj_id:112 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)
hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48
Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1744830509
sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)
adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]
ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0
group_label:0x0 group_mask:0x0

=====

C9300-PE-1#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x535f 0x535f** <-- Utilize the di_id from the previous command
ASIC#0:

index = 0x535f
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x535f
pmap = 0x00000000 **0x00000002** <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9300-PE-1#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x5360 0x5360** <-- Utilize the di_id from the previous command
ASIC#0:

index = 0x5360
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

```

index = 0x5360
pmap = 0x00000000 0x00000004 <-- Looking at 0x00000004, in binary that is 0000 0000 0000 0000
0000 0000 0000 0100 = Port 2 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

```

C9300-PE-1#show platform software fed switch active ifm map
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet1/0/2  0x36      1  0  1  1  0  6  7  2  2  NIF  Y <--
Port 1 is an egress port, Gi1/0/2
GigabitEthernet1/0/3  0x37      1  0  1  2  0  28  8  3  3  NIF  Y <--
Port 2 is an egress port, Gi1/0/3

```

Programmazione prefissi C9500

Software Prefix Programming

```

C9500-P#show ip route 192.168.1.4
Routing entry for 192.168.1.4/32
  Known via "ospf 420", distance 110, metric 2, type intra area
  Last update from 10.0.0.18 on TenGigabitEthernet2/0/2, 20:15:25 ago
  Routing Descriptor Blocks:
    10.0.0.18, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet2/0/2 <-- Next-hop towards
192.168.1.4
      Route metric is 2, traffic share count is 1
    * 10.0.0.14, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet1/0/2 <-- Next-hop towards
192.168.1.4
      Route metric is 2, traffic share count is 1

```

C9500-P#show ip cef 192.168.1.4 detail

```

192.168.1.4/32, epoch 4, per-destination sharing
  dflt local label info: global/17 [0x3]
  nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4
  nexthop 10.0.0.18 TenGigabitEthernet2/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4

```

FMAN RP Prefix Programming

```
C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32
```

Forwarding Table

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LOADBALANCE	0x6a

```
C9500-P#show platform software loadinfo switch active r0 index 0x6a <-- Use the OBJ_LOADBALANCE value from previous command
```

Number of loadinfo objects: 4

```

Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0x57a70068

```


Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: **0x68, 0x69**
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
OM handle: 0x348064de58

C9500-P#**show platform software mpls switch active r0 label index 0x68** <-- Use the obj handle values from the previous command

Label OCE 0x68 -> OBJ_ADJACENCY (**0x49**)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064df70

C9500-P#**show platform software mpls switch active r0 label index 0x69**

Label OCE 0x69 -> OBJ_ADJACENCY (**0x4e**)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

C9500-P#**show platform software adjacency switch active r0 index 0x49** <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending is B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.14** <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480647700

C9500-P#**show platform software adjacency switch active r0 index 0x4e** <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)
Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47** <-- MAC ending in AE61 is DMAC, MAC ending in B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.18** <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480648f68

FMAN FP Prefix Programming

C9500-P#**show platform software ip switch active f0 cef prefix 192.168.1.4/32**
Forwarding Table

Prefix/Len	Next Object	Index
-----	-----	-----
192.168.1.4/32	OBJ_LOADBALANCE	0x6a

C9500-P#show platform software loadinfo switch active f0 index 0x6a <-- Use the OBJ_LOADBALANCE value from previous command

Number of loadinfo objects: 4

Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0x57a70068
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: 0x68, 0x69
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
aom id: 578, HW handle: (nil)

C9500-P#show platform software mpls switch active f0 label index 0x68 <-- Use the obj handle values from previous command

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 0x69 <-- Use the obj handle values from previous command

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software adjacency switch active f0 index 0x49 <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.14 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 536, HW handle: (nil) (created)

C9500-P#show platform software adjacency switch active f0 index 0x4e <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)
Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47 <-- MAC ending in AE61 is the DMAC, MAC ending in DDF1 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None

Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.18 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 545, HW handle: (nil) (created)

FED Prefix Programming

C9500-P#show platform software fed switch active ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

0 192.168.1.4/32 0x7f0b284c1118 0x0 0 0

2021/06/23 18:47:01.761 <-- HTM value important for subsequent command

FIB: prefix_hdl:0x9b000020, mpls_ecr_prefix_hdl:0xdd00003a
===== OCE chain =====

LB:obj_id:106 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78

Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1207959601

sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)

adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]

ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:67108914

sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)

adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]

ecr_prefix_adj: id:3707764794 (ref:1)

sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)

LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label, 0 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-hop information to reach 192.168.1.4/32

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1

si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2 <-- Used in subsequent commands

ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }

LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label, 0 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches the next-hop information to reach 192.168.1.4/32

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1

si:0x7f0b284d0548, si_id:0x400c, di_id:0x62 <-- Used in subsequent commands

ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }

=====

MPLS info: mpls_ecr_scale_prefix_adj:0xdd00003a, mpls_lspa_hdl:0

=====

C9500-P#show platform hardware fed switch active fwd-asic abstraction print-resource-handle

0x7f0b284c1118 1 <-- Use the HTM value from previous command

Handle:0x7f0b284c1118 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-

ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_rri/priv_sri Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0b284c1328
Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f0b284c1328)

Absolute Index: 126650

Time Stamp: 1

KEY - vrf:0 mtr:0 **prefix:192.168.1.4** rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 **prefix:0.0.0.0** rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:184 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:2 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:1

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

**C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x2 0x2 <-- Use the di_id values from previous command**

ASIC#0:

index = 0x2

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x2

pmap = 0x00000000 **0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000**

0000 0000 0000 0010 = Port 1 (Zero based, count right to left)

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0
copySeg = 0

C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x62 0x62

ASIC#0:

index = 0x62
pmap = 0x00000000 0x00008000 <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000 1000 0000 0000 0000 = Port 15 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x62
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9500-P#show platform software fed switch standby ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
0	192.168.1.4/32	0x7f57c0545938	0x0	0	0		

2021/06/23 18:46:51.399 <-- HTM value used in subsequent command

FIB: prefix_hdl:0x29000020, mpls_ecr_prefix_hdl:0x8f000039

=====
OCE chain

LB:obj_id:106 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xf1000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:4043309058 af:0 ecr_type:0 ref:2 ecrh:0x7f57c04d2148(28:2)

hwhdl:3226280264 ::0x7f57c0547538,0x7f57c05497d8,0x7f57c0547538,0x7f57c05497d8

Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0xf1000002 ecr_hwhdl:0x7f57c04d2148

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:201326647 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:3925868592

sih:0x7f57c0547538(181) di_id:23717 rih:0x7f57c0546f18(31)

adj_lentry [eos0:0x7f57c04c8a08 eos1:0x7f57c04d07f8]

ecr_adj: id:738197560 is_mpls_adj:1 l3adj_flags:0x100000

```
recirc_adj_id:3070230577
  sih:0x7f57c05497d8(182) di_id:23717 rih:0x7f57c0547838(44)
  adj_lentry [eos0:0x7f57c04c8c18 eos1:0x7f57c04d0ac8]
ecr_prefix_adj: id:2399141945 (ref:1)
  sih:0x7f57c04c8788(184) di_id:23717 rih:0x7f57c04c8508(60)
LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc000037
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:201326647 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches next-hop
information to reach 192.168.1.4/32
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f57c04d18e8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
  si:0x7f57c04d1b18, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent
```

commands

```
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0xdf000027, }
LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x2c000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:738197560 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches next-hop
information to reach 192.168.1.4/32
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f57c04da418, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
  si:0x7f57c04da838, si_id:0x400c, di_id:0x62 <-- di_id utilized in subsequent
```

commands

```
ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0xfa000029, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0x8f000039, mpls_lspa_hdl:0
=====
```

C9500-P#show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x62 0x62

ASIC#0:

```
index = 0x62
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x62
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
```

cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9500-P#show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x2 0x2

ASIC#0:

index = 0x2
pmap = 0x00000000 0x00008000 <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000 1000 0000 0000 0000 = Port 15 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x2
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9500-P#show platform software fed switch active ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet1/0/2	0x42	1	0	1	1	0	10	1	2	2	NIF	Y <--
Port 1 is an egres port, TenGi1/0/2												
TenGigabitEthernet1/0/16	0x18	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

C9500-P#show platform software fed switch standby ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet2/0/2	0x44	1	0	1	1	0	10	1	2	98	NIF	Y <--
Port 1 is an egres port, TenGi2/0/2												
TenGigabitEthernet2/0/16	0x33	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

Verifica dei prefissi C9300-PE-2

Software Prefix Programming

C9300-PE-2#show ip route vrf RED 192.168.2.0

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 21:35:22 ago

Routing Descriptor Blocks:

* **10.0.0.22**, from 10.0.0.22, 21:35:22 ago, via GigabitEthernet2/0/1 <-- **Next-hop to reach 192.168.2.0/24**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

C9300-PE-2#show ip route vrf RED 10.0.0.22

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Routing Descriptor Blocks:

* directly connected, via GigabitEthernet2/0/1

Route metric is 0, traffic share count is 1

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- **VPNv4 Label**

nexthop 10.0.0.22 GigabitEthernet2/0/1

*****FMAN RP Prefix Programming*****

C9300-PE-2#show ip vrf detail

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID <-- **VRF ID used in next command**

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi2/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-2#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <-
- Use the VRF ID from previous command

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

C9300-PE-2#show platform software adjacency switch active r0 index 0x3a <-- Use the
OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10


```

Adjacency id: 0x3a (58)
  Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP
  Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending
in AE42 is SMAC, 0800 is IP ETYPE
  Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
  Flags: no-l3-inject
  Incomplete behavior type: None
  Fixup: unknown
  Fixup_Flags_2: unknown
  Nexthop addr: 10.0.0.22 <-- Next-hop IP address
  IP FRR MCP_ADJ_IPFRR_NONE 0
  OM handle: 0x348062b578

```

*****FMAN FP Prefix Programming*****

```

C9300-PE-2#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24
Forwarding Table

```

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

```

C9300-PE-2#show platform software adjacency switch active f0 index 0x3a <-- Use the
OBJ_ADJACENCY value from previous command
Number of adjacency objects: 10

```

```

Adjacency id: 0x3a (58)
  Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP
  Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending
in AE42 is SMAC, 0800 is IP ETYPE
  Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
  Flags: no-l3-inject
  Incomplete behavior type: None
  Fixup: unknown
  Fixup_Flags_2: unknown
  Nexthop addr: 10.0.0.22 <-- Next-hop IP address
  IP FRR MCP_ADJ_IPFRR_NONE 0
  aom id: 477, HW handle: (nil) (created)

```

*****FED Prefix Programming*****

```

C9300-PE-2#show platform hardware fed switch active ip route vrf-name RED 192.168.2.0/24
vrf  dest                htm          flags  SGT  DGID MPLS Last-
modified
---  ----                ---          -----  ---  ----  -----
-----
2    192.168.2.0/24        0x7f0650a7e3e8  0x0    0    0
2021/06/23 18:46:56.801 <-- HTM value used in subsequent command
  FIB: prefix_hdl:0x38000016, mpls_ecr_prefix_hdl:0
  ===== OCE chain =====
  ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4:      10.0.0.22 } <-- objid
relevant in subsequent command, 10.0.0.22 is the next-hop IP
  =====
  MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lsps_hdl:0
  =====

```

```

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f0650a7e3e8 1 <-- Use the HTM value from previous command
Handle:0x7f0650a7e3e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0650ba4028

```

```

Detailed Resource Information (ASIC# 0)
-----
Number of HTM Entries: 1

```

Entry 0: (handle 0x7f0650ba4028)

Absolute Index: 92180

Time Stamp: 1

KEY - vrf:2 mtr:0 **prefix:192.168.2.0** rcp_redirect_index:0x0

MASK - vrf:255 mtr:0 **prefix:255.255.255.0** rcp_redirect_index:0x0

(SI value used later)

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 **SI:173** destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:1 need_to_learn:1 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9300-PE-2#show platform software fed switch active ip adj

IPV4 Adj entries

dest	if_name	dst_mac	si_hdl	ri_hdl	pd_flags
adj_id	Last-modified				
----	-----	-----	-----	-----	-----
10.0.0.22	GigabitEthernet2/0/1	0072.78c8.c9c2	0x7f0650a32858	0x7f0650a1af48	0x0
0x3a	2021/06/23 18:46:52.956				

C9300-PE-2#show ip arp vrf RED 10.0.0.22

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.0.0.22	131	0072.78c8.c9c2	ARPA	GigabitEthernet2/0/1

matches the ARP entry

C9300-PE-2#show platform hardware fed fwd-asic abstraction print-resource-handle 0x7f0650a32858 1 <-- Use the HTM value from previous command

Handle:0x7f0650a32858 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1

priv_ri/priv_si Handle: 0x7f0650a1af48Hardware Indices/Handles: index0:0xad

mtu_index/l3u_ri_index0:0x0 index1:0xad mtu_index/l3u_ri_index1:0x0

Features sharing this resource:66 (1)]

Cookie length: 56

00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00

00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xad]

RI = 0x18

DI = **0x5338**

stationTableGenericLabel = 0

stationFdConstructionLabel = 0x7

lookupSkipIdIndex = 0

rcpServiceId = 0

dejaVuPreCheckEn = 0

Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

```

Station Index (SI) [0xad]
RI = 0x18
DI = 0x5338
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD

```

=====

```

C9300-PE-2#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x5338 0x5338 <-- Use the DI value from previous command

```

```
ASIC#0:
```

```

index = 0x5338
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

```

```

index = 0x5338
pmap = 0x00000000 0x00000001 <-- Looking at 0x00000001, in binary that is 0000 0000 0000 0000
0000 0000 0000 0001 = Port 0 (Zero based, count right to left)

```

```

cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

```
C9300-PE-2#show platform software fed switch active ifm mappings
```

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
GigabitEthernet2/0/1	0x35	1	0	1	0	0	26	6	1	97	NIF	Y

- Port 0 is the egress port, Gi2/0/1

VPNv4 Label Programming

La sezione successiva tratta della programmazione delle etichette VPNv4 sui router MPLS PE, C9300-PE-1 e C9300-PE-2. C9500=P non esegue l'inoltro sull'etichetta VPNv4, quindi non viene generato alcun output da C9500-P.

C9300-PE-1 VPNv4 Label Programming:

Controllare il prefisso locale del PE, non il prefisso remoto. Controllare l'etichetta da una prospettiva FED, quindi tornare a FMAN RP e FMAN FP.

Software VPNv4 Label Programming

```
C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail
192.168.3.0/24, epoch 0
  QOS: Precedence routine (0)
  dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix
  nexthop 10.0.0.1 GigabitEthernet1/0/1
```

FMAN RP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active r0 eos index 117 <-- Utilize the objid from
the FED command
```

```
EOS Choice 0x75, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x74
  OM handle: 0x3480644470
```

FMAN FP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active f0 eos index 117 <-- Utilize the objid from
the FED command
```

```
EOS Choice 0x75, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x74
  aom id: 612, CPP handle: 0xdeadbeef (created), flags: 0
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 612 <-- Use the aom id
from previous command
```

```
Object identifier: 612
  Description: EOS Choice 0x75
  Status: Done, Epoch: 0, Client data: 0xe05e9318
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 612 parents <-- Use the
aom id from previous command
```

```
Object identifier: 7
  Description: Special Object adj_drop
  Status: Done
```

```
Object identifier: 611
  Description: label 0x74
  Status: Done
```

FED VPNv4 Label Programming

```
C9300-PE-1#show platform software fed switch active mpls forwarding label 21 detail
LENTRY:label:21 nobj:(EOS, 117) lentry_hdl:0x8b000009
  modify_cnt:0 backwalk_cnt:0
  lsp_handle:0
  AAL: id:2332033033 lbl:21
    eos0:[adj_hdl:0, hw_hdl:0x7fbae8d87428]
    eos1:[adj_hdl:0x4300003b, hw_hdl:0x7fbae8d87278]
    deagg_vrf_id = 0 lsp_handle:0
  EOS:objid:117 local_label:0 flags:0:( ) pdflags:0 <-- Utilized in previous commands
  nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 116) modify:0 bwalk:0
  LABEL:objid:116 link_type:IP local_label:21 outlabel:(1048577, 0)
    flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x4300003b
```

```
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1124073531 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4
sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
vlan_id:0 vrf_id:0 ri:0x7fbae8d811b8, ri_id:0x3e phdl:0xf1000024, ref_cnt:1
si:0x7fbae8d72078, si_id:0x4012, di_id:0x5338
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x1900001b, IPv4: 10.0.0.1 }
```

Verifica delle etichette VPNv4 per C9300-PE-2

Controllare il prefisso locale del PE, non il prefisso remoto. Controllare l'etichetta da una prospettiva FED, quindi tornare a FMAN RP e FMAN FP.

```
C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail
```

```
192.168.2.0/24, epoch 0
QOS: Precedence routine (0)
dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix
nexthop 10.0.0.22 GigabitEthernet2/0/1
```

```
C9300-PE-2#show platform software mpls switch active r0 eos index 118 <-- Utilize the objid
value from the FED command
```

```
EOS Choice 0x76, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x75
OM handle: 0x34806402d0
```

```
C9300-PE-2#show platform software mpls switch active f0 eos index 118 <-- Utilize the objid
value from the FED command
```

```
EOS Choice 0x76, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x75
aom id: 589, CPP handle: 0xdeadbeef (created), flags: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 object 589 <-- Utilize the aom
id from the previous command
```

```
Object identifier: 589
Description: EOS Choice 0x76
Status: Done, Epoch: 0, Client data: 0x248cac8
```

```
C9300-PE-2#show platform software object-manager switch active f0 object 589 parents <-- Utilize
the aom id from the previous command
```

```
Object identifier: 7
Description: Special Object adj_drop
Status: Done
```

```
Object identifier: 588
Description: label 0x75
Status: Done
```

```
C9300-PE-2#show platform software fed switch active mpls forwarding label 21 detail
```

```
LENTRY:label:21 nobj:(EOS, 118) lentry_hdl:0x63000009
modify_cnt:0 backwalk_cnt:0
lspa_handle:0
AAL: id:1660944393 lbl:21
eos0:[adj_hdl:0, hw_hdl:0x7f0650a40408]
eos1:[adj_hdl:0xcb00003a, hw_hdl:0x7f0650a401f8]
```

```

deagg_vrf_id = 0 lspc_handle:0
EOS:objid:118 local_label:0 flags:0:( ) pdflags:0
nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 117) modify:0 bwalk:0
LABEL:objid:117 link_type:IP local_label:21 outlabel:(1048577, 0)
flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0xcb00003a
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3405774906 lbl:0 smac:70d3.79be.ae42 dmac:0072.78c8.c9c2
sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
vlan_id:0 vrf_id:0 ri:0x7f0650a3f2a8, ri_id:0x48 phdl:0xf1000024, ref_cnt:1
si:0x7f0650a3d5e8, si_id:0x400a, di_id:0x5338
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4:      10.0.0.22 }

```

LDP Label Programming

Nella sezione successiva viene illustrata la programmazione delle etichette LDP sui router MPLS, C9300-PE-1, C9500-P e C9300-PE-2.

L'etichetta LDP (router) è l'etichetta della rete MPLS su cui i pacchetti vengono commutati. Convalidare l'etichetta LDP locale annunciata al PE remoto. Non convalidare l'etichetta LDP remota.

C9300-PE-1 LDP Label Programming:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Controllare l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

Software LDP Label Programming

C9300-PE-1#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi1/0/2	10.0.0.6
	Pop Label	192.168.1.3/32	0	Gi1/0/3	10.0.0.10
17	Pop Label	10.0.0.16/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.16/30	0	Gi1/0/3	10.0.0.10
18	Pop Label	10.0.0.12/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.12/30	0	Gi1/0/3	10.0.0.10
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6 <-- LDP label 19 is advertised to reach PE 192.168.1.4
	17	192.168.1.4/32	0	Gi1/0/3	10.0.0.10
20	No Label	10.0.0.0/30[V]	630	aggregate/RED	
21	No Label	192.168.3.0/24[V]	\		
			0	Gi1/0/1	10.0.0.1

FMAN RP LDP Label Programming

C9300-PE-1#show platform software mpls switch active r0 label index 110 <-- Use the objid value from the FED commands

```

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34806420d0

```

C9300-PE-1#show platform software mpls switch active r0 label index 111 <-- Use the objid value from the FED commands

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480642268

*****FMAN FP LDP Label Programming*****

C9300-PE-1#show platform software mpls switch active f0 label index 110 <-- Use the objid value from the FED commands

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software mpls switch active f0 label index 111 <-- Use the objid value from the FED commands

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software object-manager switch active f0 object 598 <-- Utilize the aom id from previous commands

Object identifier: 598
Description: label 0x6e
Status: Done, Epoch: 0, Client data: 0xe05e6d78

C9300-PE-1#show platform software object-manager switch active f0 object 598 parents <-- Utilize the aom id from previous commands

Object identifier: 531
Description: adj 0x4b, Flags None
Status: Done

C9300-PE-1#show platform software object-manager switch active f0 object 599 <-- Utilize the aom id from previous commands

Object identifier: 599
Description: label 0x6f
Status: Done, Epoch: 0, Client data: 0xe05e6f78

C9300-PE-1#show platform software object-manager switch active f0 object 599 parents <-- Utilize the aom id from previous commands

Object identifier: 535
Description: adj 0x4e, Flags None
Status: Done

C9300-PE-1#show platform software fed switch active mpls forwarding label 19 detail

LENTRY:label:19 nobj:(LB, 112) lentry_hdl:0x9000007
modify_cnt:1 backwalk_cnt:0
lspa_handle:0
AAL: id:150994951 lbl:19
eos0:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d778b8]
eos1:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d776a8]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:112 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0

```

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)
hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48
Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:1744830509
    sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)
    adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]
ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:2013265966
    sih:0x7fbae8a9ad48(180) di_id:20499 rih:0x7fbae8a9a788(46)
    adj_lentry [eos0:0x7fbae8d7c1b8 eos1:0x7fbae8d77158]
ecr_prefix_adj: id:2164260921 (ref:1)
  sih:0x7fbae8d7df08(181) di_id:20499 rih:0x7fbae8d7db98(68)
LABEL:objid:110 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous

```

commands

```

flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xff000037
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:4278190135 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7fbae8d78c48, ri_id:0x40 phdl:0x9f00004b, ref_cnt:1
  si:0x7fbae8d78fd8, si_id:0x4013, di_id:0x535f
ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x22000023, }
LABEL:objid:111 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous

```

commands

```

flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0x53000038
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1392508984 lbl:0 smac:a0f8.4911.d1d8 dmac:d4ad.71b5.ddc2
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7fbae8d7d0a8, ri_id:0x42 phdl:0x8400004c, ref_cnt:1
  si:0x7fbae8d7a908, si_id:0x4014, di_id:0x5360
ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0x74000026, }

```

C9500-P LDP Label Programming:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Controllare l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

*****Software LDP Label Programming*****

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	1240	Te1/0/1	10.0.0.5 <-- LDP Label 16
advertised to reach PE 192.168.1.2					
	explicit-n	192.168.1.2/32	226537	Te2/0/1	10.0.0.9
17	explicit-n	192.168.1.4/32	610	Te1/0/2	10.0.0.14 <-- LDP Label 17
advertised to reach PE 192.168.1.4					
	explicit-n	192.168.1.4/32	227592	Te2/0/2	10.0.0.18

*****FMAN RP LDP Label Programming*****

C9500-P#show platform software mpls switch active r0 label index 94

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)

Flags: Real, Number of labels in the OCE: 1

Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064c530

C9500-P#show platform software mpls switch active r0 label index 95

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064c6c8

C9500-P#show platform software mpls switch active r0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064df70

C9500-P#show platform software mpls switch active r0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

*****FMAN FP LDP Label Programming*****

C9500-P#show platform software mpls switch active f0 label index 94

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 564, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 95

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 565, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1

Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 564

Object identifier: 564
Description: label 0x5e
Status: Done, Epoch: 0, Client data: 0x4f737108

C9500-P#show platform software object-manager switch active f0 object 564 parents

Object identifier: 515
Description: adj 0x3f, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 565

Object identifier: 565
Description: label 0x5f
Status: Done, Epoch: 0, Client data: 0x4f737448

C9500-P#show platform software object-manager switch active f0 object 565 parents

Object identifier: 525
Description: adj 0x44, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 576

Object identifier: 576
Description: label 0x68
Status: Done, Epoch: 0, Client data: 0x4f6d4bf8

C9500-P#show platform software object-manager switch active f0 object 576 parents

Object identifier: 536
Description: adj 0x49, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 577

Object identifier: 577
Description: label 0x69
Status: Done, Epoch: 0, Client data: 0x4f737f78

C9500-P#show platform software object-manager switch active f0 object 577 parents

Object identifier: 545
Description: adj 0x4e, Flags None
Status: Done

*****FED LDP Label Programming*****

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LB, 96) lentry_hdl:0xeb000004
modify_cnt:2 backwalk_cnt:0
lspa_handle:0
AAL: id:3942645764 lbl:16
eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4d98]
eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4be8]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:96 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:16 path_inhw:2 ecrh:0x44000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
Sw Enh ECR scale: objid:96 llabel:16 eos:1 #adjs:2 mixed_adj:0

```

reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:1610612787 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:1207959601
    sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
    adj_lentry [eos0:0x7f0b284a32d8 eos1:0x7f0b284a3cc8]
ecr_adj: id:805306420 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:67108914
    sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
    adj_lentry [eos0:0x7f0b284c1608 eos1:0x7f0b284a2138]
ecr_prefix_adj: id:3976200245 (ref:1)
  sih:0x7f0b284c2bf8(183) di_id:23709 rih:0x7f0b284c2888(50)
LABEL:objid:94 link_type:MPLS local_label:16 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x60000033
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:1610612787 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284a2cd8, ri_id:0x2e phdl:0xe9000057, ref_cnt:1
    si:0x7f0b284a3048, si_id:0x4009, di_id:0x1
  ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x2d000023, }
LABEL:objid:95 link_type:MPLS local_label:16 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x30000034
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:805306420 lbl:0 smac:d4ad.71b5.ddc2 dmac:a0f8.4911.d1d8
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284a57c8, ri_id:0x30 phdl:0x67000059, ref_cnt:1
    si:0x7f0b284a6008, si_id:0x400a, di_id:0x61
  ADJ:objid:68 {link_type:MPLS ifnum:0x43, si:0xef000026, }

```

C9500-P#**show platform software fed switch active mpls forwarding label 17 detail**

```

LENTRY:label:17 nobj:(LB, 106) lentry_hdl:0xf6000005
  modify_cnt:1 backwalk_cnt:0
  lsp_handle:0
  AAL: id:4127195141 lbl:17
    eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce2f8]
    eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce0e8]
    deagg_vrf_id = 0 lsp_handle:0
  LB:obj_id:106 link_type:IP num_choices:2 Flags:0
    mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0
    modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
    bwalk:[req:0 in_prog:0 nested:0]
  AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
  hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
  Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0
  reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
  mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
  ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:1207959601
      sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
      adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]
  ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:67108914
      sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
      adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]
  ecr_prefix_adj: id:3707764794 (ref:1)
    sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)
LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

```

```

vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }
LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0)
flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
si:0x7f0b284d0548, si_id:0x400c, di_id:0x62
ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }

```

C9300-PE-2 LDP Label Programming:

Convalida l'etichetta LDP locale annunciata al server PE remoto. Non convalidare l'etichetta LDP remota. Iniziare controllando l'etichetta da una prospettiva FED e poi tornare indietro a FMAN RP e FMAN FP.

Software LDP Label Programming

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0	Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	0	Gi2/0/2	10.0.0.13 <-- LDP Label 17 is advertised to Remote PE 192.168.1.2
	16	192.168.1.2/32	0	Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0	Gi2/0/3	10.0.0.17
19	Pop Label	10.0.0.8/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.8/30	0	Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	630	aggregate/RED	
21	No Label	192.168.2.0/24[V] \	0	Gi2/0/1	10.0.0.22

FMAN RP Label Programming

C9300-PE-2#show platform software mpls switch active r0 label index 106 <-- Use the objid values from the FED commands

```

Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480637358

```

C9300-PE-2#show platform software mpls switch active r0 label index 107 <-- Use the objid values from the FED commands

```

Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480638c10

```

FMAN FP LDP Label Programming

C9300-PE-2#show platform software mpls switch active f0 label index 106

Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 548, CPP handle: 0xdeadbeef (created)

C9300-PE-2#show platform software mpls switch active f0 label index 107

Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 549, CPP handle: 0xdeadbeef (created)

C9300-PE-2#show platform software object-manager switch active f0 object 548 <-- Use the aom id value from the previous commands

Object identifier: 548
Description: label 0x6a
Status: Done, Epoch: 0, Client data: 0x24843d8

C9300-PE-2#show platform software object-manager switch active f0 object 548 parents <-- Use the aom id value from the previous commands

Object identifier: 509
Description: adj 0x4b, Flags None
Status: Done

C9300-PE-2#show platform software object-manager switch active f0 object 549 <-- Use the aom id value from the previous commands

Object identifier: 549
Description: label 0x6b
Status: Done, Epoch: 0, Client data: 0x2484518

C9300-PE-2#show platform software object-manager switch active f0 object 549 parents <-- Use the aom id value from the previous commands

Object identifier: 513
Description: adj 0x4e, Flags None
Status: Done

*****FED LDP Label Programming*****

C9300-PE-2#show platform software fed switch active mpls forwarding label 17 detail

LENTRY:label:17 nobj:(LB, 108) lentry_hdl:0x64000005
modify_cnt:1 backwalk_cnt:0
lspa_handle:0
AAL: id:1677721605 lbl:17
eos0:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5c8e8]
eos1:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5b908]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:108 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xa0000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2684354562 af:0 ecr_type:0 ref:7 ecrh:0x7f0650a62888(28:2)
hwhdl:1353066632 ::0x7f0650a60998,0x7f0650a630d8,0x7f0650a60998,0x7f0650a630d8
Sw Enh ECR scale: objid:108 llabel:17 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0xa0000002 ecr_hwhdl:0x7f0650a62888
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:436207667 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:2113929262
sih:0x7f0650a60998(178) di_id:20507 rih:0x7f0650a60378(50)
adj_lentry [eos0:0x7f0650a877d8 eos1:0x7f0650a1cf78]
ecr_adj: id:3976200246 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1509949487

```

    sih:0x7f0650a630d8(179) di_id:20507 rih:0x7f0650a62b18(51)
    adj_lentry [eos0:0x7f0650a87a48 eos1:0x7f0650a1d188]
    ecr_prefix_adj: id:2919235640 (ref:1)
    sih:0x7f0650a87558(180) di_id:20507 rih:0x7f0650a871d8(68)
    LABEL:objid:106 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous
commands
    flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0x1a000033
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:436207667 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6
        sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
        vlan_id:0 vrf_id:0 ri:0x7f0650a67d48, ri_id:0x3a phd1:0x9f00004b, ref_cnt:1
        si:0x7f0650a65408, si_id:0x4010, di_id:0x535f
    ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x35000023, }
    LABEL:objid:107 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous
commands
    flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xed000036
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:3976200246 lbl:0 smac:70d3.79be.ae61 dmac:d4ad.71b5.ddf1
        sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
        vlan_id:0 vrf_id:0 ri:0x7f0650a6f4f8, ri_id:0x40 phd1:0x8400004c, ref_cnt:1
        si:0x7f0650a73088, si_id:0x4013, di_id:0x5360
    ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0xa2000025, }

```

Risoluzione dei problemi relativi alla scalabilità hardware

Le informazioni contenute in questa sezione permettono di risolvere i problemi relativi alla configurazione.

Syslog hardware MPLS

Se si esaurisce una determinata risorsa, ad esempio le etichette MPLS, il sistema genera un messaggio SYSLOG.

Punti chiave da ricordare

- MPLS LABEL viene utilizzato per la **disposizione delle etichette**. (Questa risorsa viene utilizzata quando i prefissi vengono appresi da un CE locale)
- LSPA viene utilizzato per l'**imposizione di etichette**. (Questa risorsa viene utilizzata quando i prefissi vengono appresi da un PE remoto)

Messaggio di log MPLS	Definizione	Azione di ripristino
%FED_L3_ERRMSG-3-RSRC_ERR: Interruttore 1 R0/0: feed: impossibile allocare la risorsa hardware per la voce fib a causa dell'esaurimento delle risorse hardware	Spazio esaurito nell'hardware riservato ai prefissi IP (EM o TCAM)	Eseguire una delle azioni seguenti per ridurre il numero di prefissi appresi dal PE locale o remoto : 1. Riepilogare i prefissi a CE 2. Modificare la modalità di allocazione delle etichette da prefisso a vrf
%FED_L3_ERRMSG-3- mpls_out_of_resource: Interruttore 1 R0/0: alimentazione: Risorsa insufficiente per la VOCE LABEL MPLS . Impossibile programmare l'etichetta locale:8205	Allocazione etichetta locale: lo spazio dell'hardware riservato per le etichette locali MPLS è esaurito (EM o TCAM)	Eseguire una delle azioni seguenti per ridurre il numero di etichette utilizzate in PE locale : 1. Riepilogare i prefissi nel CE locale o nel PE locale

(8192/8192) nell'hardware

%FED_L3_ERRMSG-3-MPLS_LENTRY_PAUSE: Interruttore 1 R0/0: alimentazione: **Raggiunto limite critico per la risorsa MPLS LABEL ENTRY. Creazione voce sospesa.**

Allocazione etichetta locale:
Spazio esaurito (EM o TCAM) nell'hardware riservato alle etichette locali MPLS

%FED_L3_ERRMSG-3-mpls_out_of_resource: Interruttore 1 R0/0: alimentazione: **Risorse insufficienti per MPLS LSPA. Impossibile programmare nell'hardware**

Allocazione etichetta remota:
Spazio esaurito nell'hardware riservato alle etichette remote LSPA

2. Modificare la modalità di allocazione delle etichette da prefisso a vrf sul PE locale
Eseguire una delle azioni seguenti per ridurre il numero di etichette utilizzate in **PE locale**:

1. Riepilogare i prefissi nel CE locale o nel PE locale
2. Modificare la modalità di allocazione delle etichette da prefisso a vrf sul PE locale

Eseguire una delle azioni seguenti per ridurre il numero di etichette utilizzate in **PE remoto**:

1. Riepilogare i prefissi nel CE PE remoto
2. Modificare la modalità di allocazione delle etichette da prefisso a vrf sul PE remoto


Comandi di convalida hardware

`show platform hardware fed active fwd-asic resource tcam utilization` command è la prima posizione da prendere in considerazione per valutare se si è verificato un problema di scala hardware. Le informazioni vengono visualizzate per ASIC.

Questa sezione mostra i prefissi di apprendimento PE da BGP in MPLS vrf con i parametri descritti di seguito:

- Viene utilizzata l'allocazione predefinita delle etichette per prefisso
- PE è C9300-48U con Cisco IOS-XE 17.3.4
- CE è Ixia come router adiacente BGP che annuncia i prefissi a un'interfaccia in vrf MPLS
- La lunghezza del prefisso utilizzata è /28. Pertanto, la piattaforma utilizza TCAM per le lunghezze dei prefissi /31 o più brevi
- Questa piattaforma utilizza la memoria EM prima per le etichette MPLS/BGP, quindi esegue il overflow in TCAM se EM diventa pieno

Topologia

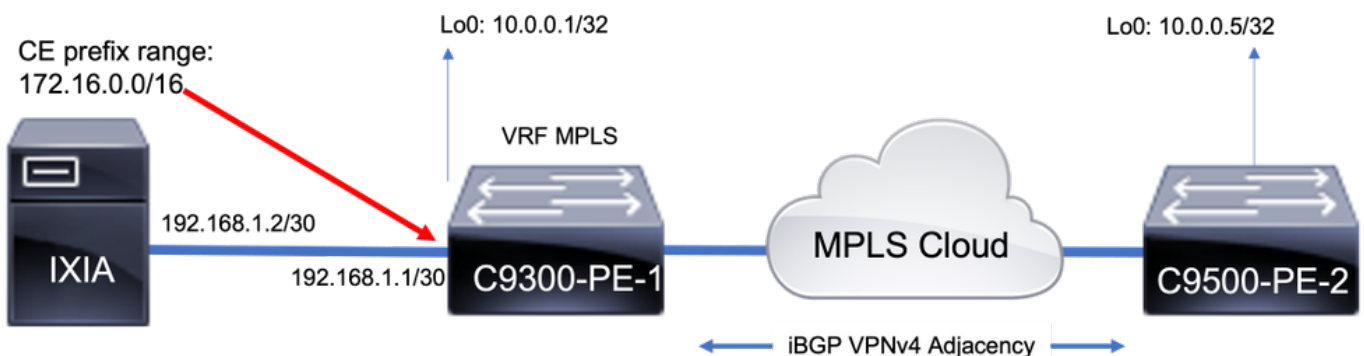

Utilizzo risorse previsto

Prima di aggiungere altri prefissi, è possibile utilizzare le seguenti funzioni di base:

- Questa linea di base è stata definita dopo la formazione dei vicini LDP MPLS nella tabella globale
- Da questa base, i prefissi VPNv4 vengono aggiunti in VRF MPLS
- I numeri di riferimento possono variare. Dipende da cosa è già stato programmato sullo switch

Nota: In questo esempio, i prefissi vengono aggiunti da un lato CE-PE, il che si traduce in risorse come LSPA allocate solo sul PE remoto che devono utilizzare uno stack di etichette per la raggiungibilità. Negli scenari reali, la risorsa verrebbe allocata su entrambi i dispositivi PE.

```
C9300-48U#show version | inc IOS
Cisco IOS XE Software, Version 17.03.04
Cisco IOS Software [Amsterdam], Catalyst L3 Switch Software (CAT9K_IOSXE), Version 17.3.4,
RELEASE SOFTWARE (fc3)
```

```
C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable
```

```
CAM Utilization for ASIC [0]
```

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	20	0.06%	0	0	0
20								
Mac Address Table	TCAM	I	1024	21	2.05%	0	0	0
21								
L3 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	512	9	1.76%	3	6	0
0								
L2 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L2 Multicast	TCAM	I	512	11	2.15%	3	8	0
0								
IP Route Table	EM	I	24576	23	0.09%	14	0	9
0 <-- 23 EM (hash) base usage								
IP Route Table	TCAM	I	8192	25	0.31%	12	10	2
1 <-- 25 TCAM base usage								

```
C9300-48U#show platform software fed switch active mpls summary | b Resource shar
```

```
Resource sharing info:
```

```
SI: 4/65536
```

```
RI: 10/65536
```

```
Well Known Index: 49/2048
```

```
Tcam: 21/57344
```

```
lv1_ecr: 0/64
```

```
lv2_ecr: 0/256
```

```
lspa: 0/16385
```

```
label_stack_id: 2/65537
```

```
vpn_spoke_id: 0/255
```

```
indirect_si: 0/255
```

```
RSM resource database stats:
```

```
Num of (L3+mpls) ADJ entries allocated: 36/131072
```

```
Num of LABEL entries allocated: 4/8192 <-- Baseline label usage = 4 (label entries allocated on local PE-CE side)
```

```
Num of LSPA entries allocated: 0/8192 <-- LSPA resource used when prefix learnt from another PE, not from a local CE (The SDM template determines max value)
```

```
Num of local adjs in mpls adjs: 3
```



```

Num of SI stats allocated: 6/49152
Adjs stats allocated by MPLS:
Num of mpls adjs: 11
Num of L3 adjs: 0
Num of VPN prefix_id: 0
<...snip...>

```

Other MPLS resource alloc error stats: <-- reported resource allocation issues shown here

```

LENTY out-of-resource errors: 0
LENTY general errors: 0
LSPA out-of-resource errors: 0
LSPA general errors: 0
ADJ out-of-resource errors: 0
SI stats alloc error: 0
MPLS ADJ stats error: 0
MPLS ADJ stats last error rc: 0

```

Nota: SI/RI/DI sono risorse necessarie per la riscrittura dei pacchetti, la porta di destinazione e così via. Per risolvere i problemi relativi a SI/DI/RI, vedere l'articolo [Informazioni sulle risorse hardware sugli switch Catalyst 9000](#)

Aggiungi prefissi 1000 BGP VPNv4

Sistema adiacente (Ixia) presentato con 1000 prefissi aggiunti a VRF MPLS da CE

9300 Local PE (collegato a CE)

```

C9300-48U#show bgp vpnv4 unicast all summary
BGP router identifier 10.0.0.1, local AS number 65000
<...snip...> Neighbor V AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down State/PfxRcd 10.0.0.5 4 65000
102 304 3001 0 0 01:28:23 0 192.168.1.2 4 65005 102 5 3001 0 0
00:00:58 1000 <-- PE learns 1000 prefixes from CE device
C9300-48U#show bgp vpnv4 unicast all | count /28
Number of lines which match regexp = 1000 <-- All 1000 prefixes are /28
C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

```

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								
Mac Address Table	EM	I	32768	20	0.06%	0	0	0
Mac Address Table	TCAM	I	1024	21	2.05%	0	0	0
L3 Multicast	EM	I	8192	0	0.00%	0	0	0
L3 Multicast	TCAM	I	512	9	1.76%	3	6	0
L2 Multicast	EM	I	8192	0	0.00%	0	0	0
L2 Multicast	TCAM	I	512	11	2.15%	3	8	0
IP Route Table	EM	I	24576	2023	8.23%	14	0	2009
IP Route Table	TCAM	I	8192	1025	12.51%	1012	10	2

<-- 25 base + 1000 /28 prefixes = 1025 TCAM entries

CTS Cell Matrix/VPN

Label EM O 32768 992 3.03% 0 0 992

0 <-- MPLS VPN used 992 entries

CTS Cell Matrix/VPN

Label TCAM O 768 9 1.17% 0 0 8 1

<-- 1000 /28 IPv4 prefixes learned from remote PE (On the 9500HP these /28 prefixes are be stored in EM/LPM memory, not TCAM)

<-- Hardware shared between CTS and VPN (resource is used when prefixes learned PE-PE, label imposition)

C9500-24Y4C#show platform software fed active mpls summary | b Resource shar

Resource sharing info:

SI: 4/131072

RI: 11/98304

Well Known Index: 48/2048

Tcam: 20/245760

lv1_ecr: 0/64

lv2_ecr: 0/256

lspa: 1000/65536

label_stack_id: 2/65537

vpn_spoke_id: 0/255

indirect_si: 0/255

RSM resource database stats:

Num of (L3+mpls) ADJ entries allocated: 37/196608

Num of LABEL entries allocated: 4/45056

<-- LABEL does not increase (no

prefixes learnt from a local CE)

Num of LSPA entries allocated: 1000/32768

<-- LSPA usage increased by 1000

(these prefixes require label stack to reach)

Num of local adjs in mpls adjs: 4

Num of SI stats allocated: 6/49152

Adjs stats allocated by MPLS:

Num of mpls adjs: 12

Num of L3 adjs: 0

Num of VPN prefix_id: 1000

AL MPLS SI/RI resource alloc stats:

SI allocated: 1

RI allocated: 6

SI_STATS allocated: 6

Unknowns allocs: 0

Alloc no resource: 0

Alloc errors: 0

Free errors: 0

Invalid free: 0

Free unknown: 0

Other MPLS resource alloc error stats:

<-- no resource allocation issues

LENTY out-of-resource errors: 0

LENTY general errors: 0

LSPA out-of-resource errors: 0

LSPA general errors: 0

ADJ out-of-resource errors: 0

SI stats alloc error: 0

MPLS ADJ stats error: 0

MPLS ADJ stats last error rc: 0

<-- Different resources are allocated to reach a local prefix (LABEL) versus a remote prefix (LSPA)

Nota: Per informazioni generali su Catalyst 9000 TCAM o per dettagli su come verificare la presenza di altre funzionalità su TCAM, vedere l'articolo [Informazioni sulle risorse hardware sugli switch Catalyst 9000](#).

Nota: ADJ (adiacenze) sono una risorsa condivisa. Per risolvere i problemi con ADJ, vedere l'articolo [Informazioni sulle risorse hardware sugli switch Catalyst 9000](#).

Etichetta MPLS e correzione del limite di scala IPv4

Nella maggior parte dei casi in cui viene utilizzata la funzionalità MPLS e vengono utilizzate troppe risorse hardware, può essere utile modificare l'allocazione delle etichette da (predefinito) per prefisso a per vrf. In questo esempio si consideri l'allocazione delle risorse prima e dopo (in questo caso, il dispositivo CE-PE è il 9500).

Usage with per-prefix label allocation

```
C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization
```

```
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable
```

```
CAM Utilization for ASIC [0]
```

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	3023	1.42%	1014	0	2009
0 <-- 1 IPv4 prefix entry + 2 entries for labels (2 labels created per every 1 IPv4 prefix)								
IP Route Table	TCAM	I	1536	17	1.11%	12	3	2
0								

New usage after change to per-vrf lable allocation

```
C9500-24Y4C(config)#mpls label mode vrf MPLS protocol all-afs per-vrf
```

```
C9500-24Y4C#show bgp vpnv4 unicast all BGP table version is 164901, local router ID is 10.0.0.5
```

```
Network Next Hop Metric LocPrf Weight Path
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
Network Next Hop Metric LocPrf Weight Path
Route Distinguisher: 1:1 (default for vrf MPLS) *> 172.30.0.0/24 192.168.3.2 2219
0 65100 65101 65102 65103 {65104} e
<...snip...>
```

```
C9500-24Y4C#show bgp vpnv4 unicast all 172.30.0.0
```

```
BGP routing table entry for 1:1:172.30.0.0/24, version 163902
```

```
Paths: (1 available, best #1, table MPLS)
```

```
Advertised to update-groups:
```

```
8
```

```
Refresh Epoch 1
```

```
65100 65101 65102 65103 {65104}
```

```
192.168.3.2 (via vrf MPLS) from 192.168.3.2 (192.168.3.2)
```

Origin EGP, metric 2219, localpref 100, valid, external, best

Extended Community: RT:1:1

mpls labels in/out IPv4 **VRF Aggr:18116/nolabel** <-- Verify you see a 'VRF Aggr' label

type

rx pathid: 0, tx pathid: 0x0

Updated on Dec 9 2021 19:50:22 UTC

Usage with per-vrf label allocation

Allocation on both local and remote PE is dramatically reduced via change to label allocation mode

local switch (PE-CE)

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table 19	EM	I	32768	19	0.06%	0	0	0
Mac Address Table 21	TCAM	I	768	21	2.73%	0	0	0
L3 Multicast 0	EM	I	32768	0	0.00%	0	0	0
L3 Multicast 0	TCAM	I	768	6	0.78%	3	3	0
L2 Multicast 0	TCAM	I	2304	7	0.30%	3	4	0
IP Route Table 0	EM/LPM	I	212992	1025	0.48%	1014	0	11
<-- one local LABEL used to reach the CE learnt prefixes								
IP Route Table 0	TCAM	I	1536	17	1.11%	12	3	2
QOS ACL 10	TCAM	I	1024	45	4.39%	15	20	0

remote switch (PE-PE)

C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

<...snip...>								
IP Route Table 0	EM	I	24576	23	0.09%	14	0	9
IP Route Table 1	TCAM	I	8192	1025	12.51%	1012	10	2
<-- Still 1:1 usage for IPv4 prefixes								
<...snip...>								
CTS Cell Matrix/VPN								
Label 0	EM	O	8192	1	0.01%	0	0	1
<-- one remote LSPA used to reach the PE learnt prefixes								

Nota: L'utilizzo delle risorse in **show platform software fed switch active mpls summary** mostra anche questa riduzione in LABEL o LSPA (a seconda dei casi).

Comandi da raccogliere per TAC

In questa guida vengono descritti i problemi più comuni relativi alle risorse hardware correlati a MPLS, con le procedure di risoluzione appropriate. Tuttavia, nel caso in cui questa guida non risolva il problema, raccogliere l'elenco di comandi visualizzato e allegarlo alla richiesta di servizio.

```
show ip route summary
show ip bgp vpnv4 all | redirect flash:bgp_vpnv4_all
show ip bgp vpnv4 all summary
show ip route vrf <vrf-name> summary
show mpls forwarding-table summary
show ip cef vrf <name> | redirect flash:sh_ip_cef_vrf_<name>
show ip cef vrf <name> summary
show platform software fed switch active ip route summary
show platform software mpls switch <all switches> f0 forwarding-table
show platform software mpls switch <all switches> f0 label
show platform software mpls switch <all switches> f0 eos
show platform software object-manager switch <all switches> f0 error-object
show platform software object-manager switch <all switches> f0 pending-issue-update
show platform software fed switch <all switches> mpls label_oce all detail
show platform software fed switch <all switches> mpls eos all det
show platform software fed switch <all switches> mpls summary
show platform software fed switch active mpls forwarding all detail
show platform software object-manager switch 1 f0 statistics
show tech-support mpls | redirect flash:sh_tech_mpls
show logging | redirect flash:sh_logging_console
show platform hard fed switch active fwd resource tcam table sghash asic 0 format 0 | redirect
flash:vpn_lspa
```

```
request platform software trace archive last 30 days target flash
```

Informazioni correlate

[Documentazione e supporto tecnico – Cisco Systems](#)

[Guida alla configurazione di Multiprotocol Label Switching \(MPLS\), Cisco IOS XE Cupertino 17.7.x \(switch Catalyst 9300\)](#)

[Guida alla configurazione di Multiprotocol Label Switching \(MPLS\), Cisco IOS XE Cupertino 17.7.x \(switch Catalyst 9500\)](#)

[Conoscenza delle risorse hardware sugli switch Catalyst 9000](#)