

# Cisco Nexus 9300-GX Series Switches

---

# Contents

Product overview	3
Switch models	3
Features and benefits	5
Specifications	7
Performance and scalability	9
Regulatory standards compliance	11
Supported optics: Pluggable	12
Ordering information	12
Warranty	14
Cisco environmental sustainability	14
Service and support	15
Cisco Capital	15
For more information	15
Document history	16

## Product overview

Based on [Cisco® Cloud Scale technology](#), the Cisco Nexus® 9300-GX switches are the next generation of fixed Cisco Nexus 9000 Series Switches capable of supporting 400 Gigabit Ethernet (GE). With the increase in use cases for applications requiring Artificial Intelligence (AI) and Machine Learning (ML), the platform addresses the need for high-performance, power-efficient, compact switches in the networking infrastructure. These switches are designed to support 100G and 400G fabrics for mobile service provider environments, including the network edge, 5G, IoT, Professional Media Networking platform (PMN), and Network Functions Virtualization (NFV). The platform introduces a backward-compatible 400G optical interface Quad Small Form-Factor Pluggable - Double Density (QSFP-DD) to transparently migrate existing data center fabrics from 40-Gbps and 100-Gbps speeds to 400 Gbps and also offers various lower port speeds and densities, including 10, 25, 50, and 200 Gbps using breakouts. The Cisco Nexus 9300-GX provides investment protection for customers, delivering higher performance to meet scaled out spine-leaf fabrics to support growing traffic for cloud applications.

Cisco provides two modes of operation for Cisco Nexus 9000 Series Switches. Organizations can deploy Cisco Application Centric Infrastructure (Cisco ACI®) or Cisco NX-OS mode.

[Cisco ACI](#) is a holistic, intent-driven architecture with centralized automation and policy-based application profiles. It provides a robust, transport network for dynamic workloads and is built on a network fabric that combines time-tested protocols with new innovations to create a highly flexible, scalable, and resilient architecture of low-latency, high-bandwidth links. This fabric delivers a network that can support the most demanding and flexible data center environments.

Designed for the programmable network, the [Cisco NX-OS](#) operating system automates configuration and management for customers who want to take advantage of the DevOps operation model and tool sets.

## Switch models

Table 1 summarizes the Cisco Nexus GX Series Switches.

**Table 1.** Cisco Nexus 9300 switches

Model	Description
<b>Cisco Nexus 9316D Switch</b>	16 x 400/100-Gbps QSFP-DD ports
<b>Cisco Nexus 93600CD Switch</b>	28 x 100/40-Gbps Quad Small Form-Factor Pluggable (QSFP28) and 8 x 400/100-Gbps QSFP-DD ports
<b>Cisco Nexus 9364C Switch</b>	64 x 100/40-Gbps Quad Small Form-Factor Pluggable (QSFP28)

The Cisco Nexus 9316D-GX Switch (Figure 1) is a 1RU switch that supports 12.8 Tbps of bandwidth and over 4.3 bpps. The switch can be configured to work as 10/25/40/50/100/200/400-Gbps offering flexible options in a compact form factor. Please see feature table below for more information.




**Figure 1.**  
Cisco Nexus 9316D Switch

The Cisco Nexus 93600CD-GX Switch (Figure 2) is a 1RU switch that supports 12 Tbps of bandwidth and 4.0 bpps across 28 fixed 40/100G QSFP-28 ports and 8 fixed 10/25/40/50/100/200/400G QSFP-DD ports. The 28 ports support 10/25-Gbps. Please see feature table below for more information.



**Figure 2.**  
Cisco Nexus 93600CD Switch

The Cisco Nexus 9364C-GX Switch (Figure 3) is a 2RU switch that supports 12.8 Tbps of bandwidth and over 4.3 bpps across 64 fixed 40/100G QSFP-28 ports. Please see feature table below for more information.

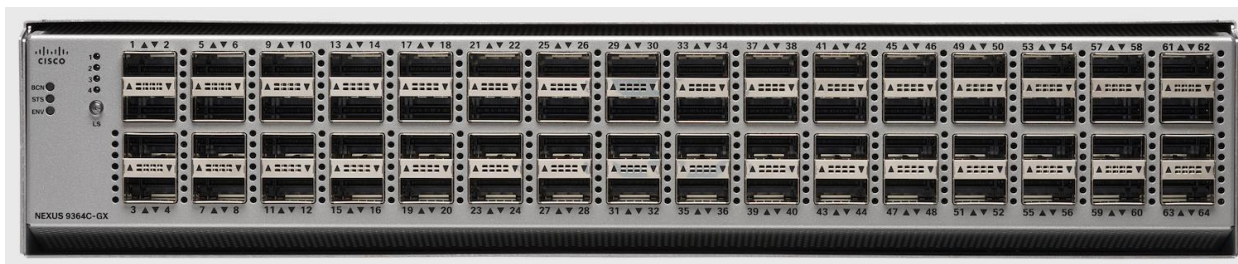

**Figure 3.**  
Cisco Nexus 9364C Switch

---

## Features and benefits

The Cisco Nexus 9300-GX Series provides the following features and benefits:

- **Architectural flexibility**
  - Virtual Extensible LAN (VXLAN) Ethernet VPN (EVPN) fabrics, inclusive of hierarchical multisite support (Refer to the VXLAN network with Multiprotocol BGP [MP-BGP] EVPN control plane for more information)
  - Three-tier Border Gateway Protocol (BGP) architectures, enabling horizontal, nonblocking IPv6 network fabrics at web scale
  - Comprehensive protocol support for Layer-3 (v4 and v6) unicast and multicast routing protocol suites, including BGP, Open Shortest Path First (OSPF), Enhanced Interior Gateway Routing Protocol (EIGRP), Routing Information Protocol Version 2 (RIPv2), Protocol Independent Multicast Sparse Mode (PIM-SM), Source-Specific Multicast (SSM), and Multicast Source Discovery Protocol (MSDP)
  - Segment Routing (SR and SRv6) enables the network to forward Multiprotocol Label Switching (MPLS) packets and to engineer traffic without Resource Reservation Protocol (RSVP) Traffic Engineering (TE). It provides a control-plane alternative for increased network scalability and virtualization. Cisco IP Fabric for Media helps you migrate from an SDI router to an IP-based infrastructure. In an IP-based infrastructure, a single cable has the capacity to carry multiple bidirectional traffic flows and can support different flow sizes without requiring changes to the physical infrastructure.
  - Nexus Dashboard Data Broker provides customers with complete observability into their network and solution(s) that can help them to identify and mitigate security threats, realize and remediate performance bottlenecks, adhere to data compliance, and have insight into capacity planning operations.
- **Extensive programmability**
  - Day-zero automation through Power On Auto Provisioning (POAP), drastically reducing provisioning time
  - Industry-leading integrations for leading DevOps configuration management applications, such as Ansible. Extensive native YANG and industry-standard OpenConfig model support through RESTCONF/NETCONF/gNMI.
  - REST API interacting with Data Management Engine (DME)
  - Model-driven telemetry, which enhances network observability
  - Third-party application hosting using Cisco Application Framework (CAF)
- **High scalability, flexibility, and security**
  - Flexible forwarding tables support up to one million shared entries on GX models. Flexible use of TCAM space allows for custom definition of Access Control List (ACL) templates

---

- **AI/ML networking**

- Cisco Nexus 9300 GX Series Fixed Switches support innovative congestion management and flow control algorithms along with the right latency and telemetry to meet the design requirements of AI/ML fabrics.
- Priority Flow Control (PFC) is a key capability supported on Cisco Nexus 9000 Series Switches that prevents Ethernet frame drops by signaling, controlling, and managing Ethernet flows along the path by sending pause frames to appropriate senders.
- The platform also supports Explicit Congestion Notification (ECN), which provides end-to-end notification per IP flow by marking packets that experienced congestion, without dropping traffic. The platform is capable of tracking ECN statistics, including the number of marked packets that have experienced congestion.
- The platform offers lossless transport for Remote Direct Memory Access (RDMA) over Converged Ethernet (RoCE) with the support of Data Center Bridging (DCB) protocols:
  - Enhanced Transmission Selection (ETS) reserves bandwidth per priority class in network contention situations.
  - Data Center Bridging Exchange Protocol (DCBX) can discover and exchange priority and bandwidth information with endpoints.
- Weighted Random Early Detection (WRED) is a congestion-avoidance technique that allows Cisco Nexus 9000 Series Switches to detect and react to congestion in the network by marking flows that could cause congestion.
- The platform offers Cisco's innovative intelligent buffer management, which offers the capability to distinguish mice and elephant flows and apply different queue-management schemes to them based on their network forwarding requirements in the event of link congestion.
- Approximate Fair Dropping (AFD) with Elephant Trap (ETRAP). By using ETRAP, AFD distinguishes long-lived elephant flows from short-lived mice flows. ETRAP measures the byte counts of incoming flows and compares this against the user-defined ETRAP threshold. After a flow crosses the threshold, it becomes an elephant flow.
- Dynamic Packet Prioritization (DPP) provides the capability of separating mice flows and elephant flows into two different queues so that buffer space can be allocated to them independently.

- **Hardware and software high availability**

- Virtual Port-Channel (vPC) technology provides Layer 2 multipathing through the elimination of Spanning Tree Protocol (STP). It also enables fully utilized bisectional bandwidth and simplified Layer 2 logical topologies without the need to change the existing management and deployment models.
- The 64-way Equal-Cost MultiPath (ECMP) routing enables the use of Layer 3 fat-tree designs. This feature helps organizations prevent network bottlenecks, increase resiliency, and add capacity with little network disruption.
- Software Maintenance Upgrade (SMU) contains fixes for a specific defect. They provide a quick resolution of critical issues.

- In-Service Software Upgrades (ISSUs) enable upgrades of device software while the switch continues to forward traffic. ISSUs reduce or eliminate the downtime typically caused by software upgrades.
- The switches use hot-swappable Power-Supply Units (PSUs) and fans with N+1 redundancy.

- **Cisco Nexus Dashboard**

- Cisco Nexus Dashboard is a platform that transforms data-center and cloud network operations through simplicity, automation, and analytics. Cisco Nexus Dashboard Fabric Controller (NDFC), Cisco Nexus Dashboard Insights (NDI), Cisco Nexus Dashboard Orchestrator (NDO), and Cisco Nexus Dashboard Data Broker (NDDDB) are integrated as services into Cisco Nexus Dashboard.
- Cisco Nexus Dashboard is included with all Cisco Nexus 9000 switch tiered licenses. Cisco Nexus Dashboard Fabric Controller requires the Cisco Data Center Networking (DCN) Essentials license, Cisco Nexus Dashboard Orchestrator requires Cisco DCN Advantage, and Cisco Nexus Dashboard Insights requires the Cisco DCN Premier or Cisco DCN Day-2 Ops add-on license.

## Specifications

Table 2 lists the specifications for the Cisco Nexus GX Series fixed switches.

**Table 2.** Cisco Nexus 9300-GX Series switch specifications

Item	Specifications		
Device	N9K-C9316D-GX	N9K-C93600CD-GX	N9K-C9364C-GX
<b>Ports</b>	<ul style="list-style-type: none"> <li>• 16 x 400/100/40-Gbps QSFP-DD ports</li> </ul>	<ul style="list-style-type: none"> <li>• 28 x 100/40-Gbps QSFP28 ports and 8 x 400/100-Gbps QSFP-DD ports</li> </ul>	<ul style="list-style-type: none"> <li>• 64 x 100/40-Gbps QSFP28 ports</li> </ul>
<b>Supported speeds</b>	<ul style="list-style-type: none"> <li>• 40/100/400-Gbps Ethernet</li> <li>• Breakout supported on all ports, 1-16: 2x200, 4x100, 2x100, 8x50, 4x50, 2x50, 4x25, 4x10</li> <li>• 10G w/QSA</li> </ul>	<ul style="list-style-type: none"> <li>• 40/100-Gbps on downlinks</li> <li>• 40/100/400-Gbps on uplinks</li> <li>• Breakout supported:               <ul style="list-style-type: none"> <li>◦ 1-24: 2x50G on all ports, 4x10G and 4x25G on odd ports with even ports purged</li> <li>◦ 25-28: 2x50G, 4x10G, 4x25G on all ports</li> <li>◦ 29-36: 2x50G, 4x10G, 4x25G, 4x100G on converted downlinks</li> </ul> </li> <li>• 10G w/QSA</li> </ul>	<ul style="list-style-type: none"> <li>• 40/100-Gbps</li> <li>• Breakout supported:               <ul style="list-style-type: none"> <li>• 2x50, 2x25, 2x10 on all ports</li> <li>• 4x10, 4x25G on all odd numbered ports</li> </ul> </li> <li>• 10G w/QSA</li> </ul>
<b>CPU</b>	<ul style="list-style-type: none"> <li>• 4 cores</li> </ul>	<ul style="list-style-type: none"> <li>• 4 cores</li> </ul>	<ul style="list-style-type: none"> <li>• 4 cores</li> </ul>
<b>System memory</b>	<ul style="list-style-type: none"> <li>• 32 GB</li> </ul>	<ul style="list-style-type: none"> <li>• 32 GB</li> </ul>	<ul style="list-style-type: none"> <li>• Up to 32 GB</li> </ul>
<b>SSD Drive</b>	<ul style="list-style-type: none"> <li>• 128 GB</li> </ul>	<ul style="list-style-type: none"> <li>• 128 GB</li> </ul>	<ul style="list-style-type: none"> <li>• 128 GB</li> </ul>
<b>System buffer</b>	<ul style="list-style-type: none"> <li>• 80 MB</li> </ul>	<ul style="list-style-type: none"> <li>• 80 MB</li> </ul>	<ul style="list-style-type: none"> <li>• 80 MB</li> </ul>
<b>Management ports</b>	<ul style="list-style-type: none"> <li>• 2 ports: 1 RJ-45 and 1 SFP</li> </ul>	<ul style="list-style-type: none"> <li>• 2 ports: 1 RJ-45 and 1 SFP</li> </ul>	<ul style="list-style-type: none"> <li>• 2 ports: 1 RJ-45 and 1 SFP</li> </ul>
<b>USB Ports</b>	<ul style="list-style-type: none"> <li>• 1</li> </ul>	<ul style="list-style-type: none"> <li>• 1</li> </ul>	<ul style="list-style-type: none"> <li>• 1</li> </ul>

Item	Specifications		
<b>RS-232 serial ports</b>	• 1	• 1	• 1
<b>Power Supplies</b>	• 1100W AC, 1100W DC, 1100W HVAC/HVDC	• 1100W AC, 1100W DC, 1100W HVAC/HVDC	• 2000W AC, 2000W DC, 2000W HVAC/HVDC
<b>Typical power (AC)</b>	• 420W	• 586W	• 811W
<b>Maximum power (AC)</b>	• 1010W	• 1071W	• 1622W
<b>Input voltage (AC)</b>	• 100 to 240V	• 100 to 240V	• 100 to 240V
<b>Input voltage (High-Voltage AC [HVAC])</b>	• 100 to 277V	• 100 to 277V	• 100 to 277V
<b>Input voltage (DC)</b>	• -40 to -72V	• -40 to -72V	• -40 to -72V
<b>Input voltage (High-Voltage DC [HVDC])</b>	• -240 to -380V	• -240 to -380V	• -240 to -380V
<b>Frequency (AC)</b>	• 50 to 60 Hz	• 50 to 60 Hz	• 50 to 60 Hz
<b>Fans</b>	• 5+1 redundancy	• 5+1 redundancy	• 3+1 redundancy
<b>Airflow</b>	• Port-side intake and exhaust	• Port-side intake and exhaust	• Port-side intake and exhaust
<b>Physical dimensions (H x W x D)</b>	• (H x W x D): 1.72 x 17.37 x 25.5 in. (4.37 x 44.13 x 64.8 cm)	• (H x W x D): 1.72 x 17.37 x 25.5 in. (4.37 x 44.13 x 64.8 cm)	• Dimensions (H x W x D): 3.39 x 17.41 x 22.59 in. (8.61 x 44.23 x 57.4 cm)
<b>Acoustics</b>	• 73.2 dBA at 50% fan speed, 81.8 dBA at 70% fan speed, and 88.8 dBA at 100% fan speed	• 73.2 dBA at 50% fan speed, 81.8 dBA at 70% fan speed, and 88.8 dBA at 100% fan speed	• 77.3 dBA at 50% fan speed, 88.6 dBA at 70% fan speed, and 95.8 dBA at 100% fan speed
<b>RoHS compliance</b>	• Yes	• Yes	• Yes
<b>Mean Time Between Failure (MTBF)</b>	• 323,140 hours	• 295,515 hours	• 237,760 hours
<b>Minimum ACI image</b>	• ACI-N9KDK9-14.2(2e)	• ACI-N9KDK9-14.2(2e)	• ACI-N9KDK9-14.2(3)
<b>Minimum NX-OS image</b>	• NXOS-9.3.3	• NXOS-9.3.3	• NXOS-9.3.3

The Cisco Nexus GX Series also introduces support of single-chip ACI spine-and-leaf functionality to enable customers to use a given GX series device, either in ACI spine or ACI leaf deployment for fully flexible deployments.



**Table 3.** ACI support

Item	N9K-C9316D-GX	N9K-C93600CD-GX	N9K-C9364C-GX
ACI spine	Yes	Yes	Yes
ACI leaf	Yes	Yes	Yes

## Performance and scalability

Table 4 lists the performance and scalability specifications for the Cisco Nexus GX Series Switches.

**Table 4.** Performance and scalability specifications\*

Item	Cisco Nexus 9300-GX Series Switches
Maximum number of IPv4 Longest Prefix Match (LPM) routes**	896,000
Maximum number of IPv4 host entries**	896,000
Maximum number of IPv6 Longest Prefix Match (LPM) routes**	448,000
Maximum number of IPv6 host entries**	896,000
Maximum number of MAC address entries**	256,000
Maximum number of multicast routes	32,000
Number of Internet Group Management Protocol (IGMP) snooping groups	Shipping: 8000 Maximum: 32,000
Maximum number of Access-Control-List (ACL) entries	Per slice of the forwarding engine: <ul style="list-style-type: none"> <li>• 5000 ingress</li> <li>• 2000 egress</li> <li>• Max: 20,000 ingress, 8000 egress</li> </ul>
Maximum number of VLANs	4096***
Number of Virtual Routing and Forwarding (VRF) instances	Shipping: 1000 Maximum: 16,000
Maximum number of ECMP paths	64
Maximum number of port channels	512
Maximum number of links in a port channel	32
Number of active SPAN sessions	4
Maximum number of VLANs in Rapid per-VLAN Spanning Tree (RPVST) instances	3967

Item	Cisco Nexus 9300-GX Series Switches
Maximum number of Hot-Standby Router Protocol (HSRP) groups	490
Maximum number of Multiple Spanning Tree (MST) instances	64
Flow-table size used for Cisco Tetration Analytics platform	64,000
Number of Network Address Translation (NAT) entries	1023

\* More templates and greater scalability are on the roadmap. Refer to the [Cisco Nexus 9000 Series Verified Scalability Guide](#) and [Cisco Application Policy Infrastructure Controller](#) for the latest, exact scalability numbers validated for specific software.

\*\* Raw capacity of flow table

\*\*\* 127 VLANs out of 4096 are reserved

**Table 5.** Weight

Component	Weight
Cisco Nexus 9316D-GX without power supplies or fans	28.8 lbs (13 kg)
Cisco Nexus 93600CD-GX without power supplies or fans	28 lbs (12.7 kg)
Cisco Nexus 9364C-GX without power supplies or fans	29.2 lbs (13.2 kg)
2000W AC power supply	2.2 lbs (1 kg)
2000W DC power supply	2.2 lbs (1 kg)
2000W HVAC/HVDC power supply	2.42 lbs (1.1 kg)
1100W AC power supply	2.42 lbs (1.1 kg)
1100W DC power supply	2.45 lbs (1.11 kg)
1100W HVAC/HVDC power supply	2.46 lbs (1.12 kg)
Fan tray: NXA-FAN-35CFM-PE or NXA-FAN-35CFM-PI	0.25 lbs (0.1 kg)
NXA-FAN-160CFM2PI or NXA-FAN-160CFM2PE	1.3 lbs (0.59 kg)

## Regulatory standards compliance

Table 6 summarizes regulatory standards compliance for the platform.

**Table 6.** Regulatory standards compliance: Safety and EMC

Specification	Description
<b>Regulatory compliance</b>	Products should comply with CE Markings according to directives 2004/108/EC and 2006/95/EC.
<b>Safety</b>	<ul style="list-style-type: none"> <li>• UL 60950-1 Second Edition</li> <li>• CAN/CSA-C22.2 No. 60950-1 Second Edition</li> <li>• EN 60950-1 Second Edition</li> <li>• IEC 60950-1 Second Edition</li> <li>• AS/NZS 60950-1</li> <li>• GB4943</li> </ul>
<b>EMC: Emissions</b>	<ul style="list-style-type: none"> <li>• 47CFR Part 15 (CFR 47) Class A</li> <li>• AS/NZS CISPR22 Class A</li> <li>• CISPR22 Class A</li> <li>• EN55022 Class A</li> <li>• ICES003 Class A</li> <li>• VCCI Class A</li> <li>• EN61000-3-2</li> <li>• EN61000-3-3</li> <li>• KN22 Class A</li> <li>• CNS13438 Class A</li> </ul> <p><b>Note:</b> Cisco Nexus N9K-C9364C passes EMC Radiated Emissions standards in all configurations, with the only exception being if more than 40 pluggable optics of Cisco part number 10-3142-02 (or 10-3142-01) are used.</p>
<b>EMC: Immunity</b>	<ul style="list-style-type: none"> <li>• EN55024</li> <li>• CISPR24</li> <li>• EN300386</li> <li>• KN 61000-4 series</li> </ul>
<b>RoHS</b>	The product is RoHS-6 compliant with exceptions for leaded Ball Grid-Array (BGA) balls and lead press-fit connectors.

## Supported optics: Pluggable

For details about the optical modules available and the minimum software release required for each supported optical module, visit:

[https://www.cisco.com/en/US/products/hw/modules/ps5455/products\\_device\\_support\\_tables\\_list.html](https://www.cisco.com/en/US/products/hw/modules/ps5455/products_device_support_tables_list.html).

## Ordering information

Tables 7, 8, and 9 present ordering information for the Cisco Nexus GX Series switches.

**Table 7.** N93-C9316D-GX ordering information

Part number	Product description
<b>Hardware</b>	
<b>N9K-C9316D-GX</b>	Nexus 9316D Spine switch with 16p 400/100G QSFP-DD
<b>Fan options</b>	
<b>NXA-FAN-35CFM-PI</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 35CFM, port side intake airflow
<b>NXA-FAN-35CFM-PE</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 35CFM, port side exhaust airflow
<b>Power supply options</b>	
<b>NXA-PAC-1100W-PI2</b>	Nexus AC 1100W PSU Spare - port side intake
<b>NXA-PAC-1100W-PE2</b>	Nexus AC 1100W PSU Spare - port side exhaust
<b>NXA-PDC-1100W-PI</b>	Nexus 1100W Platinum DC PS, port side intake
<b>NXA-PDC-1100W-PE</b>	Nexus 1100W Platinum DC PS, port side exhaust
<b>NXA-PHV-1100W-PI</b>	Nexus 1100W Platinum HV-AC-DC PS, port side intake
<b>NXA-PHV-1100W-PE</b>	Nexus 1100W Platinum HV-AC-DC PS, port side exhaust
<b>Accessories</b>	
<b>NXK-ACC-KIT-1RU</b>	Nexus 9000 Fixed Accessory Kit

**Table 8.** N93-C93600CD-GX ordering information

Part number	Product description
<b>Hardware</b>	
<b>N9K-C93600CD-GX</b>	Nexus 93600CD Spine and Leaf switch with 28p 100/40G QSFP28 and 8p 400/100G QSFP-DD
<b>Fan options</b>	
<b>NXA-FAN-35CFM-PI</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 35CFM, port side intake airflow
<b>NXA-FAN-35CFM-PE</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 35CFM, port side exhaust airflow
<b>Power supply options</b>	
<b>NXA-PAC-1100W-PI2</b>	Nexus AC 1100W PSU Spare - port side intake
<b>NXA-PAC-1100W-PE2</b>	Nexus AC 1100W PSU Spare - port side exhaust
<b>NXA-PDC-1100W-PI</b>	Nexus 1100W Platinum DC PS, port side intake
<b>NXA-PDC-1100W-PE</b>	Nexus 1100W Platinum DC PS, port side exhaust
<b>NXA-PHV-1100W-PI</b>	Nexus 1100W Platinum HV-AC-DC PS, port side intake
<b>NXA-PHV-1100W-PE</b>	Nexus 1100W Platinum HV-AC-DC PS, port side exhaust
<b>Accessories</b>	
<b>NXK-ACC-KIT-1RU</b>	Nexus 9000 Fixed Accessory Kit

**Table 9.** N93-C9364C-GX ordering information

Part number	Product description
<b>Hardware</b>	
<b>N9K-C9364C-GX</b>	Nexus 9364C Spine and Leaf switch with 64p 100/40G QSFP28
<b>Fan options</b>	
<b>NXA-FAN-160CFM2PI</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 160CFM, port side intake airflow
<b>NXA-FAN-160CFM2PE</b>	Nexus Fan, Nexus 2000, 3000, 9000 Single Fan, 160CFM, port side exhaust airflow

Part number	Product description
<b>Power supply options</b>	
<b>NXA-PAC-2KW-PI</b>	Nexus AC 2000W PSU Spare - port side intake
<b>NXA-PAC-2KW-PE</b>	Nexus AC 2000W PSU Spare - port side exhaust
<b>NXA-PDC-2KW-PI</b>	Nexus 2000W Platinum DC PS, port side intake
<b>NXA-PDC-2KW-PE</b>	Nexus 2000W Platinum DC PS, port side exhaust
<b>NXA-PHV-2KW-PI</b>	Nexus 2000W Platinum HV-AC-DC PS, port side intake
<b>Accessories</b>	
<b>N9K-C9300-RMK</b>	Nexus 9000 Fixed Rack Mount Kit
<b>N9K-C9300-ACK</b>	Nexus 9000 Fixed Accessory Kit

## Warranty

The Cisco Nexus 9300 platform switches have a 1-year limited hardware warranty. The warranty includes hardware replacement with a 10-day turnaround from receipt of a Return Materials Authorization (RMA).

## Cisco environmental sustainability

Information about Cisco’s environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the “Environment Sustainability” section of Cisco’s [Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the “Environment Sustainability” section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
<b>Information on product material content laws and regulations</b>	<a href="#">Materials</a>
<b>Information on electronic waste laws and regulations, including products, batteries, and packaging</b>	<a href="#">WEEE compliance</a>

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

---

## Service and support

Cisco offers a range of professional, solution, and product support services for each stage of your Cisco Nexus 9300 platform deployment:

- Cisco Data Center Quick Start Service for Cisco Nexus 9000 Series Switches - This offering provides consulting services that include technical advice and assistance to help deploy Cisco Nexus 9000 Series Switches
- Cisco Data Center Accelerated Deployment Service for Cisco Nexus 9000 Series Switches - This service delivers planning, design, and implementation expertise to bring your project into production. The service also provides recommended next steps, an architectural high-level design, and operation-readiness guidelines to scale the implementation to your environment
- Cisco Migration Service for Cisco Nexus 9000 Series Switches - This service helps you migrate from Cisco Catalyst® 6000 Series Switches to Cisco Nexus 9000 Series Switches
- Cisco product support - Our support service is available globally 24 hours a day, 7 days a week, for Cisco software and hardware products and technologies associated with Cisco Nexus 9000 Series Switches. Enhanced support options delivered by Cisco also include solution support for Cisco ACI, Cisco SMARTnet™ Service, and Cisco Smart Net Total Care®\* Service

For more information, visit <https://www.cisco.com/go/services>.

## Cisco Capital

### **Flexible payment solutions to help you achieve your objectives**

Cisco Capital® financing makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments.

[Learn more.](#)

## For more information

For more information about the Cisco Nexus 9000 Series and for the latest software release information and recommendations, visit <https://www.cisco.com/go/nexus9000>.

---

## Document history

New or revised topic	Described in	Date
Updated features and benefits section and, breakout support on N9K-C93600CD-GX	Table 2	November 15, 2023

**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)